


HD-TVI 2MP Intensifier® T Traditional Camera

HTINTT5T Accepts C & CS auto iris & manual type lenses, dark gray housing



lens not included

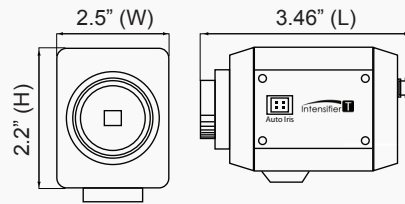

Features

- Full HD resolution over coax (HD-TVI)
- See color in almost complete darkness without IR LEDs
- Supports Full HD 1080p @ 30fps
- No problems caused by objects that reflect or absorb IR light sources
- True WDR operation
- With presets for different scenarios
- Full OSD operation via UTC (TVI output only)
- Additional analog output for 960H
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

Specifications

Image Sensor	1/3" Progressive Scan CMOS, 2MP
Resolution	1080p
Minimum Illumination	0.001 lux
Effective Pixels	1984 (H) x 1105 (V)
Total Pixels	2000 (H) x 1121 (V)
TV System	NTSC
Scanning Frequency	15.734kHz (H) / 59.94Hz (V)
Scanning System	Progressive
Synchronization	Internal
Communication	UTC
S/N Ratio	more than 50dB
Video Output	CVBS: 1.0Vp-p / 75 ohms
Electronic Shutter Speed	Auto / Manual
OSD	Available
DWDR	On / Off (level adjustable)
Backlight Compensation	BLC / HLC / Off
Day/Night	Color / BW / Auto / Ext

AGC	Level adjustable
White Balance	ATW / Push / Manual
Intensify	Auto / Off (selectable x2 - x512)
Motion Detection	On / Off (4 programmable zones)
Privacy Masking	On / Off (8 programmable zones)
Speco DNR	High / Med / Low / Off
Sharpness	On / Off (level adjustable)
Mirror	On / Off
Power Consumption	12VDC, 150mA / 24VAC, 2W
Power Supply	12VDC / 24VAC dual voltage operation (power supply not included)
Operating Temperature	14° F – 122° F
Storage Temperature	-4° F – 140° F
Dimensions	2.5" (W) x 2.2" (H) x 3.46" (L)
Weight	1.5 lbs.

Optional Accessories



PSW4
24VAC
Power Supply



PSW5
12VDC
Power Supply



VCH401HBMT
Housing with Heater,
Blower & Bracket



TVIUTPPT
HD Video
Transceiver with
Pigtail (Balun)



TVIUTP
HD Video
Transceiver

Optional Lenses

VFMP2.712DC6 ... 2.7-12mm megapixel varifocal lens