


## 8" 70/25V Ceiling Tile Speaker

**SPCT8T** White housing

### Features

- Easy select transformer dial
- 25V or 70V selector switch
- Fits directly into a 2'x2' ceiling tile grid
- Smooth vent facade design
- Includes 2" rail for mounting in a 2' x 4' ceiling grid
- Lifetime warranty

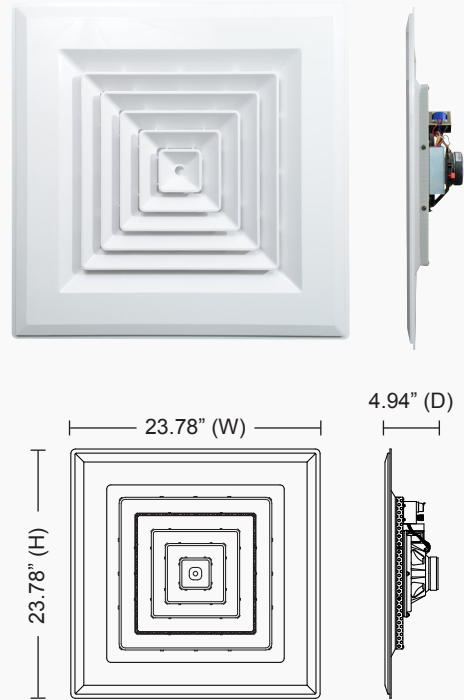

### Specifications

RMS Power .....	30W
Max. Power.....	60W
Transformer Type .....	70/25V (selectable)
Transformer Power Type .....	20W, 10W, 5W, 2.5W, 1.25W & 8 Ohms
Termination Type .....	Press terminal
Sensitivity (1W/1M).....	89dB
Maximum SPL (Pax/1M).....	97.1dB
Driver Impedance .....	8 Ohms
Magnet.....	10 oz. ferrite
Frequency Response Range .....	50Hz ~ 20kHz
Dispersion @ 1000Hz.....	160° Conical
Driver.....	8" polypropylene woofer, 0.75" Mylar tweeter
Speaker Dimensions.....	23.78" (W) x 23.78" (H) x 4.94" (D)
Mounting Dimensions .....	n/a
Minimum Mounting Depth.....	6.5" (Dia.)
Weight.....	7.26 lbs.
Material.....	Baffle: High impact polystyrene
Color.....	White