

Miscellaneous Speakers / Grilles & Wall Baffles

8" WALL BAFFLES WITH TRANSFORMER AND LEVEL CONTROL

- Deluxe sloped front walnut grained vinyl clad wall baffle
- Solid wood construction
- G8CF6W 8" 6 oz. dual cone speaker
- 70V line transformer, level control & built-in terminal strip for wattage selection up to 10W
- For 25V line, order WB8-6D-25
- Black cloth grille
- 10"H x 10"W - Top 5", bottom 3"D
- Sold individually



WB8-6D

10" BLACK POLY RESIN LAMINATED WOOFER CONE

- 1.5" high temperature aluminum voice coil
 - 60 oz magnet structure weight
 - 150W RMS/200W max
 - 8 Ohms impedance
 - Frequency response: 30 - 4.5kHz
 - Sensitivity (1W/1M): 95dB
- Sold individually



G1070PW

12" BLACK POLYRESIN LAMINATED CONE WOOFER

- 1.5" high temperature aluminum voice coil
- 75 oz magnet structure weight
- 190W RMS/250W max
- 8 Ohms impedance
- Freq. response: 25 - 4.5kHz
- Sensitivity (1W/1M): 96dB
- Sold individually



G1275PW

8" DUAL CONE SPEAKER

8" BLACK POLY RESIN LAMINATED WOOFER

- 1.5" high temperature aluminum voice coil
- 40 oz magnet structure weight
- 100W RMS/150W max
- 8 Ohms impedance
- Frequency response: 34 - 4.5kHz
- Sensitivity (1W/1M): 94 dB
- Sold individually



G850PW

12" STEEL CEILING GRILLE



- 8" grille with EZ mounting tabs for dry wall installations
- Sold in pairs

SP-8G

12" STEEL CEILING GRILLE



- Heavy duty white enamel 12" steel ceiling grille for 8" speakers with hardware
- (20/Master Carton)

G12WD

SOUND COLUMNS SUITABLE FOR INDOOR/OUTDOOR COMMERCIAL APPLICATIONS

- White weatherproof aluminum housings
- Sound pressure level: 94 dB (1W/M)

20W Version

- 20W RMS/40W maximum output
- Built-in transformer for 25V, 70V constant voltage
- Six position rotary dial to adjust sound power
- Five 2.5" speakers
- Tap settings: 20W, 10W, 5W, 2.5W
- 3"L x 4.125"W x 24.375"H
- Sold individually

40W Version

- 40W RMS/60W maximum output
- Tap settings: 20W, 40W
- Four 6.5" speakers
- 5"L x 9"W x 36"H
- Sold individually



20W **SC-20T**
40W **SC-40T**

8" Speaker Combos



WEATHERPROOF 8" COAXIAL 2 WAY POLYPROPYLENE SPEAKER

G810CPP

- 10 oz. ceramic Magnet
- Impedance - 8 Ohms, 1" VC
- 25 Watt max
- Freq response 50-15 kHz

8" COAXIAL 2 WAY SPEAKER

- 20 oz. ceramic magnet
- Impedance - 8 Ohms, 1" VC
- 40 Watt max
- Freq response 50-15 kHz

G8CA20CX



8" SPEAKERS WITH BUILT-IN LINE TRANSFORMER MOUNTED & WIRED



Model No.	Magnet Size	Transformer Type	Cone Type
G8CA10C/T7010	10 oz.	70V/10W line	Coaxial

Also available with 25V transformer, please specify • Sold Individually

8" DUAL CONE SPEAKER

- 10 oz. ceramic magnet
- 8 Ohms • 20 Watt max
- Freq. 85-15 kHz • Hole for transformer mounting
- Full range speaker suspension speaker
- Bulk packaged 18 pieces

G8CA10WX



WALL BAFFLES WITH SPEAKERS • WITH SPEAKER & TRANSFORMERS • EMPTY



- WB8-10F-70** 10 oz. dual cone speaker & 70V 10W transformer
- WB8** (Empty Wall Baffle Only, Vinyl Walnut Finish)

Sold Individually • All combos also available with 25V transformer, please specify.

10"H x 10"W - Top 5", Bottom 3"D

70/25V Ceiling Tile Speaker


Speco Technologies' new ceiling tile speaker is the perfect solution for commercial sound applications that require speed of installation, aesthetics and superior sound performance.

With the **SP-CT8/T**, installation is quick and easy requiring only the connecting of speaker wire to the unit's pushbutton terminals.

Countless time and money is saved by the efficient installation-friendly design of this speaker. We've eliminated the labor-intensive task of cutting mounting holes in ceiling tiles usually required for standard speaker installation.

The speaker's smooth vent facade design blends seamlessly with any commercial drop-ceiling environment and provides an ample gateway for wide sound dispersion. The visual design is matched by the high performance of the **SP-CT8/T's** flat frequency curve and wide response range.

Made of durable components and furnished complete with a support crossbar rail, the **SP-8CT/T** will provide years of superior sound performance.

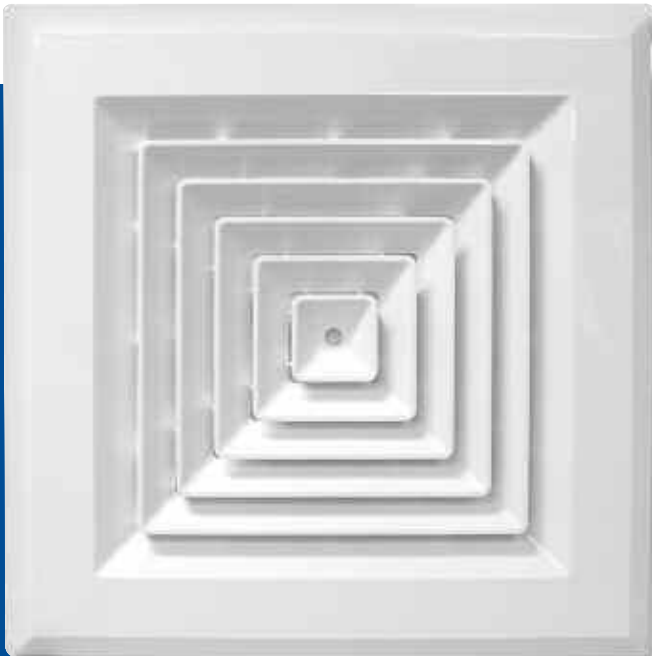

SP-CT8/T

SP-CT8/T 8" 70/25V Ceiling Tile Speaker

- 8" Polypropylene woofer with rubber surround
- 3/4" Mylar dome tweeter
- Frequency response: 50Hz-20kHz
- 30 Watts RMS/ 60 Watts Max
- Sensitivity: 90 +/- 3 dB
- 8 ohms
- 70/25 Volt selector switch
- Transformer Settings 20, 10, 5, 2.5, 1.25 and 8 ohms
- 23 3/4" W x 23 3/4" H x 6" D
- 7.1 lbs.
- 2' Drop-ceiling crossbar rail included



70/25V Mini Enclosed Indoor/Outdoor Speakers

Speco Technologies' SP-35X indoor and outdoor speakers are the perfect solution for where sound quality is demanded but space is limited.

The SP-35X's compact and stylish design adds to the décor of any environment, while their weatherproof design allows rich music to fill your environment indoors or out.

Whether using these speakers in a surround sound theater or an outdoor application, the SP-35X speakers will provide enjoyment for years to come.



SP-35X/T Black



SP-35X/T-W White

- 3.5" Mica Woofer with Rubber Surround
- .5" PEI Dome Tweeter
- Frequency Response: 90Hz-20kHz
- 30 Watts RMS/75 Watts Max
- 70 Volt Transformer
- Transformer Settings: 10W/ 5W/ 2.5W & 8 ohms
- Impedance: 8 ohms
- 5"W x 7.5"H x 6.5"D
- 3 lbs. each • Sold in Pairs

70 Volt Weatherproof Speakers with Transformers

ALL WEATHER DESIGN SPEAKERS with TRANSFORMER

Speco Technologies' AWD Speaker Series Offers The Best Specifications and Price Point For Mid-Range Outdoor Speakers



5.25"



6.5"

SP-5AWD/T-W (White)
SP-5AWD/T (Black)

Description	5.25" Outdoor Speakers w/transformer
Woofer	5.25" Polypropylene-Coated with Rubber Surround
Tweeter	1/2" PEI Tweeter
Frequency	60Hz-20kHz
Sensitivity	88 dB 1 w/1m
Wattage	40 Watt RMS/80 Watt Max
Dimensions	8 3/4"H x 7"W x 5 3/8"D
Weight	5.3 lbs.
Impedance	8 Ohms
Transformer	70V/25V (30W/15W/ 7.5W/ 3.75W)

SP-6AWD/T-W (White)
SP-6AWD/T (Black)

Description	6.5" Outdoor Speakers w/transformer
Woofer	6.5" Mica with Rubber Surround
Tweeter	1" Mylar Tweeter
Frequency	54Hz-20kHz
Sensitivity	89dB 1w/1m
Wattage	50 Watt RMS/100 Watt Max
Dimensions	10 7/8"H x 8 3/4"W x 6 3/4"D
Weight	6.6 lbs.
Impedance	8 Ohms
Transformer	70V/25V (30W/15W/ 7.5W/ 3.75W)

TWO-WAY WEATHER RESISTANT INDOOR/OUTDOOR DELUXE PROFESSIONAL SPEAKER SYSTEM WITH 70V LINE TRANSFORMER WATTAGE TAPS 20, 10, 5, 2.5W & 8 OHMS

- 50W RMS per channel • 80W max per channel • 8 Ohms • Frequency response: 50 - 20 kHz
- Woofer 5 1/4" • Polycarbon 1" voice coil, 20 oz. magnet • Mylar tweeter
- 1 1/4" voice coil, 10 oz. 2 1/2" magnet • Sealed die cast aluminum housing
- Quick connect terminals • 6.5"L x 6.25"W x 9"H • 10 lbs., 4 oz. • Sold individually



Black **SP-150T**
White **SP-150TW**

WEATHER RESISTANT INDOOR/OUTDOOR THREE-WAY POLYPROPYLENE CONE SPEAKER SYSTEM WITH DUAL BUILT-IN LINE TRANSFORMER

- All speakers are polypropylene • 70/25V line or 8 Ohms adjustable rotary switch
- 15W/330 ohms, 7.5W/660-Ohms, 4W/1250-Ohms, 2W/2500-Ohms, 1W/5000-Ohms
- Voice coil - 50W, 8 Ohms • Each speaker contains: 4" 10 oz. air suspension woofer, P.P. 2" midrange, 1" dome tweeter • Frequency response: 55-20 kHz • Die cast enclosure
- Complete with mounting bracket, wire & hardware • 4.375"L x 4.5"W x 7.25"H • Sold individually



Black **DMS-3TS**
White **DMS-3TSW**

Wireless Microphones

UHF 128 Frequency-Selectable, PLL Microphone Line

Speco Technologies' UHF 128 Frequency-Selectable Microphone Line consists of handheld, lapel microphone transmitters, and single or dual channel receivers. They allow the user to select and match a desired frequency on both the transmitter and receiver units. This feature also eliminates the need to maintain high inventory levels of similar units with locked frequencies. More choices of clear interference-free channels is the result.

Complete with LCD programmable displays and pushbutton select controls, this state-of-the-art UHF microphone system will provide crystal clear sound for roaming distances in excess of 300 feet. Speco Technologies new UHF Microphone System continues our heritage of producing products with attractive price points, feature-rich specifications and the quality of performance that our customers have come to expect.

Microphones

PROFESSIONAL UHF FREQUENCY-SELECTABLE PLL LAPEL MICROPHONE

- FCC Compliant • 128 Frequency-selectable for interference free usage
- Frequency Range: 740-752MHz • Uni-directional, electret condenser lapel microphone
- Mini XLR connection to lapel microphone cord • Belt clip for fastening
- LCD display with channel and battery life readings • Gain control dial
- Ability to be recharged with MWR-100/200UHF receivers • Dimensions: 2.5" W x 4" H x 1" D

Specifications

Power Output 10mW (max.)
 Oscillator PLL synthesized
 Frequency Stability ±0.005%
 Maximum Deviation ±48KHz with limiting compressor
 Spurious Emission >60dB below carrier frequency

T.H.D. <1.0% (at 1KHz)
 Power Supply DC1.5V x 2AA rechargeable or dry batteries
 Tone Key 32.768KHz
 Mic Unit Uni-directional electret condenser unit
 Current Consumption .. 115mA ± 10mA



MWLP-UHF

PROFESSIONAL UHF FREQUENCY-SELECTABLE PLL HANDHELD MICROPHONE

- FCC Compliant • 128 Frequency-selectable for interference-free usage
- Frequency Range: 740-752MHz • Uni-directional, electret condenser handheld microphone
- LCD display with channel and battery life readings
- Ability to be recharge with MWR-100/200UHF receivers • Dimensions: 2.5" W x 11" H

Specifications

Power Output. 10mW (max.)
 Oscillator. PLL synthesized
 Frequency Stability ±0.005%
 Maximum Deviation ±48KHz with limiting compressor
 Spurious Emission >60dB below carrier frequency

T.H.D. <1.0% (at 1KHz)
 Power Supply DC1.5V x 2AA rechargeable or dry batteries
 Tone Key 32.768KHz
 Mic Unit. Uni-directional electret condenser unit
 Current Consumption 115mA ± 10mA



MWHH-UHF

PROFESSIONAL LIGHTWEIGHT CONDENSER HEADSET MICROPHONE

- Cardioid, electret condenser microphone • Uni-directional
- Sensitivity -67+/- 4dB (0dB=1V/ μbar, 1kHz)
- Impedance: 600 ohms • Frequency range: 100-16,000Hz
- Max. operation voltage: 10V DC • Standard operation voltage: 1.5V DC
- Current consumption: Max. 0.5mA • Sensitivity reduction: Within -3dB at 1V
- S/N Ratio: > 40dB • Weight: 2 oz. • Cord Length: 3 ft. • Wind Screen Included

MW-HSLC



Receivers and wireless mic transmitters must be ordered separately

Wireless Microphones

Microphones



PROFESSIONAL UHF SINGLE CHANNEL, DIVERSITY PLL RECEIVER FOR USE WITH MWHH-UHF & MWLP-UHF

- FCC Compliant
- 128 Frequency-selectable for interference-free usage
- Frequency Range: 740-752MHz
- LCD display with channel, frequency and volume readings
- RF and AF meter indicators on front panel
- Squelch adjustment control
- Ability to recharge MWHH-UHF/MWLP-UHF microphones from receiver
- Balanced XLR and unbalanced outputs
- Connecting cable with XLR – XLR connectors included
- Removable TCN-type coaxial cable antennas
- Mounting brackets included

MWR-100UHF

Specifications

Frequency Range	UHF 740-752MHz	Dynamic Range	> 96dB
Oscillator	PLL synthesized	Tone Signal	32.768KHz
Receiving Mode	Single channel, diversity	S/N Ratio	> 94dB, at 48KHz deviation & 60dBuV antenna input
Frequency Stability	±0.005%	AF Response	50Hz to 15KHz (±3dB)
Receiving Sensitivity	At 8dBuV over 80dB S/N ratio	Power Supply	12 VDC
Image & Spurious Rej.	80dB minimum	T.H.D.	< 1% (at 1 KHz)
Selectivity	> 50dB	LCD Display	Channel, frequency and volume level
Modulation Mode	FM	Current Consumption	500mA ± 10mA
IF Frequency	1st: 56MHz, 2nd: 10.7MHz	Dimensions	8.5" W x 1.75" H x 6.5" D



PROFESSIONAL UHF DUAL CHANNEL, DIVERSITY PLL RECEIVER FOR USE WITH MWHH-UHF & MWLP-UHF

- FCC Compliant
- 128 Frequency-selectable for interference-free usage on both channels
- Frequency Range: 740-752MHz
- LCD display with channel, RF and AF readings
- Dual channel volume controls on front
- Squelch adjustment controls for each channel
- Ability to recharge MWHH-UHF/MWLP-UHF microphones from receiver
- Balanced XLR and unbalanced outputs
- Connecting Cable w/ XLR Connections included
- Mounting brackets included

MWR-200UHF

Specifications

Frequency Range	UHF 740-752MHz	Dynamic Range	> 96dB
Oscillator	PLL synthesized	Tone Signal	32.768KHz
Receiving Mode	Dual channel, diversity	S/N Ratio	> 94dB, at 48KHz deviation & 60dBuV antenna input
Frequency Stability	±0.005%	AF Response	50Hz to 15KHz (±3dB)
Receiving Sensitivity	At 8dBuV over 80dB S/N ratio	Power Supply	12 VDC
Image & Spurious Rej.	80dB minimum	T.H.D.	< 1% (at 1 KHz)
Selectivity	> 50dB	LCD Display	Channel, frequency and volume level
Modulation Mode	FM	Current Consumption	500mA ± 10mA
IF Frequency	1st: 56MHz, 2nd: 10.7MHz	Dimensions	16.5" W x 2" H x 7" D

Receivers and wireless mic transmitters must be ordered separately

Wired Microphones

Microphones

HANDHELD DYNAMIC MICROPHONE

- Dynamic
- Uni-Directional
- 50Hz-16kHz
- 700-Ohms impedance
- Sensitivity: -54dB±3dB
- 3 Pin XLR Male Connector
- On/Off Switch
- 20 ft., XLR MIC Cable Included
- Carrying Case



MCHH-100

PERFORMANCE HANDHELD DYNAMIC MICROPHONE

- Dynamic
- Uni-Directional
- Zinc-die Casting Housing
- Weather-Resistant Cartridge for Outdoor Use
- 40Hz-16kHz
- 600-Ohms impedance
- Sensitivity: -52dB±3dB
- 3 Pin XLR Male Connector
- On/Off Switch
- 20 ft., XLR MIC Cable Included
- Carrying Case



MCHH-200

PROFESSIONAL CONDENSER MICROPHONE


- Back Electret Condenser
- Uni-directional
- Zinc-die Casting Housing
- Ideal for Clear Reproduction of Natural Sound
- 50Hz-18kHz
- 600-Ohms impedance
- Sensitivity: -45dB±3dB
- Max. Input SPL: 130dB (at 1kHz ≥1% T.H.D)
- S/N Ratio: ≥70dB
- Phantom Power Requirement: 9V-52V DC phantom or 1.5V Battery



MCHH-300

TABLETOP CONFERENCE MICROPHONE

- Back Electret Condenser
- Uni-directional
- Flexible Gooseneck
- Easy Touch On/Off Button
- Blue LED On/Off Indicator
- 100Hz-16kHz
- 500-Ohms impedance
- Sensitivity: -38dB±3dB
- XLR 3 Pin Male Connector
- Two AA Batteries Included
- 20 ft., XLR MIC Cable Included
- Windscreen Sponge over MIC



MCDT-200

PROFESSIONAL TABLETOP CONFERENCE MICROPHONE

- Back Electret Condenser
- Uni-directional
- Flexible Gooseneck
- Easy Touch On/Off Button
- Blue LED On/Off Indicator
- 50Hz-16kHz
- 500-Ohms impedance
- Sensitivity: -37dB±3dB
- XLR 3 Pin Male Connector
- Two AA Batteries Included
- 20 ft., XLR MIC Cable Included
- 9V-52V DC Phantom or 1.5V Battery
- Windscreen Sponge over MIC



MCDT-300

INDUSTRIAL GOOSENECK MICROPHONE

- Dynamic
- Uni-directional
- On/Off Switch on MIC Head
- Flexible Gooseneck
- 80Hz-16kHz
- 500-Ohms impedance
- Sensitivity: -54dB±3dB
- XLR 3 Pin Male Connector



MCGN-100

PROFESSIONAL GOOSENECK MICROPHONE

- Back Electret Condenser
- Uni-directional
- Blue LED On/Off Indicator
- Flexible Gooseneck
- Windscreen Sponge over MIC
- 50Hz-16kHz
- 1000-Ohms impedance
- Sensitivity: -45dB±3dB
- Three Wire Connection
- 9V-52V DC Phantom Power Required



MCGN-300

PROFESSIONAL HANGING MICROPHONE

- Back Electret Condenser
- Uni-directional
- Spring Neck Included
- 50Hz-16kHz
- 250-Ohms impedance
- Sensitivity: -37dB±3dB
- XLR 3 Pin Male Connector
- 9V-52V DC Phantom Power Required
- 20 ft. cable included



MCHM-300

PROFESSIONAL BOUNDARY MICROPHONE

- Back Electret Condenser
- Uni-directional
- Stealth Design
- 20 feet, XLR Cable Included
- 60Hz-16kHz
- 250-Ohms impedance
- Sensitivity: -36dB±3dB
- 9V-52V DC Phantom Power Required
- Mute Feature



MCBM-300



PHANTOM POWER ADAPTERS FOR CONDENSER MICROPHONES


- 48V DC phantom power supply is designed for condenser microphones.
- Male XLR mic output connector
 - Female XLR mic input connector
 - 110/0V 60/50Hz
 - 5ft. AC power cord included

MCPP-100

Microphones & Accessories

Microphones

GOOSENECK ADJUSTABLE TABLETOP MIC



- Momentary switch for priority paging, & lock down switch for continuous use
- 6" gooseneck extension and 5' cord
- Cannon 3 pin XLR male connector
- Impedance: low-600-Ohms high-50 kHz
- Sensitivity: High-53dB +/- 3dB Low 71 dB +/- 3 dB

MHL-5S

DYNAMIC GOOSENECK MIC WITH PUSH TO TALK SWITCH



MGS-1

- Unidirectional
- 16 1/4" gooseneck
- 500-Ohms low impedance
- Mounting base

UNIDIRECTIONAL DYNAMIC MICROPHONE



MHL-1

- Dual impedance: high 50K-Ohms, low 600-Ohms
- Impedance select switch
- With stand adapter, 1/4" phone plug, 15' cable and attractive Tri-pod desk stand

PUSH TO TALK HANDHELD MIC



- 5 wire
- 500-Ohms impedance
- For CB & professional communications
- Push to talk
- Unbalanced (TS) plug

DM-520
1/4" phono plug DM-520P

Microphone Accessories

ROUND BASE MIC STAND



- 2 Sections 5' Max
- Cast iron base with chrome plated steel tube

MSR-5

5" MIC DESK STAND WITH CAST IRON BASE



- 2 Sections 5' Max
- Cast iron base with chrome plated steel tube

MSD-5

CANNON CONNECTOR 3 PIN MALE



MPC-2

CANNON CONNECTOR 3 PIN FEMALE



MPC-3

10 AMP EXTRA HEAVY DUTY HOT LINE FILTER



HLF-10

FEMALE FLANGE ADAPTER



- 1-3/4" base dia. **MAD-11F**
- 5/8" female threaded for gooseneck mounting

MALE FLANGE ADAPTER



- 1-3/4" base dia. **MAD-12M**
- 5/8" male threaded for gooseneck mounting

MIC ADAPTER



- Fits most hand held microphones

MSA-2

MIC STAND DESKTOP TRIPOD



- 5" High tripod with microphone adapter **MST-1**

UNIVERSAL MIC STAND ADAPTER



- Fits most hand held microphones
- Clamp on style for wider hand held microphones

MSA-1

3', 10', 15', 20' HIGH PERFORMANCE MIC CABLES

- Low Impedance MIC Cable
- XLR (Cannon) Connectors
- Lead and Cadmium free insulation, exceeds all government standards.
- Lifetime warranty

MCA-10, MCA-20



DYNAMIC BOOM MICROPHONE WITH HEADPHONE

- Adjustable headband boom microphone
- Use with camcorder, VCR, etc.
- 250-Ohms, 200 - 4 kHz
- 5' cord with 3.5mm mini plug for microphone and 3.5mm mini plug for headphone
- Balanced (TRS) plug

MBM-3



Transformers & Accessories

70V - 20W LINE TRANSFORMER

- Multiple wattage taps-20W, 15W, 10W & 5W
- EZ mount peel - stick & connect to existing 8 Ohms speakers
- Sold individually



T-20

STEREO MONO MIXER

- Combines left & right stereo inputs to provide a single output for applications calling for one speaker
- Peel, stick & connect for easy installation • 30W RMS



TSM-30

25 & 70 VOLT TRANSFORMERS



- Dual 5W multiple tap 5, 2 1/2, 1, 1/2, 1/4
- Sold individually

25 V Line **T-2510** 70 V Line **T-7010**

5W LINE TRANSFORMER WITH COLOR CODED LEADS



- Taps .25, .50, 1.0, 2.5, 5.0
- Sold individually

T-7025/5

70V SPEAKER LINE TRANSFORMER



- HI-FI applications
- 70V, 20W
- Sold individually

Taps 20, 15,10,5 **T-7020**

3 POSITION STEREO SELECTOR SWITCH



- Three position allows you to put 3 stereo sources in 1 stereo input
- Sold individually

SSS-1

TELEPHONE LINE INPUT MATCHING TRANSFORMER

- Input matching transformer to connect telephone systems to aux. input of Public Address amplifiers for telephone paging
- Also allows you to put a "Music on Hold System" to your telephone system when connected to the 25 volt line output of a PA amplifier/tuner/tape
- Impedance Ohms: 500/600 (line) • Sold individually



TLT-1

Mini Speakers

1" TO 5" MINI SPEAKERS Available in bulk only - 50 piece standard bulk pack Qty.

MODEL NO.	DIA INCH	IMP OHMS	RESONANT FREQ (Hz)	FREQUENCY RANGE (Hz)	SENSIT dB	POWER NOM WATTS	ALINCO MAG WHT OZ.
U260X	2" RD	8	375-485	FO-4,500	92.0	0.2	0.33
U260SX	2" SQ	8	375-485	FO-4,500	92.0	0.2	0.33
U208X	2 3/4"RD	8	260-340	FO-4,000	95.0	0,3	0.42
R305X	3 1/2"RD	8	210-260	FO-5,000	94.5	0.5	0.42
G4CA10X	4" Pin Cushion	8	430-530	FO-5,000	89	.15	10 *
G23AF.5X	2" x 3"SQ	8	430-530	FO-5,000	89	.15	.57
A5CF3X	5" Pin Cushion	8	430-530	FO-5,000	89	.15	3 *
SQ-SQUARE	RD-ROUND	*CERAMIC MAGNET					

ECONOMICAL COMMUNICATION EXTENSION SPEAKER



- Compact size
- Mounting bracket with hardware
- 10 foot cable with 3.5mm mini plug
- 2.7"L x 4.5"W x 4.5"H • 4" • 8 Ohms
- 5 Watt

CBS-200

Mini Speakers

PROFESSIONAL COMMUNICATION SPEAKER PERFECT FOR CELL PHONES



- Includes bracket with magnet
- 7' cord with mini plug • 8 Ohms
- 5 Watt • 1.25"L x 3"W 2.75"H

CBS-100

10W AMPLIFIED DELUXE PROFESSIONAL COMMUNICATIONS EXTENSION SPEAKER

- Swivel bracket for all angles
- ABS plastic enclosure
- Voltage 12V DC Input
- Impedance 4-8 Ohms
- 10W amplified power
- 4" - 10W speaker and soft padded grille
- Complete with 10 ft. cord & standard 3.5mm mini plug
- 2.5"L x 5.5"W x 4.5"H



AES-4

DELUXE PROFESSIONAL COMMUNICATIONS EXTENSION SPEAKER

- Swivel bracket for all angles
- ABS plastic enclosure
- Soft padded grille
- Complete with 10 ft. cord with standard 3.5mm mini plug
- Controlled speech frequency response (700 - 2 kHz) automatically limits background noise
- 4 - 8 Ohms, 10W speaker
- Size 4.5"H x 5.5"W x 2.5"D



CBS4



ALL WEATHER PROFESSIONAL COMMUNICATIONS EXTENSION SPEAKER

- 5 Watt • Speaker 4" polypropylene • Max. power 5W • Impedance 8 Ohms
- Weatherproof professional marine communications extension speaker with polypropylene cone
- ABS plastic case w/stainless steel hardware and 180° deluxe adjustable mounting bracket
- Prewired 10 ft. cable and 3.5mm miniature plug

White **CBS-240W** Black **CBS-240**

Weatherproof Paging Horn Speakers

1 Available in 4 Ohm, 8 Ohm or with 70V Transformer

2 Typical frequency response from 150, 200 or 300 Hz to 15kHz

3 Available from 15-75 Watts max.

4 Made from Aluminum or ABS plastic

5 2 Year Warranty from date of purchase

6 Weatherproof Construction

PA Horn Speakers



NOTE: SPC-40RT shown, but features are indicative of entire line

Weatherproof 8-Ohm PA Horn Speakers

WEATHERPROOF 6" ALUMINUM PA SPEAKER

Freq resp250 - 15 kHz
 Power rating10W nom/15W max
 Sensitivity105 dB/1W/1M
 Impedance 8 Ohms
 Size 6"Dia x 6"L

8 Ohms **SPC-10**
 4 Ohms **SPC-10/4**



WEATHERPROOF 5" x 8" ALUMINUM PA SPEAKER

Freq resp200 - 15 kHz
 Power rating ...15W nom/25W max
 Sensitivity110 dB/1W/1M
 Impedance 8 Ohms
 Size 8"L x 8"W x 5"H



SPC-15R

WEATHERPROOF 8" ALUMINUM PA SPEAKER

Freq resp200 - 15 kHz
 Power rating15W nom/25W max
 Sensitivity110 dB/1W/1M
 Impedance 8 Ohms
 Size 8"Dia x 8"L



SPC-15

WEATHERPROOF 5" WHITE ABS PA SPEAKER

Stainless Steel Hardware & ABS Plastic Base with 10 Ft. Cord & 3.5 mm Plug

Freq Resp 300-15 kHz
 Power Rating15W max
 Sensitivity 105dB/1W/1M
 Impedance 8 Ohms
 Size 5"Dia x 5"L



8 Ohms **SPC-5P**
 4 Ohms **SPC-5P/4**

6 1/2" x 11" WHITE ABS PA SPEAKER WEATHERPROOF

Freq resp200 - 15 kHz
 Power rating ...40W max
 Sensitivity120 dB/1W/1M
 Impedance 8 Ohms
 Size 9"L x 6.5"W x 11"H



8 Ohms **SPC-40RP** 4 Ohms **SPC-40RP/4**

Weatherproof 8-Ohm PA Horn Speakers

WEATHERPROOF 5" ALUMINUM PA SPEAKER

Freq Resp 300-15 kHz
 Power Rating 15W max
 Sensitivity 105dB/1W/1M
 Impedance 8 Ohms
 Size 5"Dia x 5"L



SPC-6P

WEATHERPROOF 5" WHITE ABS PA SPEAKER WITH METAL BASE

Freq Resp 300-15 kHz
 Power Rating 15W max
 Sensitivity 105dB/1W/1M
 Impedance 8 Ohms
 Size 5"Dia x 5"L



SPC-8

4" x 6" WHITE ABS PA SPEAKER WEATHERPROOF

Freq resp 200 - 15 kHz
 Power rating ... 15W nom/30W max
 Sensitivity 110 dB/1W/1M
 Impedance 8 Ohm



SPC-12RP

8" x 12" ALUMINUM PA SPEAKER WEATHERPROOF

Freq resp 150 - 15 kHz
 Power rating 30W nom/65W max
 Sensitivity 110 dB/1W/1M
 Impedance 8 Ohm
 Size 12"Dia x 12"L



SPC-20R

WEATHERPROOF 12" ALUMINUM PA SPEAKER

Freq resp 150 - 15 kHz
 Power rating 30W nom/65W max
 Sensitivity 110 dB/1W/1M
 Impedance 8 Ohms
 Size 12"Dia x 12"L



SPC-20

WEATHERPROOF 15" ALUMINUM PA SPEAKER

Freq resp 130 - 15 kHz
 Power rating 40W nom/75W max
 Sensitivity 120 dB/1W/1M
 Impedance 8 Ohms
 Size 15"Dia x 13"L



SPC-30

70/25 Volt Commercial PA Horn Speakers

WEATHERPROOF PA SPEAKER 70/25V LINE TRANSFORMER

Freq Resp250-15 kHz
 Power15W nom/30W max
 Taps 25V line15W/42-Ohms, 10W/63-Ohms,
 3.7W/170-Ohms, 10W/500-Ohms,
 5W/1k-Ohms, 3W/1.3k-Ohms,
 1W/2.3k-Ohms
 Sensitivity120dB/4V/1M
 Impedance333-Ohms
 Size8.5"Dia x 9"L



SPC-15T

WEATHERPROOF PA SPEAKER 70/25V LINE TRANS. BUILT-IN

Freq Resp250-16 kHz
 Transformer Taps30W, 15W, 10W, 5W, 3W, 1W
 Power30W
 Sensitivity120dB/4V/1M
 Impedance8 Ohms swivel bracket
 Size10.25" L x 11"W x 8"H



SPC-30RT

6.25" x 11" ABS SPEAKER WITH 70/25V LINE TRANSFORMER

Freq Resp..... 250-15 kHz Power 32W max
 Transformer Taps 32W/330 Ohms • 16W/300 Ohms
 8W/600 Ohms • 5W/1250 Ohms
 2W/2.5K Ohms
 Sensitivity 120dB/4V/1M
 Impedance..... 8 Ohms
 Size 13"L x 6.5"W x 11"H



SPC-40RT

Create the perfect projection horn for your application by pairing our casings with our universal drivers!

Projection Horn Casings & Drivers

PA Housings

20" ALUMINUM WEATHERPROOF PROJECTOR HORN FOR USE WITH SRD DRIVERS

Size20"Dia x 20.25"L
 Dispersion80°
 Low end cutoff ...250 Hz



SRH-20

16" ALUMINUM WEATHERPROOF PROJECTOR HORN FOR USE WITH SRD DRIVERS

Size 16"Dia x 13.5"L
 Dispersion90°
 Low end cutoff ...250 Hz



SRH-16

15" x 9" ALUMINUM WEATHERPROOF PROJECTOR HORN FOR USE WITH SRD DRIVERS

Size15" x 9" x 12.75"L
 Dispersion120° x 60°
 Low end cutoff ...250 Hz



SRH-159R

35 WATT RMS UNIVERSAL DRIVER WITH BUILT-IN 70 VOLT LINE TRANSFORMER

Freq Resp250-6 kHz
 Transformer taps35, 25, 15, 10,
 Power rating35 W RMS, 45 W Max
 Sensitivity106 dB
 Throat diameter1.375 x 18 TPI

Replacement voice coils available



SRD-35T

50 WATT RMS UNIVERSAL DRIVER

Freq Resp 250-6 kHz
 Impedance 16 Ohms
 Power rating50W RMS/65W Max
 Sensitivity 110 dB
 Throat diameter1.4 x 18 TPI

Replacement voice coils available



SRD-50

75 WATT RMS UNIVERSAL DRIVER

Freq Resp250-8 kHz
 Impedance 16 Ohms
 Power rating75 W RMS, 90 W Max
 Sensitivity 110 dB
 Throat diameter1.3 x 18 TPI

Replacement voice coils available



SRD-75

80 W RMS UNIVERSAL DRIVER WITH BUILT-IN 70 VOLT LINE TRANSFORMER

Freq Resp 300-5 kHz
 Taps 80, 40, 20, 10, 5
 Power Rating80 W RMS/100 W Max
 Sensitivity112 dB
 Throat diameter1.375 x 18 TPI

Replacement voice coils available



SRD-80T

100 W RMS UNIVERSAL DRIVER

Freq Resp250-8 kHz
 Impedance16 Ohms
 Power rating100 W RMS,120 W Max
 Sensitivity113 dB
 Throat diameter1.3 x 18 TPI

Replacement voice coils available



SRD-100

PA Drivers