




AMP310VS Stereo Power Amplifier

Features:

- MAIN / INTERRUPT priority input switching
- MAIN auxiliary output
- Speaker A/B switching
- Signal sensing "Power On" and Trigger mode
- Rear mounted treble and bass controls
- High level input

Features (Continued)

- Front panel balance and volume trim controls
- Independent rear left / right master level controls
- Front panel diagnostic LEDs
- Triple-Darlington Power Amplifier Stages
- Dual-differential error amplifiers
- Rack Mountable (Rack Mount Included)
- Front Panel Clip/Diagnostic LEDs

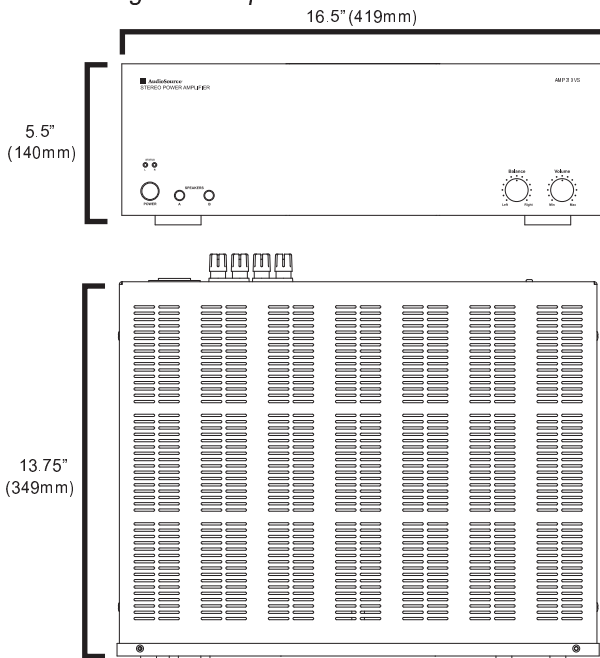

Specifications:

Stereo (8 ohm):	150W per channel, <0.2% THD+N
Stereo (4 ohm):	225W per channel, <0.2% THD+N
Bridged Mono (8 ohm):	450W, 1kHz, <0.2% THD+N
Frequency Response:	10Hz ~ 50kHz, +0dB/ -3dB
Signal to Noise Ratio:	100dB below 150W output into 8 ohms
Channel Separation:	70dB
Input Sensitivity:	Variable, 350mV to 2.8V for rated power into 8 ohms
Bass/Treble Control:	+/- 12dB @ 100Hz and 10kHz
AC Power Consumption:	1200W maximum
Net Weight:	33.1lbs / 15.0kgs
Gross Weight:	39.6lbs / 18.0kgs

AMP310VS
AudioSource 2 x 150 Watt Stereo Amplifier



MSRP : \$799.99 MAP : \$659.99 UPC: 041087906717 MP: 1
Shipping Carton Weight / Dimensions lbs-in: 39.6lbs - 21.2" x 18" x 9.7" kg-mm: 18 - 538 x 457 x 246

www.audiosource.net
13970 SW 72nd Ave Portland
OR 97223 Tel: 503.914.4688