

Vi22001

MaxiiPower™ Single Port 90W PoE++ Midspan

Features

- Single port 90W midspan for 10/100/1000Base-T networks
- Compliant with 802.3af/at and 802.3bt PoE standards
- Delivers up to 90W PoE power for high power applications such as PTZ domes and high PoE cameras
- Complies with 802.3 safety standards for automatic detection and over-current protection
- Built-in PoE surge protection
- Ideal for powering high data rate and high power for Megapixel IP camera applications
- Cold Start: -20°C
- Operates at extended temperature range -40°C to +60°C
- Tested to RFC 2544 packet transmission standards
- Compact design
- Limited lifetime warranty



Applications

- Local PoE source for IP cameras
- Cost effective solution for applications using non-PoE network switch
- Powering all types of PoE powered IP equipment
- Complies to know standards for 802.3bt for LED Lighting and high power applications
- Powers PTZ domes requiring 60W and PoE Lighting conforming to 802.3bt

The MaxiiPower Model Vi22001 is a unique Single port PoE Midspan designed for the most demanding power applications of 10/100/1000 Base-T networks. With the ability to provide up to 90W PoE power, it is the most cost effective method for powering PTZ domes cameras with heaters and blowers. The Midspan is compliant IEEE 802.3af, IEEE 802.3at, and proposed IEEE 802.3bt standards up to 90W PoE applications.

The Vi22001 can virtually meet requirements of any high power PoE application. Its unique internal control system enables it to handle both single PD and dual PD PoE devices.

The Midspan is equipped with LEDs to provide power status. No IP setting or configurations are required and it can be completely transparent to the Ethernet network and higher layer protocols.

The Vi22001's wide operating temperature and its compact size makes it an ideal Midspan to be used in most environmental enclosures.

Technical Specification*

Electrical

| | |
|--------------------|--|
| Ethernet Interface | Standard 10/100/1000 BaseTX |
| UTP | Category-5 (or higher) |
| AC Input Power | 90-264VAC @ 1.1A Max, 50-60 Hz |
| Output Power | 90W @ 56 VDC |
| PoE Standards | 802.3af 802.3at UPoE up to 90W |
| Status LEDs | Power: Green PoE On: Green |
| Connectors | Input Interface: Shielded RJ-45 Output Interface: Shielded RJ-45 Main Power: IEC 320-C14 inlet |

Regulatory

| | |
|---------------|------------|
| Safety | CE |
| Environmental | RoHS, WEEE |

Environmental

| | |
|-------------|---|
| Humidity | 0 to 90%, non-condensing |
| Temperature | Cold Start: -20°C Operating: -40°C to +60°C Storage: -40°C to +85°C |

Mechanical

| | |
|------------|----------------------------------|
| Dimensions | 2x3.75x5.71 in., 5.1x9.5x15.5 cm |
| Weight | (HxWxL) 1.58 lb (720 g) |
| Material | Extruded Aluminum |

Included Accessories

- Molded IEC 7 ft. (200 cm) power cord
- Mounting clips


*Specifications subject to change without notice.

Ordering Information



Part No. Description

| | |
|----------------|-------------------------------|
| Vi22001 | Single Port 90W PoE++ Midspan |
|----------------|-------------------------------|


PoE Power Output vs. Temperature

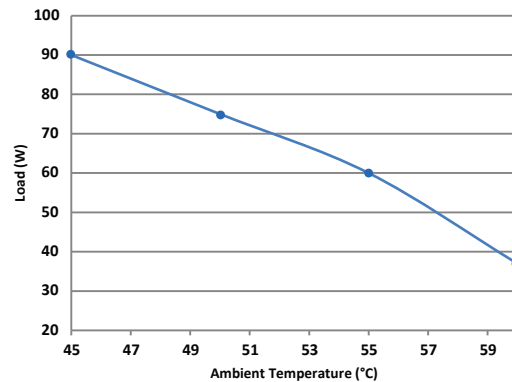

PoE Power at the load vs. Distance

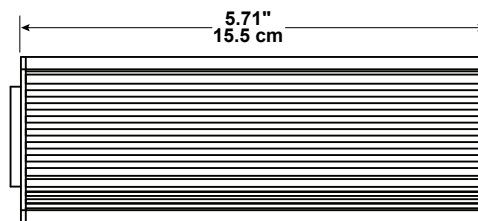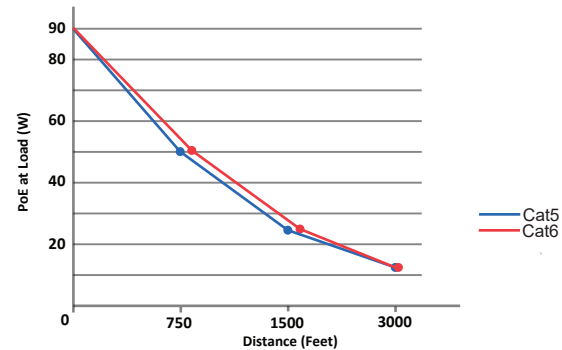

Side View

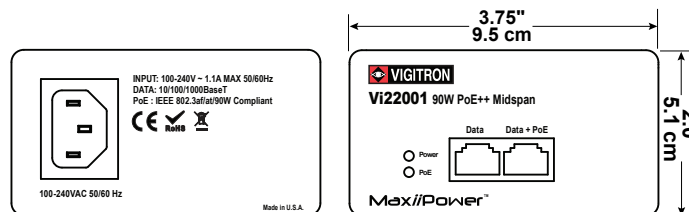

Right View


Left View




TEL (+1) 858 - 484 - 5209 • FAX (+1) 858 - 484 - 1205
7810 Trade Street, Suite 100, San Diego, CA 92121, USA • support@vigatron.com • www.vigatron.com

© Copyright 2019 Vigatron, Inc.

Application Diagrams

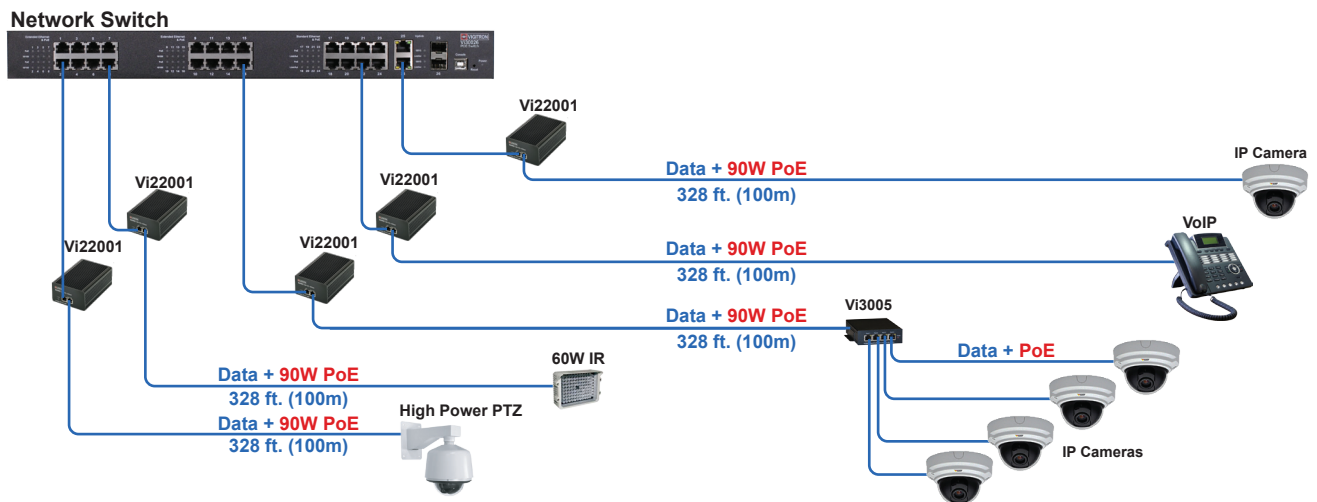

The Vi22001 can be used to power a wide variety of high PoE power devices with Single or Dual PDs.

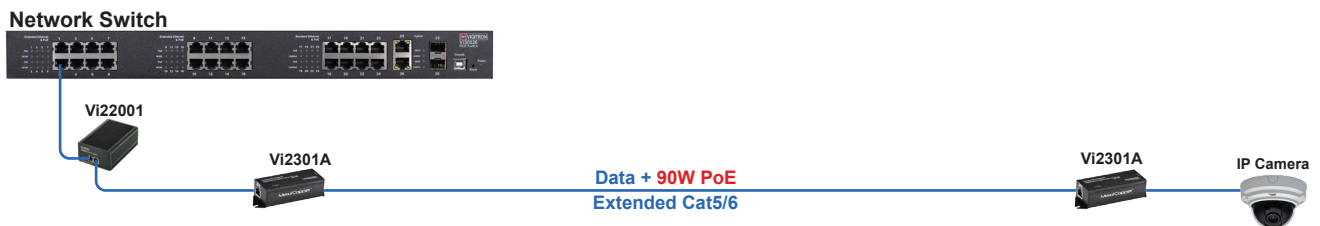

The Vi22001 can be used along with extenders to power PoE powered devices at long distances. The following chart shows how much power can be available at extended distances: