



SAFEPATH Batteries and Battery Kits



BAT-1212

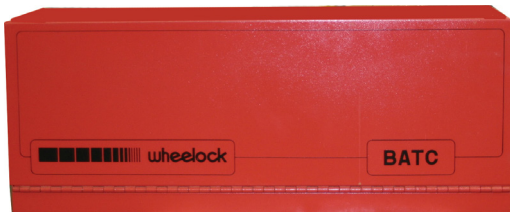

BATC

Description

The Wheelock BAT-(#) sealed lead acid batteries are leak-proof and maintenance free. They are based on a unique efficient oxygen recombination technology. Oxygen evolves from the positive plates and diffuses through the microporous glass fibers to the negative plates where it is changed back to water by recombination reaction. This process eliminates the need for water replacement.

All battery models are designed per NFPA 72 for use with engine driven generators, local central station or proprietary systems and auxiliary or remote station systems.

The BACT enclosure is constructed of steel and its door hinges fold downward for easy loading of the batteries. It also comes with a lockable door that is keyed like the SAFEPATH® control panel.

The BATC will hold four BAT-1212 batteries, two BAT-1224 batteries and one BAT-1265 battery.



Powering Business Worldwide

Table 1. Product features

Environment	
Operating Temperature:	-40°C to +60°C (-40 °F to 140°F)
Storage Temperature:	-20°C to +50°C (-4°F to 122°F)
Physical (Enclosure)	
Dimensions	BATC: 9.5" H (24.3 cm) x 24" W (60.96 cm) x 9" D (22.86 cm); BAT-1212: 4"H (10.16 cm) x 6" W (615.24 cm) x 4" D (10.16 cm); BAT-1224: 5"H (12.7cm) x 7" W (17.78 cm) x 7" D (17.78 cm); BAT-1265: 7"H (17.78 cm) x 4" W (35.56 cm) x 7" D (17.78 cm)
Weight	20 lbs (9.5 kg) Empty ,Lock Keyed like the SAFEPATH control panel
Finish	Red powder coat

Table 2. Order Information

Model Number	Order code	Description
BATC-R	5414	Battery Cabinet, Red
BAT-1212	7390	12 Volt ,12 Ampere Battery Cell
BAT-1224	7391	12 Volt, 24 Ampere Battery Cell
BAT-1265	7392	12 Volt, 65 Ampere Battery Cell

WE ENCOURAGE AND SUPPORT NICET CERTIFICATION
3 YEAR WARRANTY

Note: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Eaton business standard terms and conditions.