


ENVIROALERT PROFESSIONAL®
ENVIROALERT®

Accessory for:
TEMP-UL-S
TEMP-L-S
TEMP-L-W
TEMP-H-S
TEMP-H-W

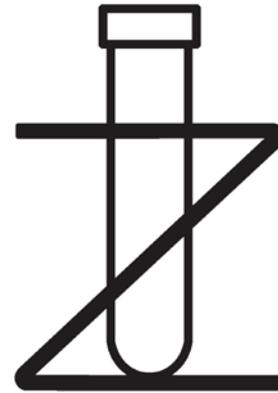

NOTE: To monitor temperatures below freezing (-47.2° to 32° F (-44° to 0°C) glycerin must be mixed with water. A mixture of 55% glycerin with 45% water by volume will accomplish this. TEMP-G-B (6 oz Bottle of Glycerin) sold separately.

TUBE and Z-Stand For Stainless Steel Temp Sensor Buffer

Fill tube with glycerin to monitor temperature readings of stored product of similar mass.
Slow sensor rate-of-change vs fast-reacting air temperature reading.
Monitor temperatures above and below freezing.
Avoid nuisance alarms for freezer/cooler defrost cycles.

Specifications

Operating Range	-47.2° to 77°F (-44° to 25°C)
Tube Capacity	1 fluid oz (30 ml)
Tube Height	4.25" (10.8 cm)
Z-Stand Dimensions	3 x 3 x 2" (7.62 x 7.62 x 5.08 cm)



Visit www.winland.com, call 800.635.4269 or email techsupport@winland.com to learn more.

424 North Riverfront Drive, Suite 200 • Mankato, MN • 56001 • 800.635.4269 • www.winland.com