

## WATERBUG<sup>®</sup>



### Multi-Zone Supervised Water Detection


- Connects to any hard wire or wireless alarm system.
- Hardwire powered.
- Includes four (4) surface sensors supervised (W-S-S)
- Dedicated single relay output simplifies wiring while 8 LED's indicate which zone is in alarm.
- Will not alarm due to condensation or humidity.
- Connect up to 8 W-S-S sensors (1 per zone) up to 500' (152.4 m) from console using 22-18 AWG twisted pair.
- Connect up to 16 W-S-U sensors (2 per zone) up to 500' (152.4 m) from console using 22-18 AWG twisted pair.

## Specifications

Power Requirements	12/24VDC 100 mA 12/24VAC 200 mA
Operating Range	Console and sensor 32 to 140° F (0 to 60° C)
Output	1 Form C Relay (N.O./N.C.) 1 Amp @ 24 VDC, resistive
Buzzer	Audible alarm with silence features (85 dB @ 10 cm @ 12 VDC); pulsed
Sensors Included	4 Surface sensors supervised (W-S-S) Max distance between sensor/console: 500' (152.4 m) per sensor
Console dimensions	6.55 x 4.70 x 1" (16.6 x 11.9 x 2.5 cm)
Sensors dimensions	Surface (W-S-S and W-S-U) 2 x 3 x 0.88" (5.1 x 7.6 x 2.2 cm) Under Carpet (W-UC-S and W-UC-U) 2 x 3 x 0.18" (5.1 x 7.6 x .5 cm)
Mounting:	Standard 3-gang box

## Accessory Sensors

Detection	Model Number
Water Sensor Surface (supervised)	W-S-S
Water Sensor Under Carpet (supervised)	W-UC-S
Water Sensor Surface (unsupervised)	W-S-U
Water Sensor Under Carpet (unsupervised)	W-UC-U

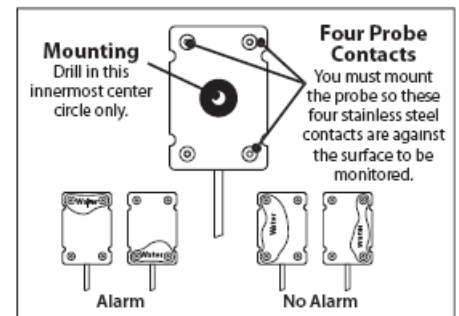

Visit [www.winland.com](http://www.winland.com), call 800.635.4269 or email [info@winland.com](mailto:info@winland.com) to learn more.

