



POI-2002 Version: 2

PoE Injector, 15.4W

The LevelOne POI-2002 is a Power over Ethernet injector that not only delivers a cost-effective solution for power distribution, but also provides a seamless way of deployment on the existing LAN infrastructure. With the use of power injectors, DC power of up to 15.4W and the data that comes from a non-PoE switch are merged together and then transmitted to the 802.3af compliant products such as PoE dome cameras through the Ethernet cabling. Hence, preserving your investment in hardware upgrade without the need for buying extra PoE switches. Furthermore, non-PoE devices like wireless access points can also be powered up remotely by adding additional PoE splitters, since power and data are further split into two cables, therefore these devices may be installed in hard-to-reach areas like ceilings where there are no any outlets or electrical wiring nearby.



1. PoE LED Indicators
2. RJ-45 Output Port
3. RJ-45 Input Port
4. Interlocking Feature

5. Power Socket
6. Interlocking Feature
7. Wall-Mountable

Key Features

- Minimize the need for a bulky power adapter and power line
- Delivering power and data to equipment via a single Ethernet cable
- Internal power supply
- High safety with surge protection
- Remote power feeding up to 100 meters
- PnP, Light Weight and compact size
- Unique interlocking feature for easy installation



Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10Base-T, Ethernet
IEEE 802.3u 100Base-TX, Fast Ethernet
IEEE 802.3af Power over Ethernet (PoE)

Port:

1 x 10/100Base-TX RJ-45 Input Port
1 x 10/100Base-TX RJ-45 PoE Output Port

Indicator:

Power, PoE

Pin Assignment and Polarity:

4/5 (+), 7/8 (-)

Power Input:

PoE Power Output: DC 52V / 15.4W
Unit Output Voltage: DC 52V / 0.3A
Power Requirement: 100-240V AC, 50/60Hz, 0.8A
Power Consumption: 15.4W (Max.)

Operating Temperature (°C):

Operating: 0°C ~ 45°C
Storage: 0°C ~ 70°C

Operating Humidity (Non-condensing):

Storage: 5% to 95%
Operating: 5 ~ 95%

Mount:

Wall mount

Physical Specifications

Dimensions (W x D x H mm):

87.9 x 51.3 x 166mm

Weight (g):

350g

Reliability

MTBF:


83.6323(K.hrs)

Approval and Compliance

EMI/EMS:

FCC Part 15, CE, RoHS

Diagram

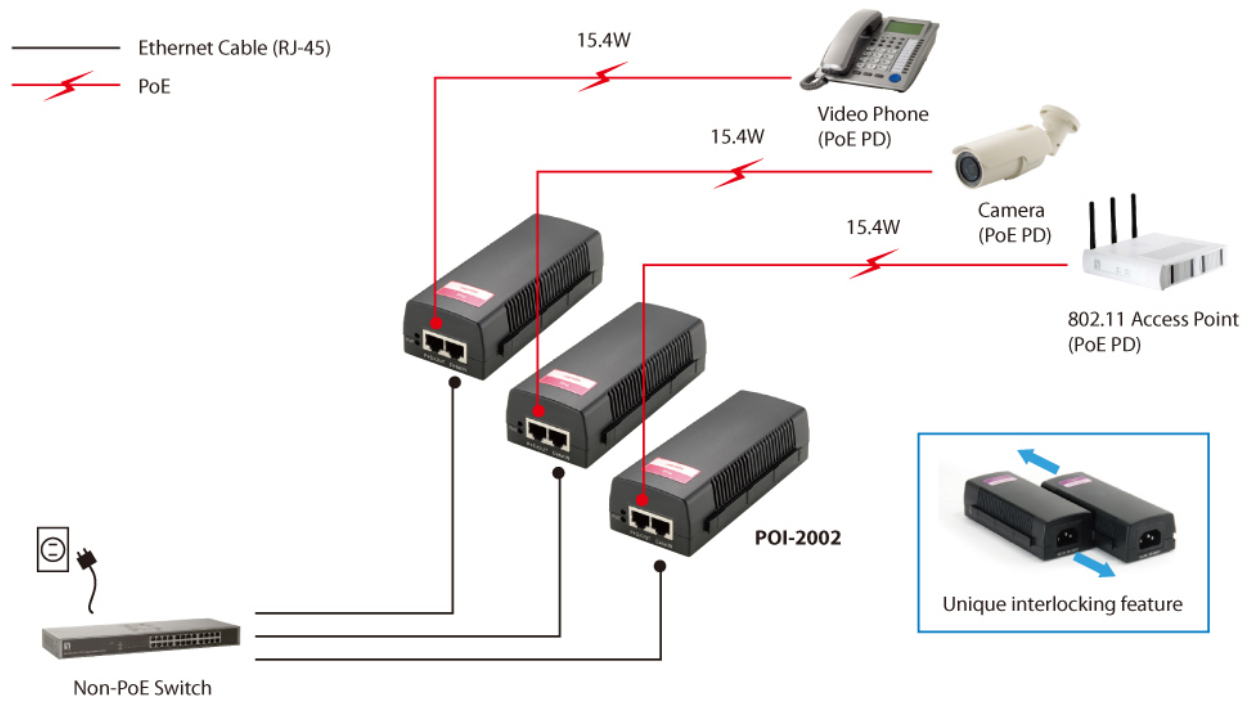

Order Information

POI-2002

Package Contents

POI-2002

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.