

N·E·A·R  
SIGNATURE



HIGH-PERFORMANCE LOUDSPEAKERS

---

N·E·A·R®



# N·E·A·R. SIGNATURE

**NEAR™ Signature S4 & S5 Loudspeakers** are compact, versatile, and feature NEAR's unique driver technologies which produce impeccable sound quality. With their compact form factor, these speakers are an excellent fit for most indoor environments or protected outdoor locations. By using the latest Ferrofluid formulations and robust, oversized, voice coils, the NEAR Signature speakers provide exceptionally high thermal endurance for unmatched long-term power handling and durability. The proprietary MDT™ metal-alloy cone structure and patented, spiderless MLS™ driver technology combine to create not only a sonically exceptional loudspeaker, but one which is highly resistant to moisture, humidity, heat, cold, salt, chlorine, and many other common environmental assaults.

Designed to both sound and look great, these speakers employ NEAR's unique MDT and MLS technologies; thick-walled, low-resonance ABS enclosures; scratch-resistant, powder-coated aluminum grilles; and compact, powder-coated cast aluminum swivel mounts.

#### Unique MDT (Metal Diaphragm Technology):

- Metal-alloy cones provide superior musical detail
- High rigidity and low mass of metal versus traditional papers and plastics (extremely stable cone structure)
- Fast transmission of sound through the diaphragm means lower energy storage, and a special anodizing process creates a ceramic coating for increased stiffness
- Efficient heat-sinking of voice coils for long-term, high-power situations

#### Patented MLS (Magnetic Liquid Suspension):

- Eliminates distortion caused by traditional fabric centering "spiders"
- Voice coil is more efficiently heat-sunked by fluid instead of air and constantly centered for low distortion
- Greater linearity is accomplished because the mechanical spider is eliminated
- Constant lubrication of gap prevents oxidation from humid environs

S4/S4T

S5/S5T

*NEAR™ Signature provides exceptional musicality in a surprisingly compact enclosure.*




# SIGNATURE



Rear View (S4TW shown)



S4/S4T

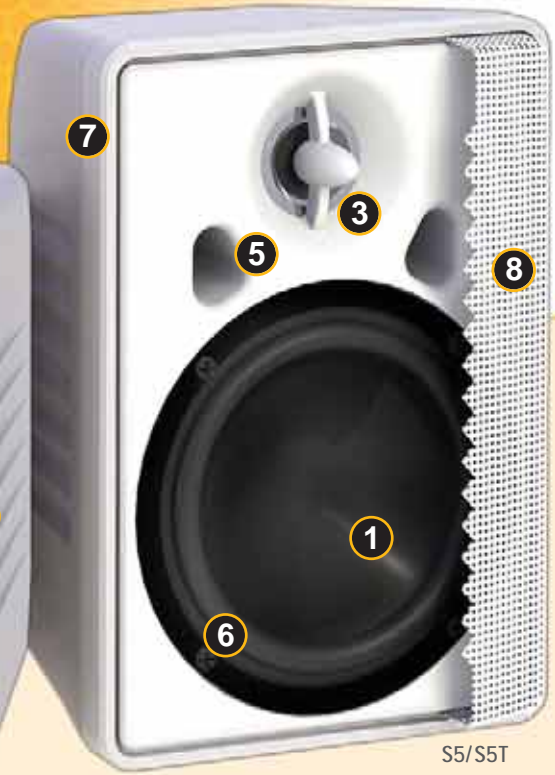


S5/S5T

1. Anodized Metal-Alloy Cone
2. Titanium Tweeter
3. Horn-Loaded Titanium Tweeter
4. Tuned Vent

5. Dual Arrayed Tuned Vents
6. Compound Rubber Cone Surround
7. Low-Resonance ABS Enclosure
8. Powder-Coated Aluminum Grille


9. Compact Swivel Mount Assembly
10. Power Level Selector ("T" version)
11. Terminal Input Connection
12. Safety Cable Attachment Point

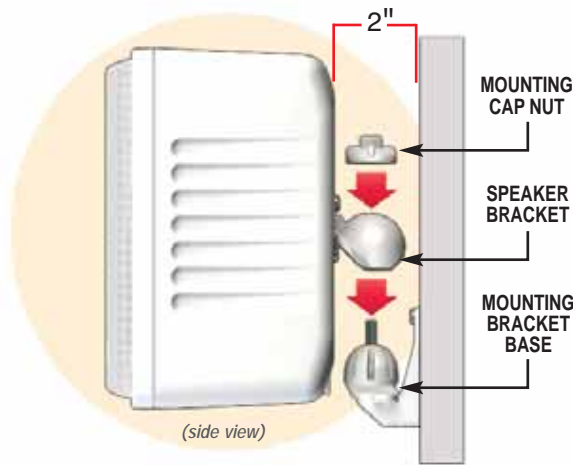

## Distinctive, Compact Swivel Mount Bracket Assembly

The NEAR Signature hemispherical swivel mount provides close-to-the-wall mounting, in both a vertical and horizontal orientation, while at the same time offering a wide range of movement for accurate aiming of the speaker. Once positioned, the precise angle is locked into place with a simple capnut that can be tightened by hand or with a nut driver. Made of cast aluminum for strength and powder-coated for durability, the simplicity of this 3-piece mount allows for a quick, straightforward installation. Simply secure the mounting bracket base to the mounting surface, attach speaker bracket to the speaker, drop the speaker over the mounting bracket base's stud, aim the speaker, and then tighten down the cap nut.





## Mounting Range of Movement for S5 and S4 Models

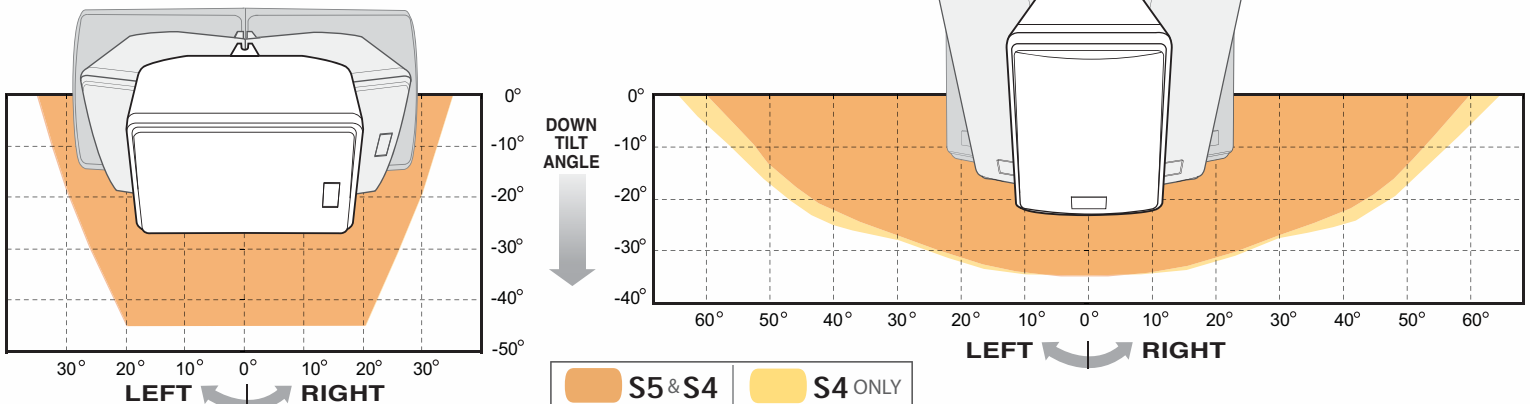

## NEAR Signature Technical Specifications and Responses

	S4/S4T	S5/S5T		S4/S4T	S5/S5T
Frequency Response (-10 dB)*:	58 Hz to 18 kHz	48 Hz to 17 kHz	Power Taps 70V:	16, 8, 4, 2, 1 watts	32, 16, 8, 4, 2, 1 watts
Low Frequency Design – Metal-Composite Cone Utilizing MLS Voice Coil Guidance System:	4-1/2" Nominal Dia.	5-1/4" Nominal Dia.	Product Weight:	S4: 5 lbs./S4T: 6 lbs.	S5: 8 lbs./S5T: 9 lbs.
High Frequency Driver – Titanium Cone:	1" Nominal Dia.	1" Horn-Loaded	Speaker Dimensions (WxHxD) Without Bracket:	5-1/4" x 8-1/4" x 5-3/8"	6-7/8" x 9-3/4" x 6-1/8"
			With Bracket:	5-1/4" x 8-1/4" x 7-3/8"	6-7/8" x 9-3/4" x 8-1/8"
Sensitivity (1W/1m, Avg. 100 Hz to 15 kHz):	86 dB SPL	89 dB SPL	Enclosure Material:	Thick walled, low-resonance, molded ABS	
Dispersion Horizontal:	150 Degrees	130 Degrees	Product Color:	White ("W" suffix) and Black ("B" suffix)	
Vertical:	120 Degrees	110 Degrees	Mounting Bracket Material:	Aluminum Alloy, Powder-Coated Finish	
Impedance Ratings Low:	8Ω Only (S4 version)	8Ω Only (S5 version)	Grille Material:	Perforated Aluminum, Powder-Coated Finish	
High:	70V and 8Ω (S4T version)	70V and 8Ω (S5T version)	Terminations:	Pressure Clamp	
			Included Accessories:	Color-Matched Mounting Bracket	
			Optional Accessories:	Safety Cable CK10	

\* Half-Space Response

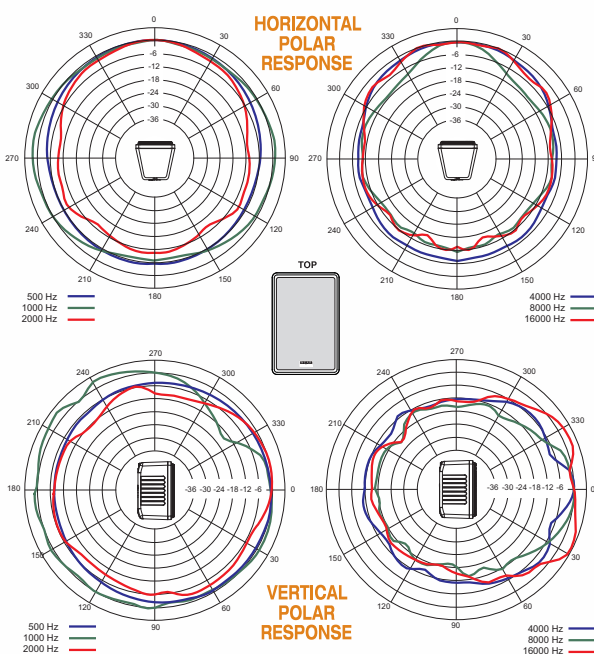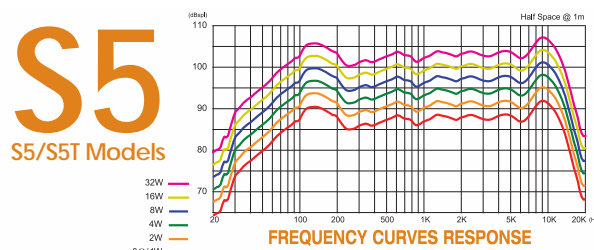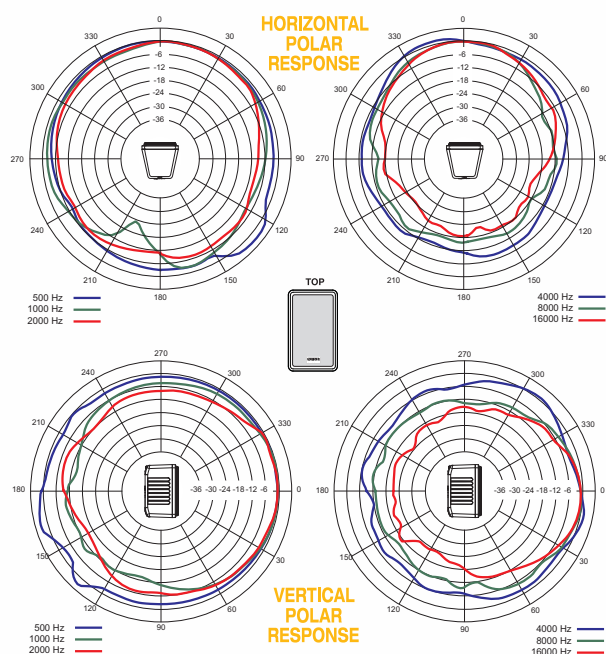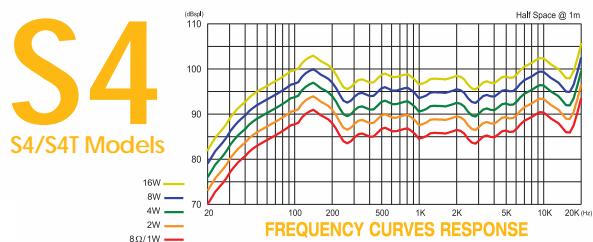

**BOGEN®**  
COMMUNICATIONS, INC.

50 Spring Street, Ramsey, NJ 07446 USA  
Tel: 201-934-8500 • Fax: 201-934-9832  
[www.bogen.com](http://www.bogen.com)

54-9290-01A 1102  
© 2010 Bogen Communications, Inc.  
Specifications are subject to change without notice.  
NEAR is a registered trademark of Bogen Communications, Inc.