

Enterprise Level


POWERULTRA

Salient's PowerUltra is a 2U rack-mount NVR designed to handle complex video surveillance requirements utilizing highly scalable memory, I/O capabilities and extended storage capacity, making it ideally suited for intensive digital video processing. Tailor your enterprise video requirements with the PowerUltra's offering of high performance CPU power, 32GB memory, hot-plug swappable hard drives and dual hot-plug redundant power supplies.

The lower overall system-level power draw is the result of breakthrough system design. The PowerUltra NVR maximizes performance per watt through a combination of power and cooling, and energy efficient technologies and tools.

FEATURES

- Record, live view, playback, archive video
- Hybrid NVR for analog (max 64 channels) and IP cameras
- Rack mount 2U form factor
- Front access with locking bezel for hotswap

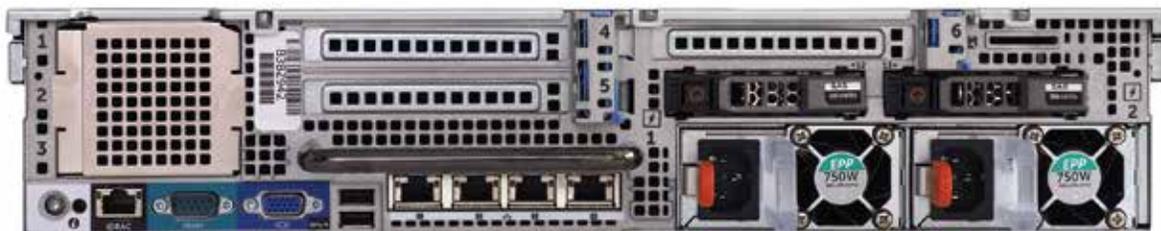

POWERULTRA

SYSTEM SPECS

Operating System	Windows Server 2012 R2 Standard
Processor	Dual Intel Xeon
Memory	32GB
Network	Quad 1Gbe NICs
Hybrid Capable	Up to 64 Direct connected analog cameras
IP Camera Support	Yes
Hard Drive (OS)	2 - 200GB SSD in RAID 1 configuration
Hard Drive (Video Storage)	12TB, 18TB, 24TB, 30TB, 42TB, 48TB, 54TB, 60TB, 66TB, 72TB, 80TB, or 88TB
RAID Controller	Yes
RAID Level of Storage	5 or 6
# of Hot Spares Supported	1 or 2

CHASSIS FEATURES

Form Factor	2RU Rackmount
Height	3.44 inches (8.73 cm)
Width	17.49 inches (44.40 cm)
Depth	26.92 inches (68.40 cm)
Weight	73.19 lb (33.2kg) max

WARRANTY

3 and 5 year (basic, NBD, or 4HR)

Graphics Adapter	Integrated
Video Display Ports	1 VGA (front), 1 VGA (rear)
USB Ports	1 USB 2.0 (front), 1 USB 3.0 (front), 2 USB 3.0 (rear)
Other Ports	1 serial port (rear)
Optical Drive	Optional external USB attached DVD-RW
Accessories	Keyboard, mouse & rail kit included
Life Cycle Controller	IDRAC 8
Life Cycle Controller Software	ACIU - iDRAC Enterprise software license for PowerUltra
DAS Support	Yes, PERC RAID controller required. Part number ACDB

OPERATING ENVIRONMENT

Operating Temp.	50°F - 95°F (10°C - 35°C)
Power Supply	Dual 750W - 100 to 240VAC auto ranging and redundant
Relative Humidity	
Operating:	10% - 80% non-condensing
Storage:	5% - 95% non-condensing
BTU	2559.1 BTU/hr