



The EN1751 water detector provides affordable early warning against damage caused by leaking appliances and standing water when used with the Honeywell® FP280 probe, sold separately.

Product Features

Alarms upon detection of 1/4" non distilled water
Tampers if probe wire is cut or disconnected
Fully supervised, with a 60-minute check-in interval

Product Specifications


Weight:	1.9 oz.
Typical battery life:	3 – 5 years
Internal battery type:	Panasonic CR123A
Operating environment:	
Temperature:	-4 to 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	60 minutes
Regulatory compliance:	FCC, RoHS

Mounting bracket




The mounting bracket hinges to the transmitter. Just mount the bracket and snap the transmitter in place.

Inputs

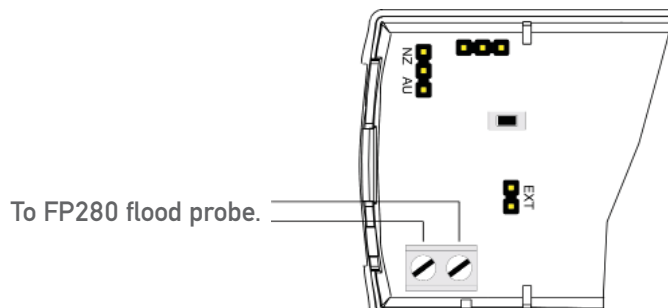

Dimensions

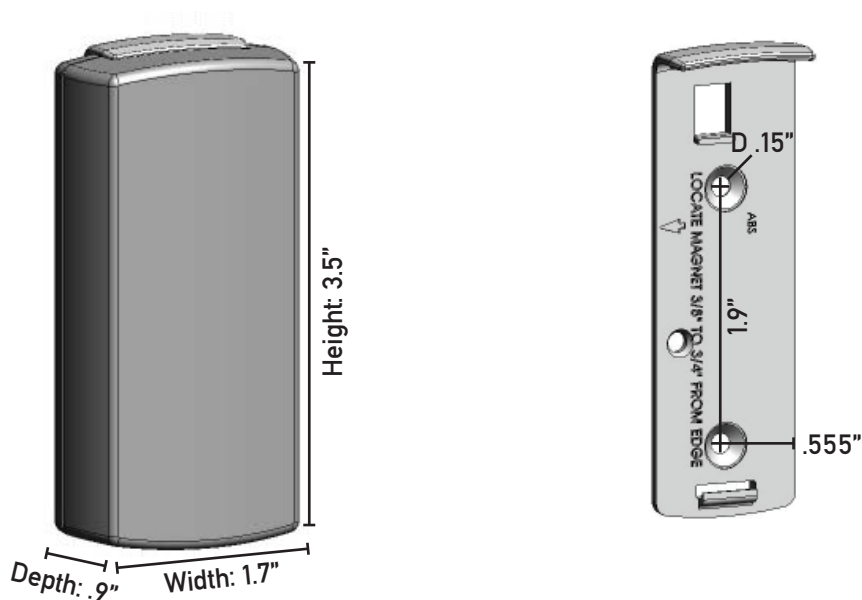

Reference Materials (available at www.inovonics.com)

EN1751 Water Detector Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.