



## Overview

MCLASS™ Unified Power Systems combine FlexPower® power modules alongside Mercury Security™ access hardware in one compact and secure UL Listed solution.

This unit is a 12V and 24V DC dual voltage access power system.

C8 lock control module provide eight access control inputs capable of voltage or dry contact activation and outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. D8 module provides eight auxiliary class II outputs and each output is configurable for 12 or 24VDC operation.

MCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.



## System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12 or 24 VDC outputs
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed outputs**
  - Eight auxiliary - class II at 2.5A each
  - Eight lock control - fused at 3A each
- ◆ **Expansion options**
  - Increased power, multiple voltages
  - Additional distribution outputs
  - Network monitoring and reporting
- ◆ **Lifetime Warranty**

## Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired power section
  - Pre-punched knockouts
  - Removeable backplate simplifies installs
  - Pre-defined hole pattern for power section
  - Access panels mount on threaded standoffs - no drilling required
- ◆ **Additional benefits**
  - Wire management room
  - 6.5" enclosure depth for battery sets
  - Tamper switch, lock, dual key set standard
  - Mounting hardware for access boards included

## Ordering

FP0150-B100C8D8PE6M

## Description


150W (12V & 24V) 8 lock / 8 aux outputs, MCLASS enclosure



## Specifications

<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   170 Watts (1.41 Amps) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	4A@12V and 4A@24V DC, 150W maximum combined output power Outputs: Continuous (DC1) Resettable DC2 8 auxiliary outputs, class II rated at 2.5 Amps per output 8 control outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 88%   System BTU Rating: 66 BTU/Hr
<b>Battery Charging</b>	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Charges up to 80Ah battery sets within UL limit Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System Fault (form "C" contacts) may be triggered by low/no battery, short to earth ground, power supply failure or blown fuse
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault   AC fault   Short to earth ground   Reverse battery polarity Fire Alarm Input activated B100: DC input, output and fault C8: DC outputs and fault D8P: DC outputs
<b>Regulatory Compliance</b>	UL294, UL603, UL1076, ULC S318, ULC S319
<b>Mercury/LSP</b>	CSA C22.2 #107.1, CSA 22.2 #60950
<b>Joint Listing</b>	CSFM / FCC Part 15, Subpart B CE
<b>Enclosure Dimensions</b>	Size: 30.00H x 23.00W x 6.50D in. (76.00 x 59.00 x 16.50 cm)   Weight: 45 lbs.
<b>Access Panel Mounting</b>	EP1501, EP1502, EP4502, EP2500, MR50, MR51e, MR52, MR16, LNL-500, 1100, 1200, 1300, 1320, 2000, 2210, 2220, 3300

## E6M Mercury Mounting Pattern

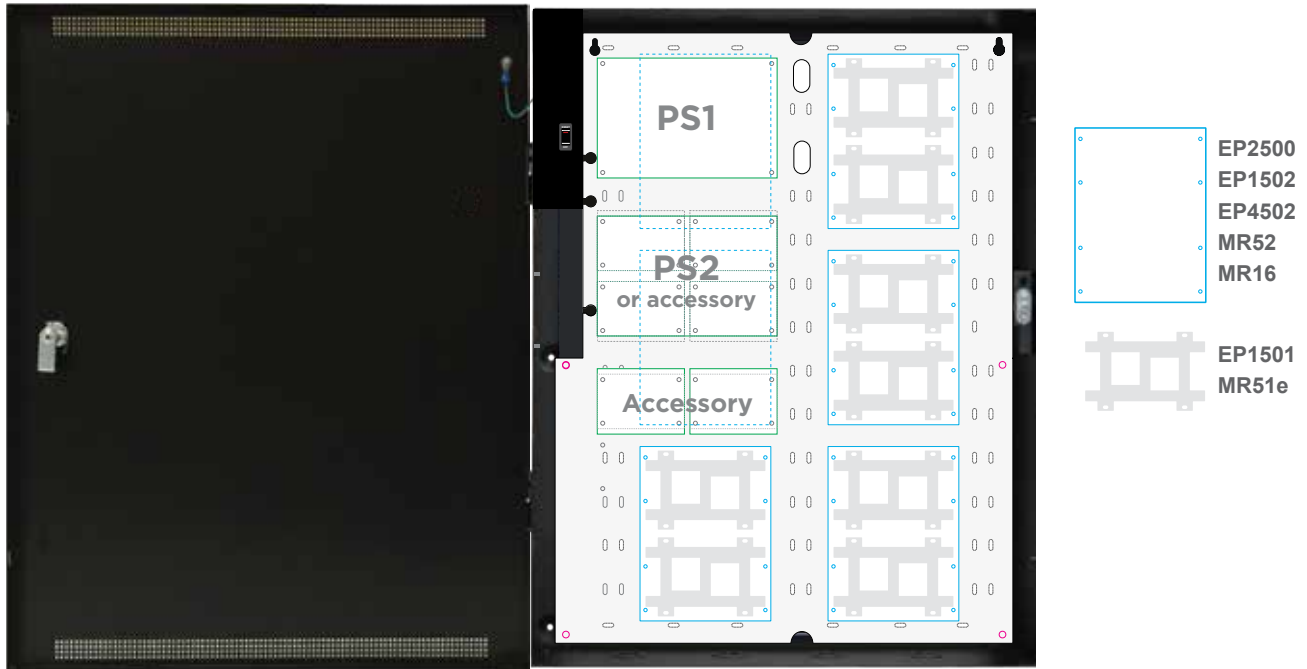


### Enclosure Features

- ◆ **Custom Backplate**
  - Light weight aluminum with AC and battery slots to protect cables
  - LSP pre-wired power modules reduce installation time
  - Vertical Mercury pattern for maximum design flexibility
  - Wide wire management channels for panduit or tye wrap
- ◆ **E6 Enclosure**
  - Protected AC cover with on/off circuit breaker for maintenance safety
  - Pre-drilled mounting holes for field upgrades
  - Deeper 6.5" cabinet accommodates large battery sets
  - Removable door with "fast disconnect" ground strap
  - Multiple knockouts all four sides

## E6 Enclosure Dimensions (H x W x D)

### 30.00" x 23.00" x 6.50" (76 x 58 x 16.5 cm)

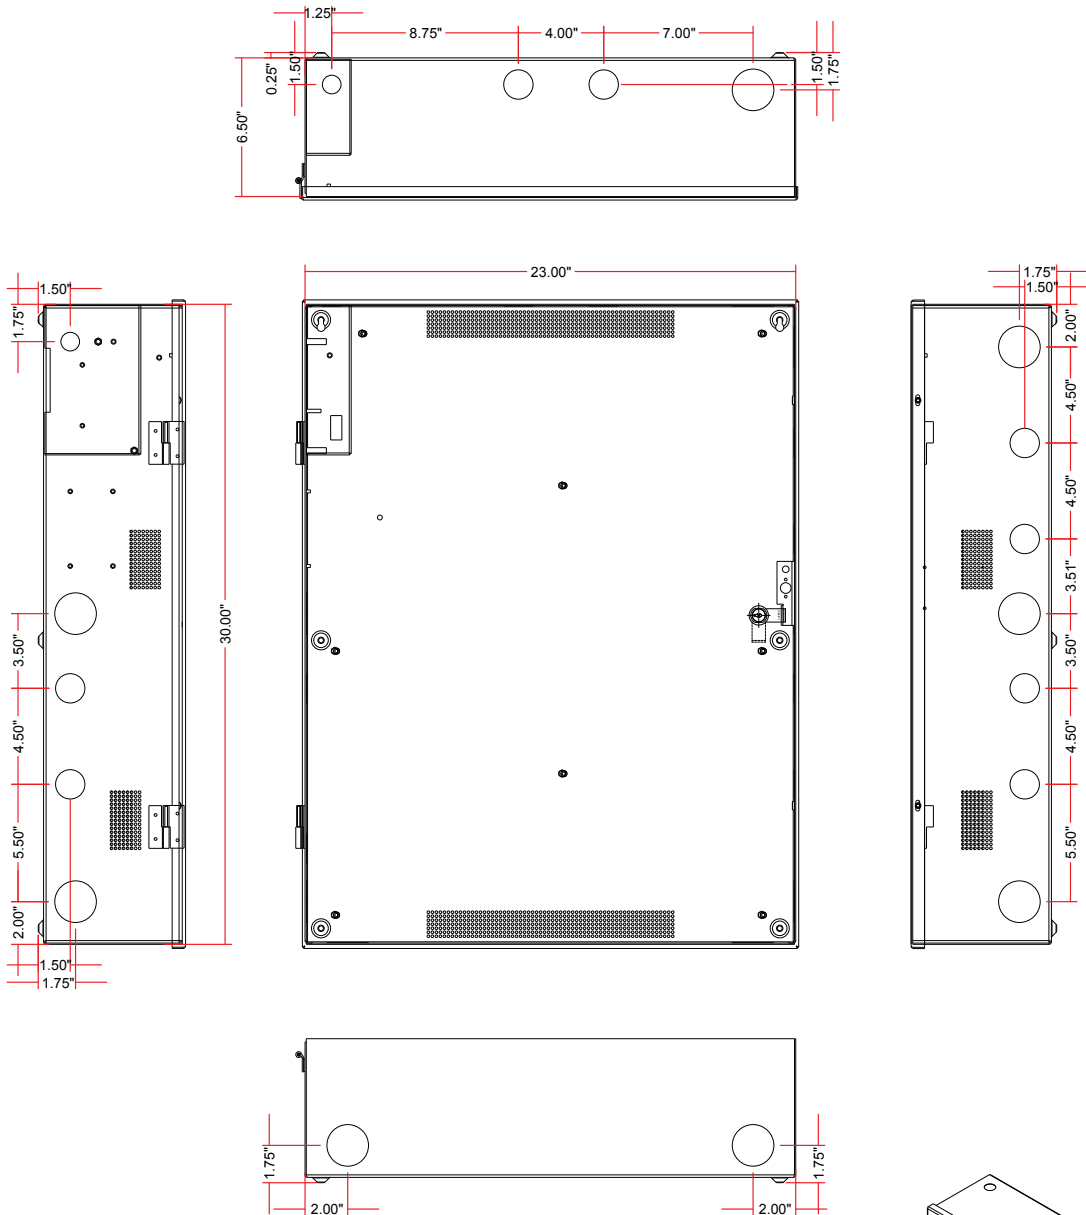

[lifesafetypower.com](http://lifesafetypower.com)

(888) 577-2898  
 info@lifesafetypower.com

Specifications subject to change without notice.

© 2017 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. This literature is for guidance only. It does not constitute recommendations, representation, or advice, nor is it part of any contract. Our policy is one of continuous product improvement, and the right is reserved to modify the specifications contained herein without notice.

P01-870A 09/17

**LifeSafety Power, Inc.**  
 304 Terrace Drive  
 Mundelein, IL 60060 USA

