



MODEL #	VZ-PVM-I1W4N
DISPLAY	
Screen Size	10.1"
Max. Resolution	1280 x 800 @60Hz
Pixel Pitch	0.1695 mm x 0.1695mm
Brightness	250cd/m²(Typical)
Contrast Ratio	700:1
Aspect Ratio	16 : 10
Viewing Angle (H/V)	140° / 130°
Display Color	16.7 Million
Response Time	< 30 ms
INTERFACE	
RJ-45 for IP Camera & Power	1
SD Card / USB In (Media Player)	1 / 1
SPECIAL FEATURES / ALARM CONTROL	
Video Obstruction Alarm	YES
Video Loss Alarm	YES
Door Open Alarm	YES
Power Loss Alarm	YES
CAMERA	
Camera Type	2.1 Mega Pixel IP Camera
Image Sensor	SONY IMX290 / Hi3516D
Lens	3.7mm Fixed Pinhole Lens
Total / Effect Pixel	1920(H) x 1080p(V) 30fps
Video Encode	H.265, H.264, MJPEG, CBR, VBR support
Video Out	1ch RJ-45 output
Motion Detection	Support
Ethernet Port	10 / 100 Base-T
Webclient Connection Protocol	TCP / IP
Support Protocol	TCP/IP, UDP, SMTP, HTTP, FTP, PPPOE DHCP, DNS, DDNS, UPNP, RTP, RTSP
Function	2D/3D NR, D-ZOOM, DPC, HLC/BLC, Defog D/N, WDR, AGC, AWB
Integration Protocol	Onvif 2.6
Web Application	IE 6 ~ 11, Firefox
MEDIA PLAYER	
External Storage	Support SD CARD (Max.64GB), USB (2TB)
VIDEO Format	RM, RMVB, AVI, DVIX, MKV, MOV, HDMOV, MP4, M4V, PMP, AVC, FLV, VOB, MPG, DAT, MPEG, TS, TP, M2TS, WMV, H.264, H.263, WMV9, VC-1, MPEG1/2/4
AUDIO Format	MPEG1/2/4, MP3, WMA, OGG, AAC, FLAC, APE, AC-3, DTS, ATRA, WAV, PCM
Image Format	JPEG, TIF, PNG, BMP
VIDEO Resolution	1080P @60Hz

VZ-PVM-I1W4N ADVANTAGES




- 10.1" IP Public View Monitor
- Onvif Compliant (Fully Compatible with VMS) - Profile S
- "A" Commercial Grade LED
- Built in 2 Mega Pixel Camera / Pinhole Lens
- Blinking Indicator LED(Blue, Red, Purple) / Blinking Message "Recording"
- Auto Power / Source Recovery / RJ-45
- Video Obstruction Alarm / Video Loss Alarm / Door Open Alarm
- Power Loss Alarm
- Camera Motion Sensor & Time Interval Based Source Switching
- P.o.E Support
- 3-Year Warranty

DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	9.88" x 8.31" x 1.65" (251.2 x 211.2 x 42.1 mm)
Net Weight / Gross Weight	4.62 lbs (2.1 kg) / 7.05 lbs (3.2 kg)
MOUNT	
VESA	75mm x 75mm, M4 x 8 Screws
AUDIO	
Built in speaker	2W x 2
GENERAL	
Transmitter - IR Remote Control	YES
Power	Electrical Ratings Consumption
	P.o.E. ≤ 24W
Warranty	Parts/ Labor MTBF (Approx.)
	3 Year / 3 Year 50,000 Hours
Operating Temperature	32 - 104°F / -10 - 50°C
Operating Humidity	5% - 90%RH
Regulation	CE, FCC(A), RoHS
Compatible Mounts	Wall
	VZ-WM05, VZ-WM11, VZ-AM01

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

Technical drawing of a rectangular object, likely a component of a machine. The drawing shows a top-down view of a rectangular plate with a central horizontal slot. On the left and right sides, there are pairs of small circular holes, possibly for screws or pins. The central slot is defined by two parallel lines, and there are small rectangular features at the ends of the slot, possibly for alignment or mounting.

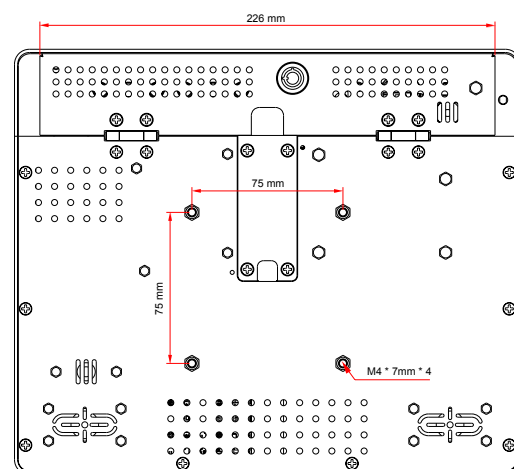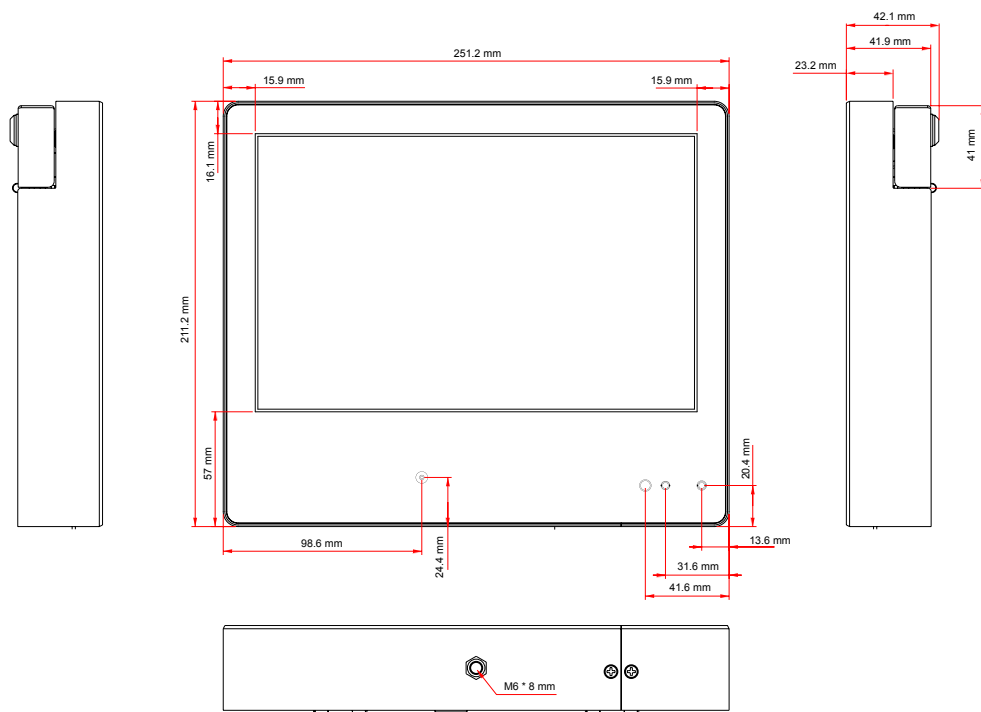

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.