

AVC-TB81F28

8MP HD-TVI FIXED BULLET CAMERA



Grey Available:
AVC-TB81F28-G

8MP HD-TVI FIXED BULLET CAMERA

8MP HD-TVI FIXED BULLET CAMERA WITH HD OVER COAX FEATURES


Our Second Generation HD-TVI Series continues providing the quality expected from the AVYCON brand. This 1080P 8MP camera includes an upgraded Smart IR LED array, new DIP switch design for easily changing video formats (HD-TVI, CVI, AHD and Analog), and a redesigned front face to help with a more accurate night view. With the newest generation chipset and board design, we have also increased power efficiency with a possible 20% savings in consumption. Also standard with this series is Digital NR, AGC, DWDR, and BLC capabilities along with IP67 outdoor rating.

FUNCTIONS

- 8MP (3840 x 2160)
- Fixed 2.8mm Lens
- HD-TVI / CVI / AHD / CVBS (Analog)
- Easy-to-Use DIP Switch to Change Formats
- True Day / Night
- Smart IR Illumination Up to 66ft.
- Digital NR
- DWDR
- IP67 Outdoor Rating
- DC 12V ($\pm 10\%$, 5W Consumption)

DIMENSIONS

Unit : inch (mm)

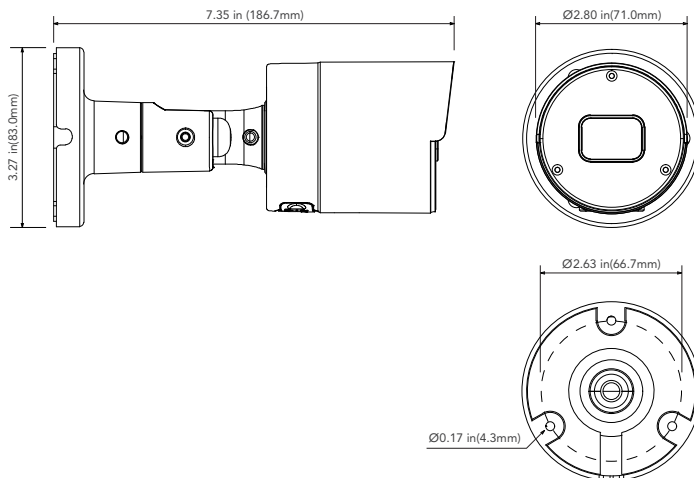

OPTIONAL ACCESSORIES



AVM-JB-BE-S1
JUNCTION BOX



AVM-CRM-A1
CORNER MOUNT



AVM-POM-A1
POLE MOUNT



AVYCON

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

AVC-TB81F28

8MP HD-TVI FIXED BULLET CAMERA

SPECIFICATIONS

CAMERA	
Image Sensor	1/2.7" Progressive Scan CMOS
Resolution	8MP
Image Size	3840 x 2160
Video Output	1-channel BNC Video Output
Image System	PAL / NTSC
Electronic Shutter	1/15s to 1/50,000s
IR Distance	Up to 66ft.
Video Formats	HD-TVI / AHD / CVI / CVBS (Analog)
Frame Rate	HD-TVI / AHD / CVI: 15 fps CVBS Analog: 30 fps
Min. Illumination	0.05luxF1.2(AGC ON), 0Lux with IR ON
Lens	Fixed 2.8mm Lens
Horizontal Field of View	105.41°
Lens Mount	M12
S/N Ratio	36dB
Function Control	OSD and CoC
IMAGE	
Day & Night	EXT / Auto / Color / BW (Black and White)
Digital WDR	Yes
Digital NR	Yes (3D DNR)
Auto Gain Control (AGC)	Yes
Auto White Balance (AWB)	Yes
Backlight Compensation (BLC)	Yes
Edge Brightness Compensation	Yes
Defog	No
HLC	Yes
Sharpness	Yes
Mirror Image	Yes
Smart IR (Anti-SAT)	Yes
Image Setting	Yes
Defect Correction	Auto / Manual
Language	Support for 12 Different Languages
GENERAL	
Angle Adjustment	Any Angle
Input Voltage	DC 12V (±10%)
Power Consumption	Maximum 5W
Ingress Protection	IP67
Working Environment	-22°~131° F (-30°~55° Celcius)
Dimensions	7.35" x 3.27" (186.7mm x 83.0mm)



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606

email: info@avycon.com

social: @avycon_aivo

website: avycon.com