

T1PHK3F8 Access & Power Integration Solution

Description

Altronix T1PHK3F8 kit consists of Trove1 enclosure, TC1 Openpath/Altronix backplane with one (1) 12VDC or 24VDC @ 6A power supply/charger, one (1) PTC access power controller. This kit also accommodates up to one (1) Openpath Core, Elevator Board, 4-Port or 8-Port modules for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T1PHK3F8

openpath

Key Features

- 12VDC or 24VDC power supply/charger.
- Accommodates up to one (1) Openpath OP-ACC, OP16EM, and one (1) OP-EX-4E or OP-X-8E modules.
- Convenient knockout configuration:
 - One (1) double knockout
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit).
 - Nine (9) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- 16 AWG galvanized steel backplane simplifies board layout and wire management.
- Supervision
 - AC Fail
 - Supervision (*cont'd*)
 - Low Battery and Battery Presence
 - Low power shutdown.
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information.
 - UL: UL294 - Access Control System.
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems.
 - CE European Conformity.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.
- Lifetime Warranty*.

*Altronix Power Supply/Chargers and Sub-Assemblies only

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

T1PHK3F8D

Access & Power Integration Solution

Specifications

Power Supply (eFlow6NB):

Input

| | |
|------------|---------------|
| Voltage | 120VAC, 60Hz. |
| Input Fuse | 5A/250V. |

Output

| | |
|---------|--|
| Voltage | 24VDC. |
| Current | 6A continuous. |
| Other | Overvoltage protection. Filtered and regulated. |

Battery Backup

| | |
|----------|---|
| Capacity | 7AH/12VDC (Up to 2 within enclosure). 40 AH/65 AH (requires separate enclosure). |
|----------|---|

Type Sealed lead acid or gel type.

Fuse Rating 10A/32V.

Failover Upon AC loss, instantaneous.

Supervision

AC Failure Form "C" contacts.

Battery Form "C" contacts.

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply).
Prevents deep battery discharge.

Indicators (LED)

Input 120VAC is present.

DC Output Powered.

Battery Discharged or not connected.

Access Power Controller (ACM8CB):

Input

| | |
|------------|----------------------|
| Voltage | 24VDC from eFlow6NB. |
| Input Fuse | 10A/250V. |

Outputs

| | |
|---|--|
| Voltage | 24VDC. |
| Eight (8) 24VDC independently controlled PTC outputs: | |
| a) Fail-Safe and/or Fail-Secure power outputs. | Form "C" Relays rated 28VAC or VDC @ 2.5A. |
| b) Auxiliary power outputs (unswitched). | |
| c) Any combination of the above. | |

Output PTCs 2.5A.

Indicators (LED)

Red LEDs Outputs are triggered (relays energized).

Green LED FACP disconnect is triggered.

T1PHK3F8D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE European Conformity.

Physical and Environmental

Dimensions (H x W x D)

18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm).

Weight (approx.)

Product 15.5 lb. (7.0 kg).

Shipping 19.5 lb. (8.9 kg).

Temperature

Operating 0°C to 49°C (32°F to 120°F).

Storage -20°C to 70°C (-4°F to 158°F).

Relative Humidity 85% +/-5%.

BTU/Hr (approx.):


12VDC: 40 BTU/Hr.

24VDC: 77 BTU/Hr.

T1PHK3F8D Access & Power Integration Solution

Access Controller Position Chart for the Following Models:

| Openpath | Pem Mounting |
|----------|--------------|
| OP-ACC | (A) |
| OP-EX-4E | (B) |
| OP-EX-8E | (C) |
| OP-16EM | (D) |

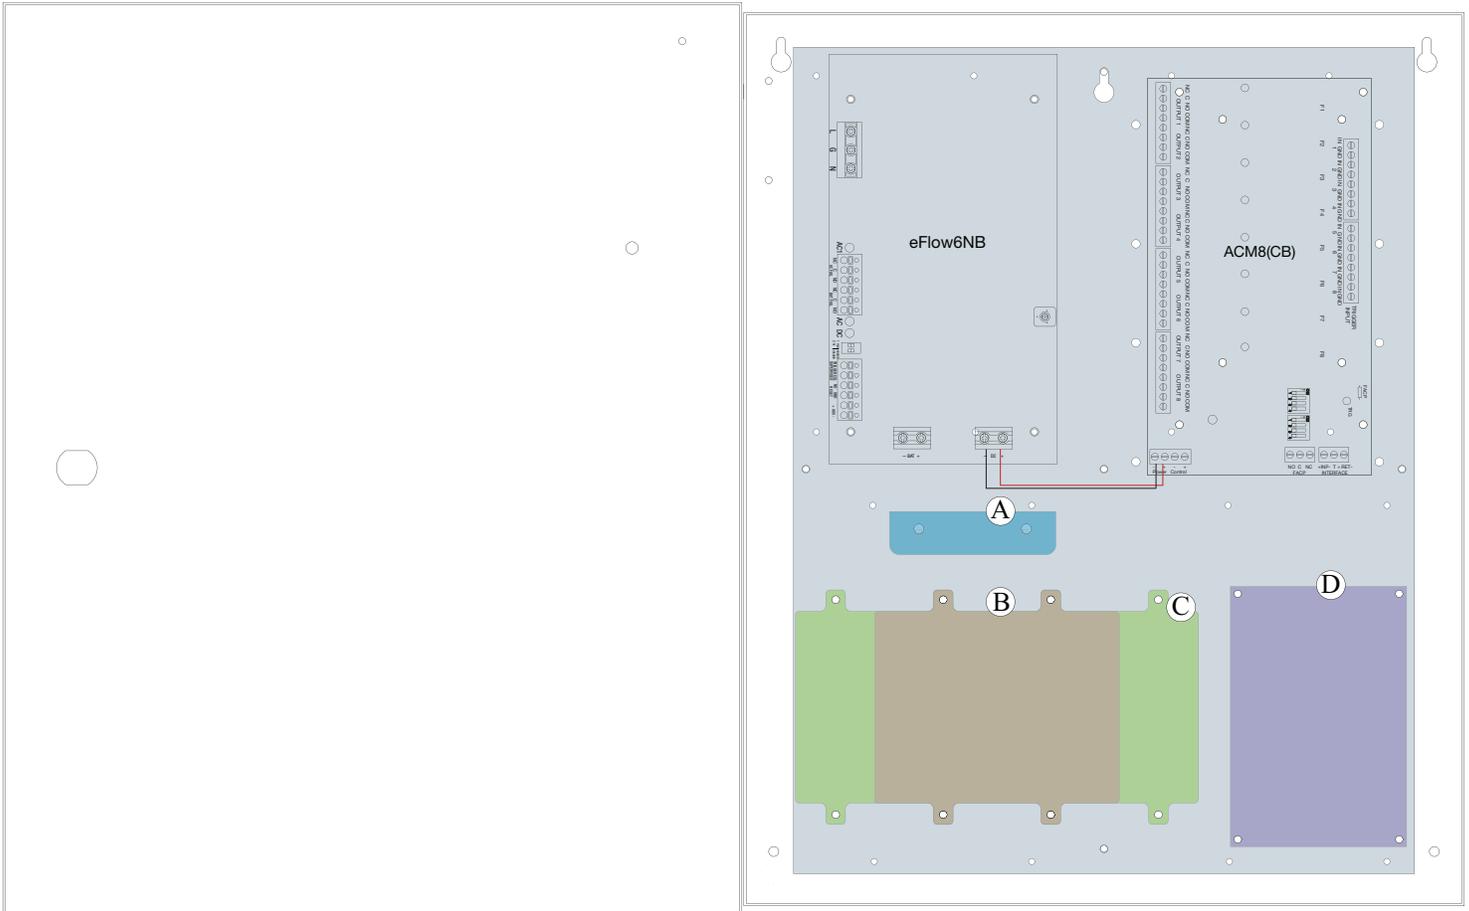

T1PHK3F8D

Access & Power Integration Solution

