

S5000 Series

Electrified Storefront
Rim & Vertical Rod Exit Devices



SDC's S5000 is a heavy duty, code compliant alternative to magnetic locks for storefront applications that require durability, superior aesthetics and smooth operation.

This UL305 panic-rated exit device is **American Made**, featuring all metal construction that is particularly suited to aluminum glass entrances for both manual and automated door openings and new or retrofit applications.

Not only does the SDC S5000 meet the market need for a storefront exit device with electric latch retraction standard, it also comes with optional request-to-exit monitoring for access control compatibility.

The S5000 with factory installed motorized electric latch retraction makes application as easy as **install – power – done**.



MODELS

S51 Rim

S58 Concealed Vertical Rod (CVR)



STANDARD FEATURES

- Electrified storefront design
- Motorized electric latch retraction and dogging
- High traffic use
- Low-energy automatic door operator compatible




OPTIONAL FEATURES

- Request-to-exit (REX)
- Latch status (LS)




APPLICATIONS


- Aluminum glass doors and frames
- Designed specifically for storefront doors
- New or retrofit construction
- Rim and concealed vertical rod devices
- Single or pair of doors
- Narrow, medium and wide stiles (2 1/8" minimum)
- Hinge, center pivot and offset pivot*

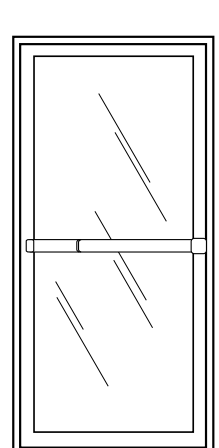

Rim Device on Single Door

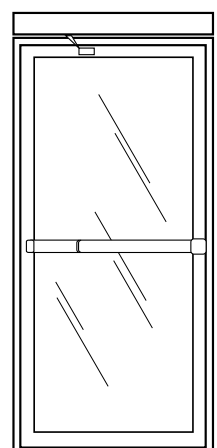






Rim Device with Automatic Door Operator

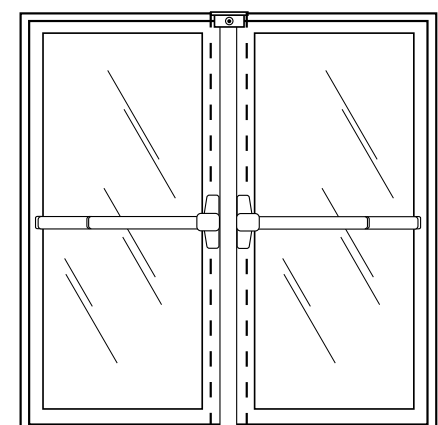

Two Concealed Vertical Rod (CVR)

* S5100 rim device requires a special strike extension block **ST51CV** (628 finish) or **ST51CY** (335 finish) to retrofit center-hung single door applications. See related products.

CROSS REFERENCE


| Series | S4000 | S5000 | S6000 | LR100 | IP100 |
|------------------------|---|---|---|--|---|
| |  |  |  |  |  |
| Application | Industrial | Storefront | Architectural | Retrofit ELR Kits | Retrofit ELR PoE Kits |
| Device Types | Rim, SVR | Rim, CVR | Rim, SVR, Mortise | ----- | ----- |
| Electrification | Motorized ELR | Motorized ELR | Motorized ELR, Electric Dogging, Alarmed Exit | Motorized ELR | Motorized ELR |
| | CLICK TO VIEW | CLICK TO VIEW | CLICK TO VIEW | CLICK TO VIEW | CLICK TO VIEW |




SPECIFICATIONS

| | S5100 | S5800 |
|------------------------------|------------------------------------|---|
| Device Type | Rim | Concealed Vertical Rod (CVR) |
| Door Width | 36", 42" | 36", 42" |
| Door Height | — | 7'0" |
| Door Thickness | 1¾" - 2" | 1¾" - 2" |
| Door Stile | Narrow (2⅞" Minimum) | Narrow (2⅞" Minimum) |
| Handing | Non-Handed | Non-Handed |
| Headcover | Powder Coated Zinc | Powder Coated Zinc |
| Rail | Anodized Aluminium | Anodized Aluminium |
| Pushpad | Anodized Aluminium | Anodized Aluminium |
| End Cap | Powder Coated Zinc | Powder Coated Zinc |
| Projection | 2⅝" Neutral 2¾" Depressed | 2⅝" Neutral 2¾" Depressed |
| Latch | ¾" Throw Stainless Steel | ¾" Throw (Top & Bottom) Stainless Steel (Top & Bottom) |
| Deadlatch | ⅝" Throw, Stainless Steel | — |
| Strike | Stainless Steel | Stainless Steel (Top & Bottom) |
| Vertical Rods | — | Aluminum |
| Weight | 13 lbs | 17 lbs |
| Input | 24 VDC ± 10% | 24 VDC ± 10% |
| Current Draw | 700 mA Inrush 200 mA Continuous | 700 mA Inrush 200 mA Continuous |
| Request-to-Exit (REX) | SPDT 3 Amp @ 250 VAC Resistive | SPDT 3 Amp @ 250 VAC Resistive |
| Latch Status (LS) | SPDT 5 Amp @ 250 VAC Resistive | SPDT 5 Amp @ 250 VAC Resistive |

S5100 RIM DEVICE*

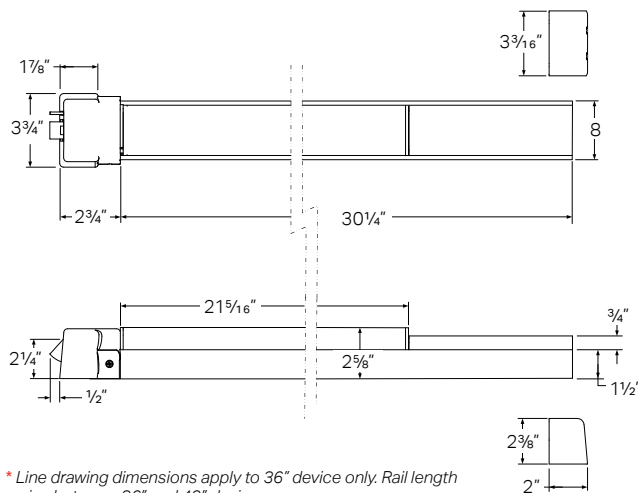

S5800 CVR DEVICE*

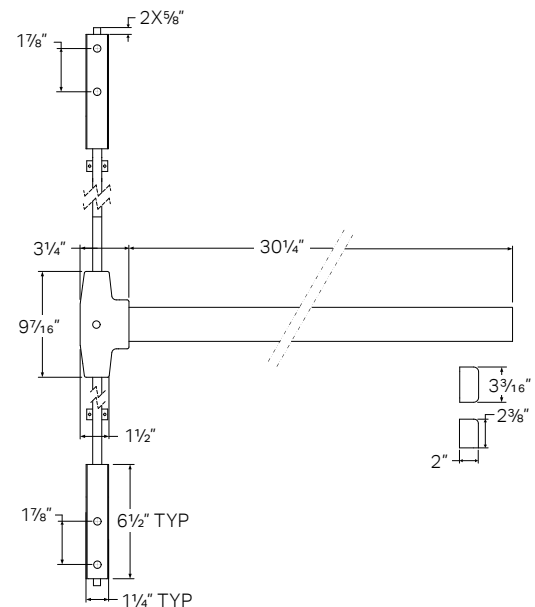

CERTIFICATIONS

UL 305 Panic Hardware
ANSI/BHMA A156.3 Grade 1

HOW TO ORDER

FOLLOW STEPS FOR ORDERING

 Designates optional step

1| SPECIFY DEVICE TYPE

- S51** Rim
- S58** Concealed Vertical Rod (CVR)

2| SPECIFY FUNCTION

- 01** Exit Only (No Trim)


3| SPECIFY RATING

- P** Panic Device 

4| SPECIFY FINISH

- V** 628 Dull Aluminum 
- Y** 335 Dull Black

5| SPECIFY LENGTH

- 36** 36" Door Opening 
- 42** 42" Door Opening

6| SPECIFY OPTIONS

- R** Request-To-Exit (REX)
- L** Latch Status (LS)

7| SPECIFY ELECTRIFICATION

- E** Motorized Electric Latch Retraction & Dogging 

| STEP NUMBER: | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|-------------------|------------|-----------|----------|----------|-----------|----------|----------|
| ORDERING EXAMPLE: | S51 | 01 | P | V | 36 | R | E |

RELATED PRODUCTS

RETROFIT STRIKE BLOCK*

ST51CV Rim Strike Block for Center-Hung Single Door Retrofit Applications, 628 Finish

ST51CY Rim Strike Block for Center-Hung Single Door Retrofit Applications, 335 Finish


* S5100 rim device requires a special strike block to retrofit center-hung single door applications.

KEY CYLINDERS

RIM-CYL-KA** Rim Cylinder, 6-Pin, Keyed Alike



** Not compatible with narrow stile doors. For use with medium and wide stile doors only.

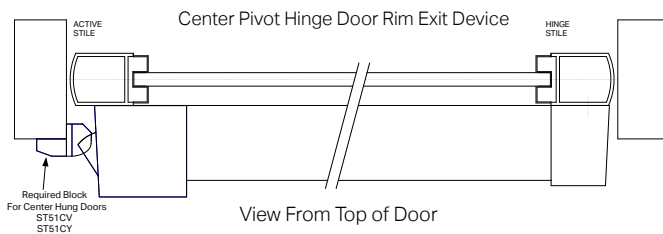

COMPONENT CONSIDERATIONS

LOW ENERGY OPERATORS

[CLICK TO VIEW](#)



SDC's low energy swing door operators are designed for applications requiring ADA compliance, user convenience and touchless solutions. The state-of-the-art microprocessor-based operator is self-tuning and self-learning while offering non-handed operation, full mechanical stops, door sequencing and a variety of interface options for sensors, push-plates, fire alarms and electrified locks. A built-in 1 Amp power supply allows users to power electric latch retraction directly from the operator.

POWER TRANSFER DEVICES

[CLICK TO VIEW](#)



Electrified power transfer hinges (PTH Series), loops (PT Series) and mortise devices (PTM Series) provide both surface and concealed methods for running wires from the frame to transfer power and monitoring signals to doors equipped with electric locks and exit devices. Wireless power transfer devices (WPT Series) wirelessly transfer power and monitor latch bolt status, REX or data signals to electrified locks and latches.

PUSH PLATES & PANELS

[CLICK TO VIEW](#)




SDC's push plates and panels combined with SDC's operators, bollards and locking devices allow for complete access and egress solutions for ADA compliant applications. Included are round and square push plates, as well as wall mount and full-size push panels. All types can be wireless or hardwired, bollard or wall mounted. ADA compliant solutions work seamlessly with low energy swing door operators like Auto EntryControl™.

KEYPADS & READERS

[CLICK TO VIEW](#)



SDC has a variety of digital keypad and proximity card access control system equipment to meet any need. SDC's keypads and readers are engineered to provide real-world door control of a single opening up to 100 doors, such as indoor, outdoor and PC-based systems, while ensuring fire and life safety code compliance along with superior expandability and flexibility in authorization identification, authentication, access approval and accountability of entities through login credentials.

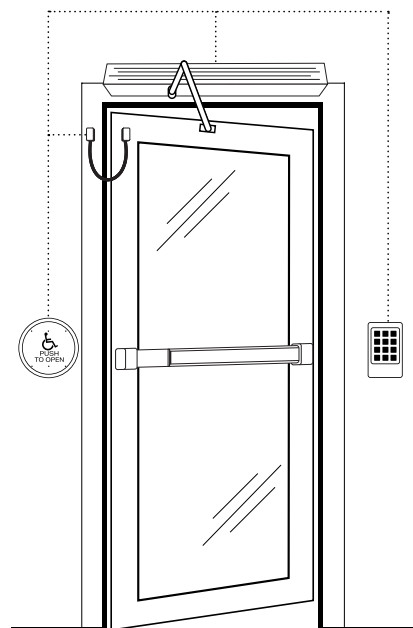

POWER CONTROLLERS

[CLICK TO VIEW](#)



SDC access control power supplies have been developed specifically to support access controls and electric locking hardware. They are UL listed and provide filtered and regulated linear DC power, with optional control logic, component interface, alarm interface and battery back-up to meet the requirements of single and multiple access-controlled openings. The circuitry design is ideal for the inductive loads generated by access control hardware for high performance and longevity.

DOOR CONTROLS & BACKUP BATTERIES

[CLICK TO VIEW](#)



SDC's door control relay modules ensure compatibility of access hardware components and simplify system installation and troubleshooting. Different modules may be specified for one power supply. The isolated relay design allows trigger signals over small gauge cable runs of 22 gauge wire up to 1,000 feet from the trigger device to the module. SDC's engineered system design services are available when you purchase SDC locks, control modules and power controllers for your door opening applications.

