

# TR-MR64R-B

64-CH SMART Series Performance NVR  
with Turing Vision Bridge



## Key Features

- ✓ Turing Vision cloud-ready with included Bridge Hardware
- ✓ Vision Core features - People & Vehicle Attribute Search, LPR & More
- ✓ Cloud storage of event thumbnails and video clips
- ✓ Turing SMART Series IP cameras recommended
- ✓ Third-party IP cameras supported by NVR and Vision cloud
- ✓ Remote maintenance through Turing Vision Cloud
- ✓ Local full time recording on up to 8 SATA HDD
- ✓ Two RJ45; 384 Mbps inbound throughput




## SPECIFICATIONS

Video/Audio Input	
IP Video Input	Up to 64 Channels
Two-Way Audio Input	1-Ch, RCA
Network	
Incoming Bandwidth	384 Mbps
Outgoing Bandwidth	384 Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO	
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1/HDMI2(HDMI audio not supported): 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50H 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/ 720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Image Rotation Mode Screen	3/4/5/7/9/10/12/16/32
Decoding	
Decoding Format	Ultra 265, H.265, H.264
Live View Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/ 720p/D1/2CIF/CIF
Decoding Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1

Hard Disk	
SATA	8 SATA interfaces
Capacity	Up to 10 TB for each disk
eSATA	1 eSATA interface
Disk Array	
USB Interface	RAID 0, 1, 5, 6, 10
External Interface	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Front panel: 2 x USB2.0 Rear panel: 1 x USB3.0
Serial Interface	1 x RS485, 1 x RS232
Alarm In	16-ch
Alarm	4-ch
GENERAL	
Power Supply	100 ~ 240 V AC Power Consumption: ≤25W(without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions	442mm x426mm x 89mm (17.4" x 16.8" 3.5")
Net Weight	≤5.7kg (12.57lb)
COMPATIBILITY	
Recommended Turing Cameras	SMART Series
ONVIF	Supported (S, G, T Profiles)



DIMENSIONS

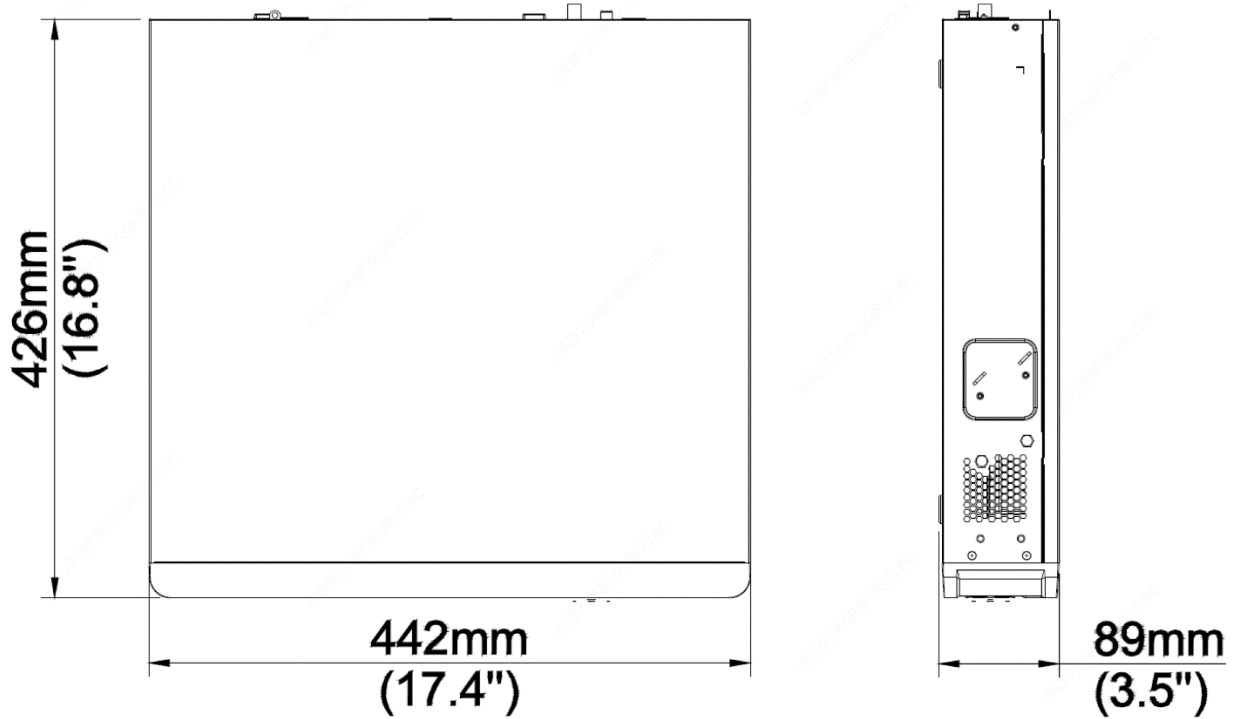

REAR PANEL

