



HDMI AUDIO EXTRACTOR

0E-HDMICONV2



SUPPORTS RESOLUTIONS UP TO 4K@60 4:4:4 8BIT AND HDCP 2.2 COMPATIBILITY. EASY TO INSTALL AND FEATURES DIP SWITCH FOR AUDIO SETTING IN EDID

SPECIFICATIONS:

Technical

- Input/Output Port:
1 x HDMI IN, 1 x HDMI OUT, 1 x S/PDIF OUT, 1 x AUDIO OUT,
1 x DC 5V IN
- Resolution Supported:
Input: **VESA:** 800x600⁸, 1024x768⁸, 1280x768⁸, 1280x800⁸, 1280x960⁸,
1280x1024⁸, 1360x768⁸, 1366x768⁸, 1440x900⁸, 1600x900⁸, 1600x1200⁸,
1680x1050⁸, 1920x1200⁸
SMPTE: 720x480P^{7,8}, 720x576P⁶, 1280x720P^{6,7,8}, 1920x1080P^{6,7,8},
3840x2160P^{2,3,5,6,8}, 4096x2160P^{2,3,5,6,8}
Output: **VESA:** 800x600⁸, 1024x768⁸, 1280x768⁸, 1280x800⁸, 1280x960⁸,
1280x1024⁸, 1360x768⁸, 1366x768⁸, 1400x1050⁸, 1440x900⁸, 1600x900⁸,
1600x1200⁸, 1680x1050⁸, 1920x1200⁸
SMPTE:
720x480P⁸, 720x576P⁶, 1280x720P^{6,8}, 1920x1080P^{1,2,3,4,5,6,7,8},
3840x2160P^{2,3,5,6,8}, 4096x2160P^{2,3,5,6,8}
- Maximum Data Rate: 18Gbps
- Maximum Pixel Clock: 600MHz
- Audio Format:
SPDIF OUT: PCM 2.0, up to Dolby Digital and DTS 5.1
AUDIO (L/R) OUT: PCM 2.0
HDMI IN/OUT: PCM 2.0/5.1/7.1, Dolby True HD and DTS HD Master Audio
- Transmission Distance: 80m/260ft
- Warranty: 2 years


- PART#: 0E-HDMICONV2
- UPC: 840049305762

General

- Operating Temperature:
0°C to 45°C (32°F to 113°F)
- Storage Temperature:
-20°C to 70°C (-4°F to 158°F)
- Humidity:
10% to 90%, non-condensing
- ESD Protection:
±8kV (Air-gap discharge)/
±4kV (Contact discharge)
- Surge Protection: Voltage: ±1 kV
- Power Supply: DC 5V 1A
- Power Consumption: 2.88W
- Device Dimension:
8.0cm x 2.2cm x 9.0cm/3.15" x 0.87" x 3.54"
- Product Weight: 0.23kg/0.51lb

For more information please call 1-833-574-9124
or email AVARRO@adiglobal.com

To learn more about AVARRO products visit
avarro.adiglobaldistribution.us

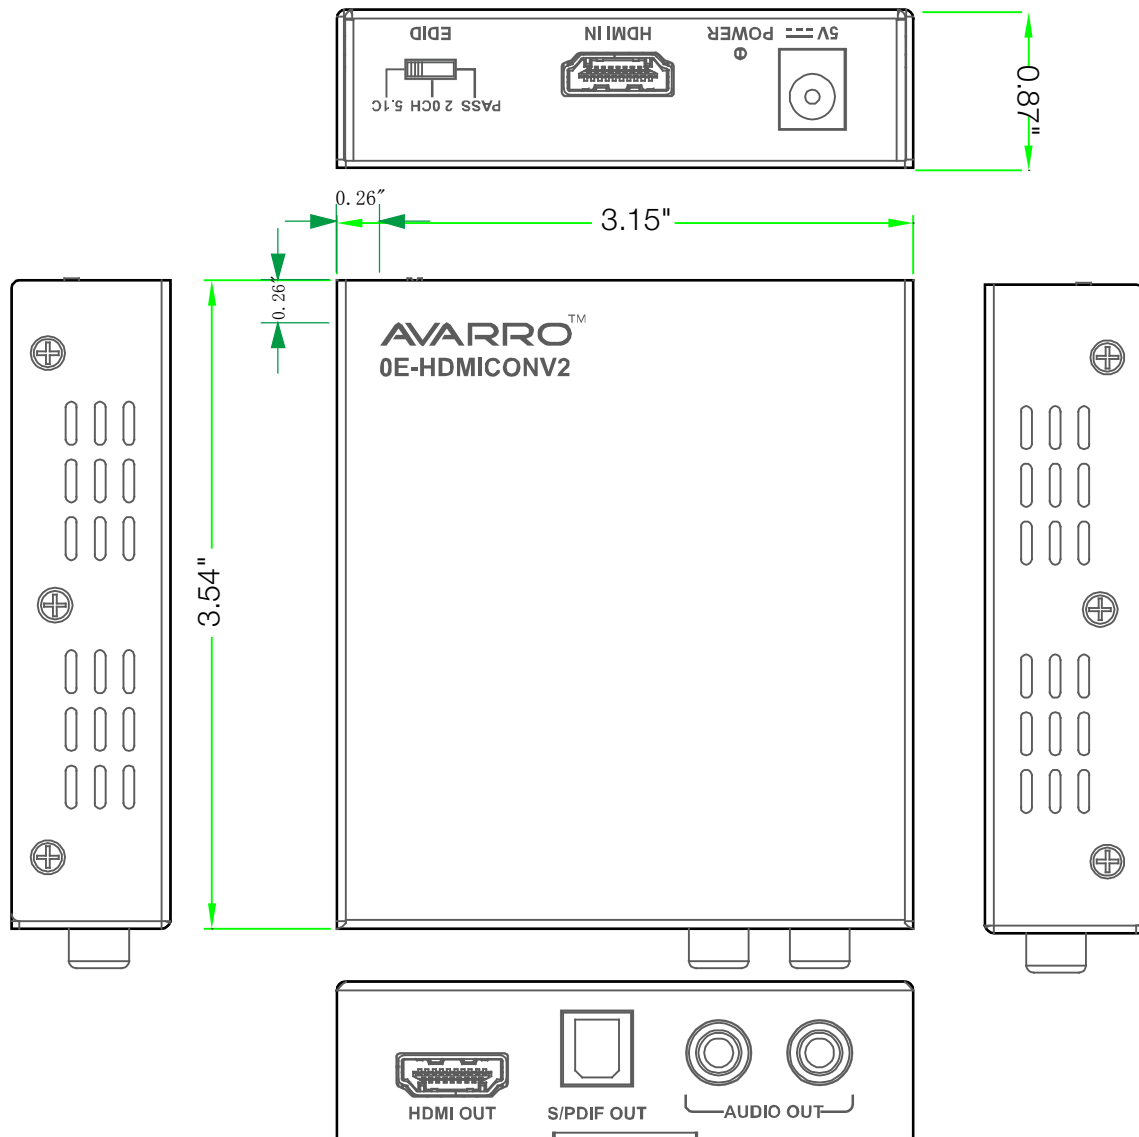

For more information please call 1-833-574-9124
or email AVARRO@adiglobal.com

To learn more about AVARRO products visit
avarro.adiglobaldistribution.us