

- **Shrink Temperature**
194°F (90°C)
- **Versatile And Economical**
Termination Solution
- **Wide Selection Of Sizes**
And Colors
- **Resists Common**
Automotive Chemicals
- **Easily Installs Over**
Connectors And Splices

Put-Ups

Nominal Size	Part #	Unshrunk Diameter /mm	Shrunk Diameter /mm	Put-Ups		Available Colors	Lbs/ 100'
				Bulk Spool	Shop Spool		
1/16"	H3N0.06	1.5	0.5	500'	25'	11	0.18
1/8"	H3N0.13	3.0	1.0	500'	25'	11 & YG	0.37
3/16"	H3N0.19	4.5	1.5	500'	25'	11 & YG	0.55
1/4"	H3N0.25	6.0	2.0	250'	25'	11 & YG	0.74
3/8"	H3N0.38	9.0	3.0	200'	25'	11 & YG	1.01
1/2"	H3N0.50	12.0	4.0	200'	25'	11 & YG	1.28
3/4"	H3N0.75	18.8	6.0	200'	25'	11 & YG	1.87
1"	H3N1.00	24.0	8.0	100'	25'	11 & YG	2.86
1 1/2"	H3N1.50	38.0	13.0	100'	25'	11	4.51
2"	H3N2.00	50.0	17.0	100'	25'	11	6.33
3"	H3N3.00	75.0	25.4	100'	20'	BK	10.33



Cut Cleanly

Scissor

Material
Polyolefin

Grade
H3N

Economical 3:1 Heatshrink Tubing Shrinks To 1/3 its original diameter!

Shrinkflex heatshrink tubing is the ideal way to create a tight, professional finish on any wire, hose or cable management project. Once shrunk, the tubing will hold its reduced state even in elevated temperatures. The wide range of available colors and diameters makes a perfect solution for any termination application.

The high shrink ratio of 3:1 ensures that it will slip over large connectors or plugs and still provide a tight, professional seal.

Colors Available:
11= call for availability of colors.



Match the color of braided sleeving with our 3:1 Shrinkflex tubing and create a unified finished look.



Black (BK), Brown (BR), White (WH), Gray (GY), Clear (CL), Blue (BL), Green (GN), Yellow (YL), Orange (OR), Red (RD) and Purple (PP).

- Yellow Green(YG) is available in select sizes as a Ground ID

FLAMMABILITY

Moisture Absorption % ASTM D-570 _____ 0.5

Flammability Rating _____ UL 224, VW-1

CHEMICAL RESISTANCE

Corrosion ASTM DTL-23053 _____ No Corrosion

Fluid Resistance (73°F/ 23°C 24 hrs.) _____ 1,000

Shrinks
194°F (90°C)

Melt Point

ASTM D-2117

392°F (200°C)


Maximum Continuous

MIL-I-23053

275°F (135°C)

Minimum Continuous

-67°F (-55°C)

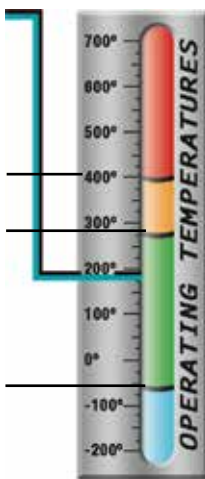

Measure the Shrinkflex® tubing to length and cut with a scissor. The thickness of your bundle, as well as the desired final appearance, will determine the length of the tubing you cut. Generally, a piece 1 1/2" - 2" long will accommodate almost any need. Single wires, or smaller bundles, require shorter pieces.



Slip the Shrinkflex® tubing over the bundle and position it so that both the sleeved and unsleeved portions are sufficiently covered. Notice the small pieces of tubing installed on single wires as part of a color coding system. If your project requires multiple operations, always work up from the smallest to the largest bundle.



Gently apply heat to Shrinkflex® tubing from a heat gun, hair dryer or torch with an appropriate attachment. Keep the heat source far enough away so that hot metal or direct flame does not come in contact with the tubing, wires or sleeving. Move the heat around the bundle to prevent damaging the sleeving and to ensure that all areas of the tubing have been shrunk. Once cooled, your installation is complete.

PHYSICAL PROPERTIES

Recommended Cutting _____ Scissors

Stock Colors _____ 12

Tensile Strength PSI ASTM D-638 _____ 1,500

Elongation % ASTM D-638 _____ 200

Specific Gravity _____ 1.35
ASTM D-792

Low Temperature flex (-67°F/-55°C) _____ No Cracking
MIL-DTL-23053

Heat Shock (482°F/250°C) _____ No Cracking
MIL-DTL-23053

Heat Resistance (347°F/175°C, 168 Hrs.) _____ 100
ASTM D-638

Secant Modulus PSI ASTM D-882 _____ 25,000

Longitudinal Change _____ +5, -15
% MIL-DTL-23053

Dielectric Strength (volts/mil) _____ 500
ASTM D-876

Volume Resistivity (ohm-cm) _____ 1.0×10^{14}
ASTM D-876