

WP3 NEMA Rated Outdoor Power Supply/Battery Enclosure

Description

Altronix WP3 is a UL Listed, NEMA 4/4X, IP66-11 Rated power supply/battery outdoor enclosure. It can accommodate a wide variety of Altronix power supplies, sub-assemblies, and accessories.



WP3

Specifications

Features

- Lightweight molded fiberglass reinforced polyester enclosure is corrosion resistant and does not contain halogens.
- Lockable stainless steel latches.
- Integral flanges simplify wall or pole mounting.

Capacity

- Fits two (2) 12VDC/7AH batteries.

Agency Listings

- UL Listed Enclosure.
- CE European Conformity.

Physical and Environmental

Dimensions (H x W x D)

13.3" x 11.3" x 5.6" (338.1mm x 287.3mm x 142mm).

Product Weight 7.0 lbs. (3.18 kg).

Shipping Weight 8.3 lbs. (3.76 kg).

Accessories

PMK1 Pole Mount Kit (order separately)

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Kit includes:

- Two (2) powder coated steel mount brackets.
- Four (4) stainless steel bolts.
- Four (4) stainless steel lock washers.
- Two (2) wormgear quick release straps.




PMK1

WP3
NEMA Rated
Outdoor Power Supply/Battery Enclosure



Product Position Chart for the Following Models:

Altronix Products	Mounting
ACM8, ACM8CB, ACMS8, ACMS8CB, AL300ULXB, AL400ULXB2, AL600ULXB, AL1012ULXB, AL1024ULXB2, eFlow3NB, eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB, LINQ8ACM, LINQ8ACMCB, OLS75, OLS120, OLS120D2, OLS180, OLS250	(A)
T1656, T2856	(B)
T1250, T12100, T16100, T1618100	(C)
T1618300, T2428300, T2428300220, T2428300277	(D)
T1224150, T2428175	(E)
ACM4, ACM4CB, AL175ULB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB	(F)
OLS20, SMP3, SMP5	(G)
Three Position Terminal Strip	(H)

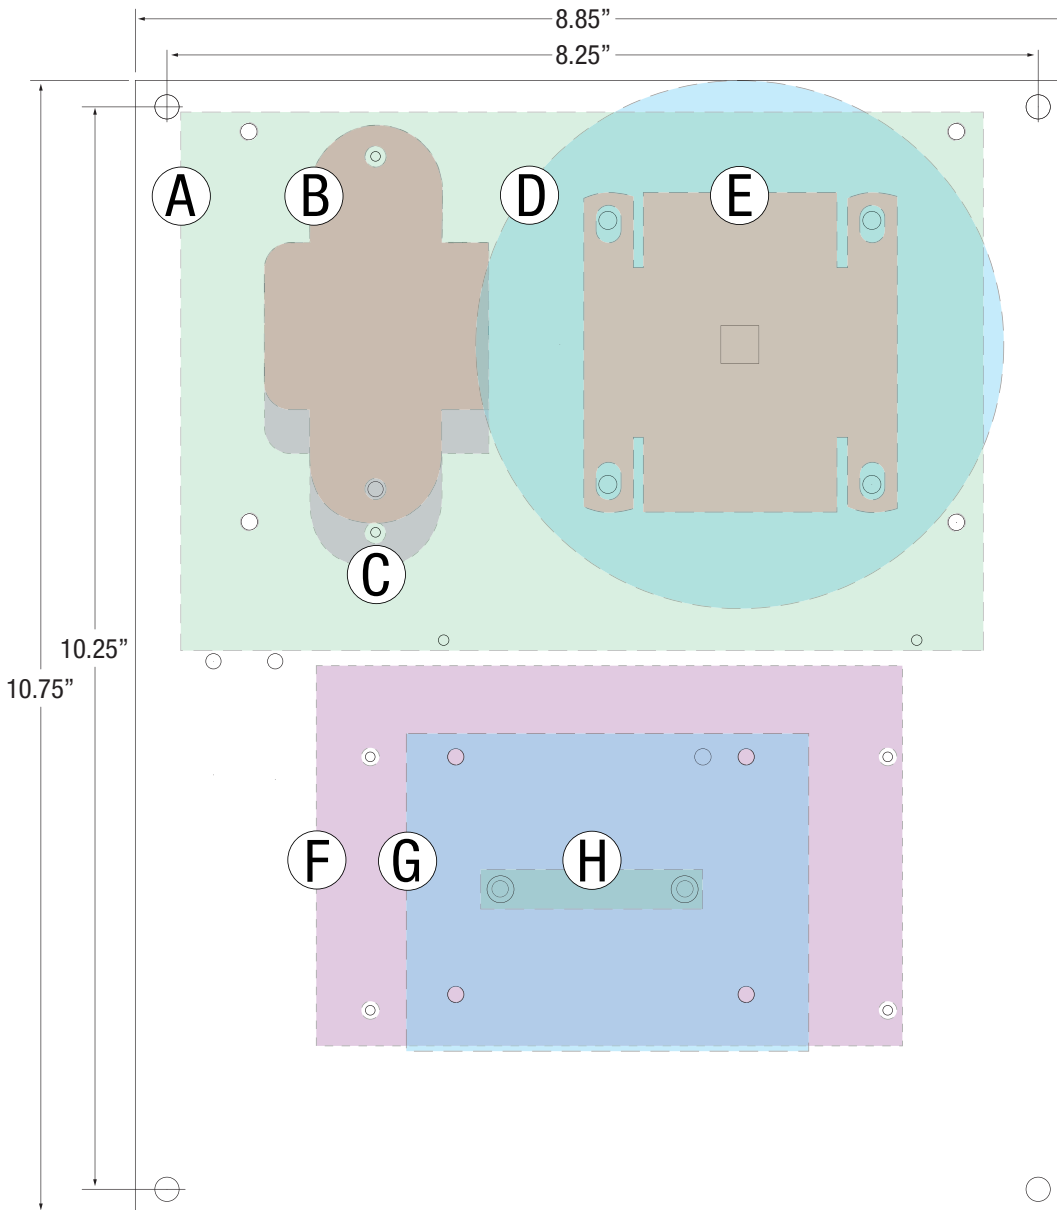

WP3
NEMA Rated
Outdoor Power Supply/Battery Enclosure



Dimensions and Drawing

Dimensions (H x W x D approximate)
 13.3" x 11.3" x 5.6" (338.1mm x 287.3mm x 142mm)

