

## DS-90xxHUI-K8 Series

### TurboHD DVR



- H.265+/H.265/H.264+/H.264 Main Stream Encoding
- Hot-Swappable HDD Support for RAID 0, RAID 1, RAID 5, RAID 6, and RAID 10
- Full Channel Recording at up to 5 MP
- HDMI1 and VGA Output up to 1920 x 1080
- HDMI2 Output up to 4K (3840 x 2160)
- Long Over-the-Coax Transmission Distance
- 8/16-ch Synchronous Playback

TurboHD DS-90xxHUI-K8 Series DVRs feature support of HD-TVI, CVBS and IP cameras on up to 16 channels. They offer long transmission distances and feature new important H.265+ compression technology, which improves recording efficiency and reduces data storage costs.

Additionally, the DS-90xxHUI-K8 Series DVRs support advanced analytics such as line crossing, intrusion, scene change detection, people counting, heat map functionality, and Video Quality Diagnostics (VQD).


**Available models:** DS-9008HUI-K8, DS-9016HUI-K8

# Specifications

	DS-9008HUI-K8	DS-9016HUI-K8
<b>Video / Audio Input</b>		
Video Compression	H.265+ / H.265 / H.264+ / H.264	
Analog Video Input	8-ch	16-ch
HDTVI Input	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection 5 MP, 4 MP, 3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60	
AHD Input	720p25, 720p30, 1080p25, 1080p30	
HDCVI Input	720p25, 720p30, 1080p25, 1080p30	
CVBS Input	Supported	
IP Video Input	10-ch (up to 18-ch) Up to 12 MP resolution Supports H.265+ / H.265 / H.264+ / H.264 IP cameras	18-ch (up to 32-ch)
Network Bandwidth	260 Mbps	320 Mbps
Audio Compression	6.711u	
Audio Input	8-ch	16-ch
	RCA [2.0 Vp-p, 1 KΩ]	
<b>Video / Audio Output</b>		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
HDMI1 / VGA	1-ch, 1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz	
HDMI2 Output	1-ch, 4K [3840 × 2160] / 30 Hz, 2K [2560 × 1440] / 60 Hz, 1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz	
Video Loop	Supported	
Encoding Resolution	5 MP / 4 MP / 3 MP / 1080p / 720p / WD1 / 4CIF / VGA / CIF	
Frame Rate	Main stream: 5 MP @ 12 fps; 4 MP @ 15 fps; 3 MP @ 18 fps; 1080p / 720p / WD1 / 4CIF / VGA / CIF @ 25 fps (P) / 30 fps (N) Sub-stream: WD1 / 4CIF / CIF @ 25 fps (P) / 30 fps (N)	
Video Bit Rate	32 Kbps to 6 Mbps	
Audio Output	2-ch, RCA [Linear, 1 KΩ]	
Audio Bit Rate	64 Kbps	
Dual Stream	Supported	
Stream Type	Video, Video and Audio	
Synchronous Playback	8-ch	16-ch
<b>Network Management</b>		
Remote Connections	128	
Network Protocols	TCP / IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP	
<b>Hard Disk</b>		
SATA	8 SATA interfaces	
eSATA	Supported	
Capacity	Up to 8 TB capacity for each disk	
<b>External Interface</b>		
Two-way audio input	1-ch, RCA [2.0 Vp-p, 1 KΩ] (independent)	
Network Interface	2, RJ45 10M/100M/1000M self-adaptive Ethernet interface	
USB Interface	Front panel: 2 × USB 2.0; rear panel: 1 × USB 3.0	
Serial Interface	RS-232, RS-485 (full-duplex), Keyboard	
Alarm In / Out	16/8	
<b>General</b>		
Power Supply	100 to 240 VAC	
Consumption (without HDD)	≤ 45 W	≤ 65 W
Working Temperature	14° F to 131° F [-10° C to 55° C]	
Working Humidity	10 to 90 %	
Dimensions (W x D x H)	17.5" x 18.5" x 3.5" [445 mm x 470 mm x 90 mm]	
Weight (without HDD)	≤ 17.6 lb [8 kg]	

## Physical Interfaces

### DS-9016HUI-K8

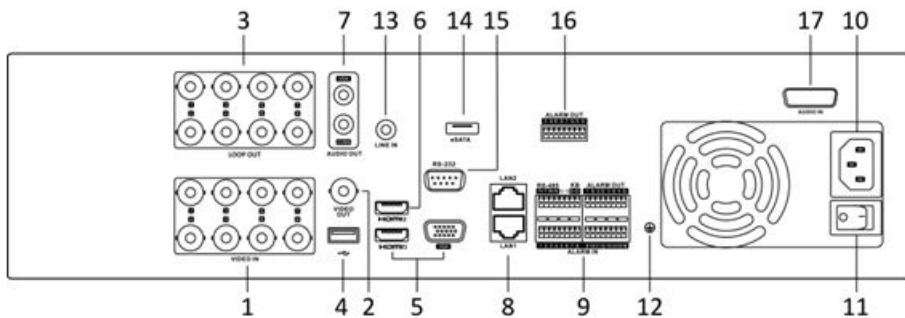

**Note:** The DS-9016HUI-K8 rear panel provides 16 video input interfaces

1.	Video In	10.	100 to 240 VAC
2.	Video Out	11.	Power Switch
3.	Loop Out	12.	GND
4.	USB Interface	13.	Line In
5.	HDMI1/VGA Interface	14.	eSATA Interface
6.	HDMI2 Interface	15.	RS-232 Serial Interface
7.	CVBS Audio Out and VGA Audio Out	16.	Alarm Out
8.	LAN1 and LAN2 Network Interface	17.	Audio In
9.	RS-485 Serial Interface, Keyboard Interface, Alarm In and Alarm Out		