

ISOProx® II Card

125 kHz Proximity

ISO-thin, imageable proximity access card • I386



ACCESS reliability.

Application

The RF-programmable ISOProx® II proximity access card offers proximity technology and photo identification on a single access control card.


Features

- ▶ Offers universal compatibility with all HID proximity readers.
- ▶ Provides an external number for easy identification and control.
- ▶ Custom pre-printed artwork available.
- ▶ Supports formats up to 85 bits, with over 137 billion codes.
- ▶ Meets ISO standards for thickness; use with all direct image or thermal transfer printers.
- ▶ Accepts either a horizontal or vertical slot punch.
- ▶ Using HID's ProxProgrammer™, card vendors can ship graphics-quality proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

Features

Specifications

Proven, Reliable Technology	Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
Thin	Can be carried with credit cards in a wallet or purse. Use with a strap and clip as a photo ID badge.
Photo ID Compatible	Print directly to the card with a direct image or thermal transfer printer. Slot punch vertically or horizontally for easy use.
Cross-reference	A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
Security	Offers over 137 billion unique codes.
Long Life	Passive, no-battery design allows for an infinite number of reads.
Durability	Strong, flexible and resistant to cracking and breaking.
Custom Artwork	Custom multicolor graphics and text are available. Note: custom graphics may increase overall card thickness.
Warranty	Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).

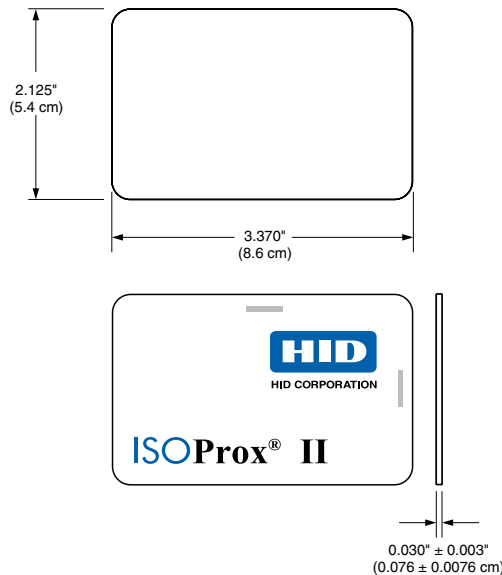

Typical Maximum* Read Range

ProxPoint® Plus reader-up to 2.5" (6.25 cm)
MiniProx® reader-up to 5" (12.5 cm)
ThinLine II® reader-up to 5" (12.5 cm)
ProxPro® reader-up to 7" (17.5 cm)
ProxPro® II reader-up to 8" (20 cm)
Prox80™-up to 5" (12.7 cm)
MaxiProx® reader-up to 20" (50 cm)

*Dependent on local installation conditions.

Dimensions

2.125" x 3.370" x 0.030" ± 0.003" nominal
(5.4 x 8.6 x 0.076 ± 0.0076 cm)

Card Construction

Thin, flexible polyvinyl chloride (PVC) laminate.

Operating Temperature

-50° to 160° F (-45° to 70° C)

Weight

0.24 oz. (6.8 g)

Part Number

Base Part No.: 1386

Description


RF-programmable, 125 kHz, customer-specified ID numbers, locations marked for horizontal and vertical slot punch

Options

- External card numbering (inkjet or laser engraving)
- Slot punch (horizontal or vertical)
- Custom artwork (text or graphics)

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007



MKT-ISOPROXII_DS_EN



ACCESS experience.

hidcorp.com

HID Global Offices:

Corporate North America
9292 Jeronimo Road
Irvine, CA 92618-1905
U.S.A.
Phone: (800) 237-7769
Phone: (949) 598-1600
Fax: (949) 598-1690

Asia Pacific
19/F 625 King's Road
North Point
Island East
Hong Kong
Phone: +852 3160-9800
Fax: +852 3160-4809

Latin America
Circunvalacion Ote. #201 B
Despacho 2
Col. Jardines del Moral
Leon 37160, Gto.
Mexico
Phone: +52 477 779 1492
Fax: +52 477 779 1493

Europe, Middle East & Africa
Homefield Road
Haverhill, Suffolk
CB9 8QP
England
Phone: +44 (0) 1440 714 850
Fax: +44 (0) 1440 714 840