

TECH SHEET

Expansion External Unit Kit **EX-DSQE**

External Unit **EX-DSME**




The **EX-DSQE** is the additional external unit kit for **HFX-7000M, HFX-7000MW, HFX-7004M, HFX-9000M** Kits.

The **EX-DSQE** is composed of:

	EX-DSME	EXTERNAL UNIT	<ul style="list-style-type: none">• Die-cast aluminium faceplate• Wide-angle colour camera• Single LED for nighttime lighting• 4 Mechanical push buttons to set from 1 to 4 call buttons using DIP-switches• Indicator LED for: call sent, lock-release enabled, audio enabled system engaged• Adjustment of speaker volume• Adjustment of audio balance• Power supply from bus line
	1405	VIDEO SPLITTER FOR ADDITION OF AN EXPANSION EXTERNAL UNIT	<ul style="list-style-type: none">• Audio/video switching module for 2-wire digital systems• For the connection of additional EX-DSME• Power supply from bus line• 2 DIN modules

MAXIMUM EXPANSION EXTERNAL UNITS FOR KITS HFX-7000M, HFX-7000MW, HFX-7004M, HFX-9000M

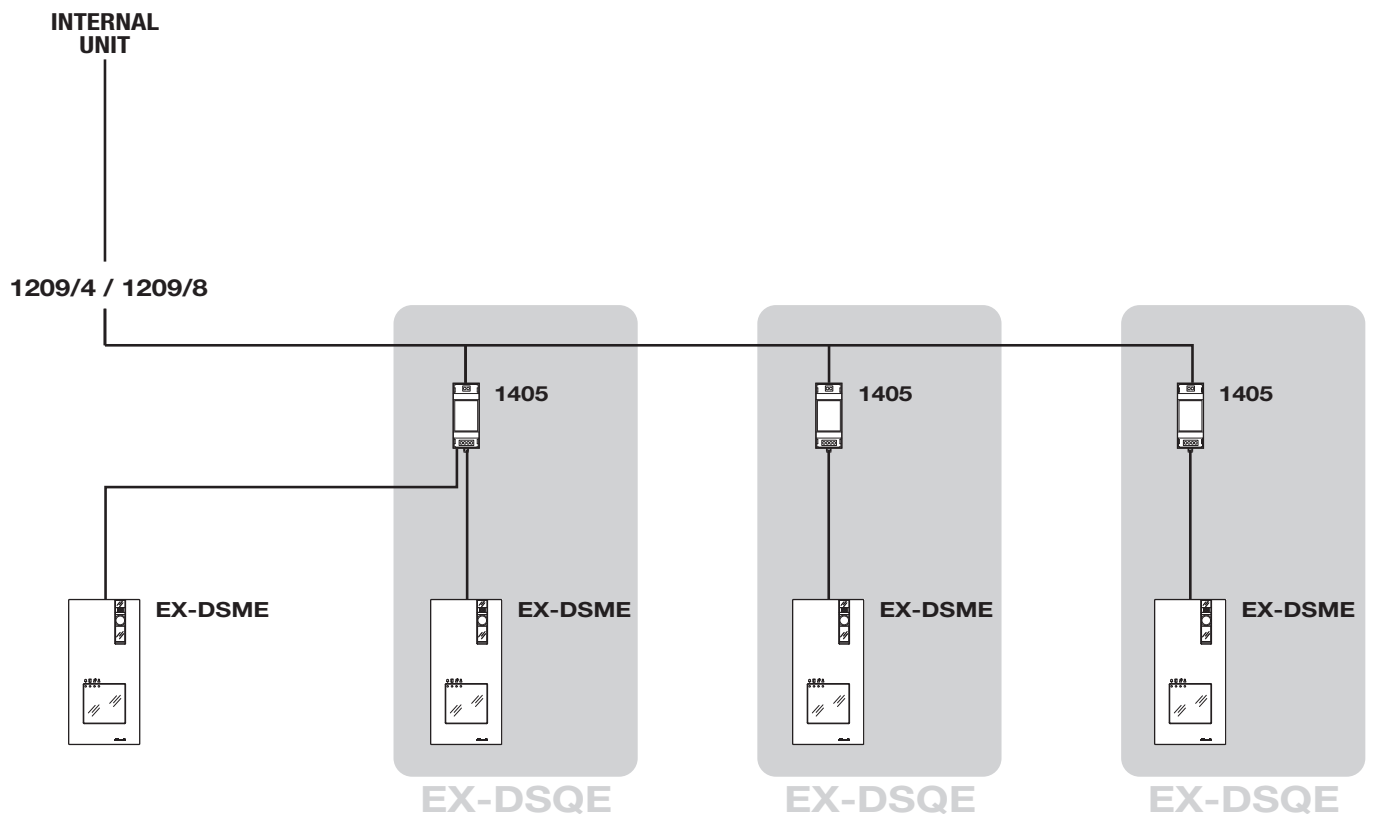

SPECIFICATIONS ART. EX-DSME

DIMENSIONS

Width	3.79 in
Height	7.72 in
Depth	1.06 in
Weight	23 oz

HARDWARE

Vandal Resistant IK	IK08
IP protection rating	IP54
Image Sensor	¼" CMOS
Resolution	600TVL - 640(H)*480(V)
Horizontal resolution (TVL)	380
Camera Lens	2.1 mm
View Angle	100° diagonal
Sensitivity (lux)	1

ENVIROMENTAL

Operating Temperature	Class A2 wide range outdoor -13°F / 131°F (-25°C / + 55°C)
------------------------------	--

ELECTRICAL SPECIFICATIONS

Maximum current absorption (mA)	250
Power consumption	8W MAX
Door release: (relay contact)	24V DC 2A
Door release: (direct current output)	1000uF-25V capacitive discharge - 12V DC-200mA holding
Compatible locks	12V AC, 12V DC

OTHER INFO

DDE function
Sensitive Touch technology
Wall-mounted

FUNCTIONS

Loudspeaker volume control	yes
Microphone volume control	yes
Buttons	1/2/4 programmable (Single user, Multi-Tenant: 2 User / 4 User)

SPECIFICATIONS ART. 1405

DIMENSIONS

Width	1.42 in
Height	3.54 in
Depth	2.28 in
Weight	7 oz


ENVIROMENTAL

Operating Temperature	23° F/104°F (-5°C/+40°C)
------------------------------	--------------------------




ELECTRICAL SPECIFICATIONS

Power consumption	0,2W
--------------------------	------

EX-DSME UNIT DIMENSIONS

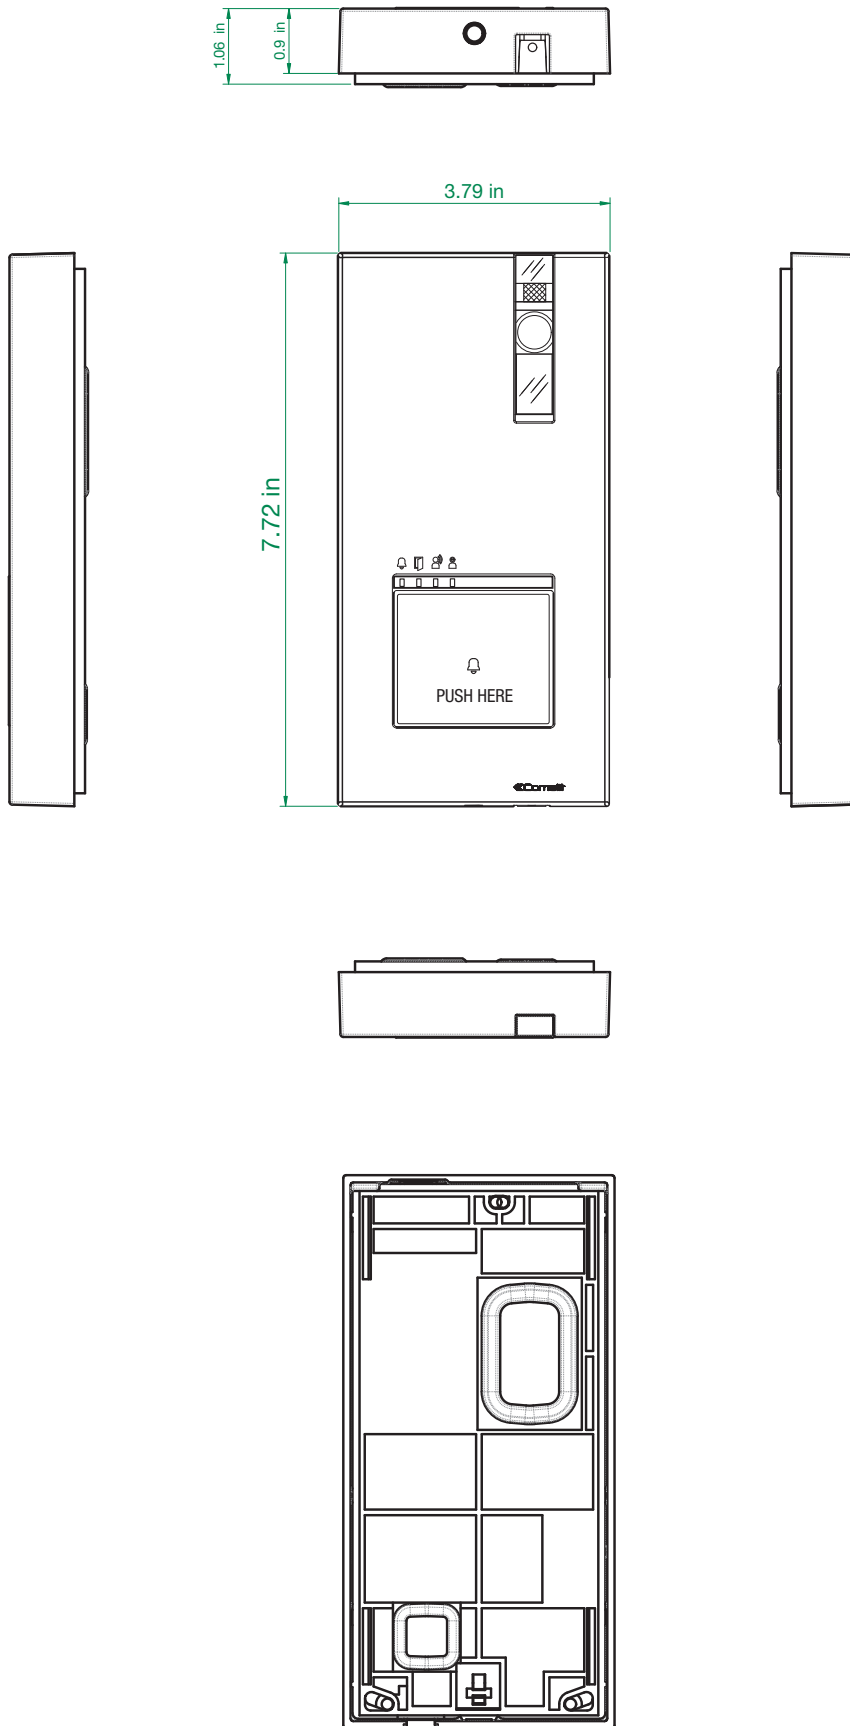

1405 UNIT DIMENSIONS

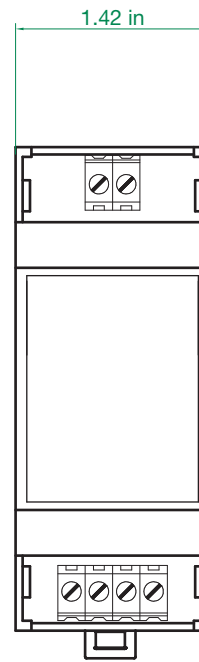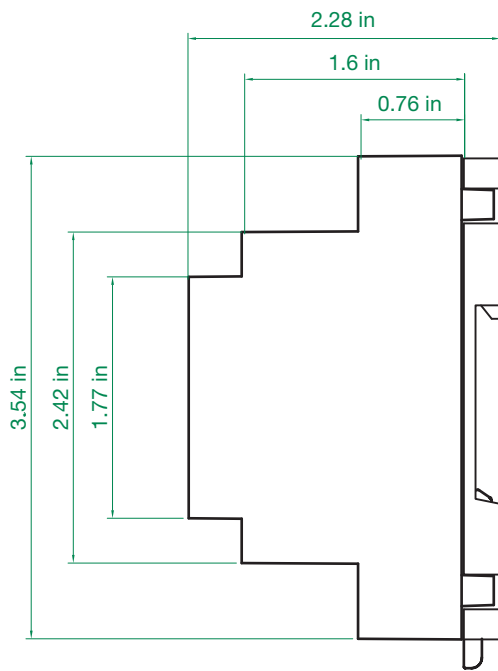

CERTIFIED MANAGEMENT SYSTEMS



www.comelitgroup.com

Via Don Arrigoni, 5 - 24020 Rovetta (BG) - Italy

Comelit®
Passion. Technology. Design.

2^a edition 02/2018
cod. 2IG4002066

