

1. SUMMARY

The Primex 66M Series Connecting Block System is used in equipment rooms or in remote and intermediate wiring closets to connect voice or data wiring to customer premise equipment.

Blocks are molded with quick-connect 66-type clips for ease of installation and proven termination reliability.

2. DIMENSIONS


SIZE: 10.0" H x 3.40" W x 1.20" W

3. FEATURES & BENEFITS

- Molded from flame retardant thermoplastic
- Standard 66-type connector clips, 4 clips x 50 rows
- A66M1-25 contains 50 rows with four connected clips in each, for a total of 25 pairs capacity
- A66M1-25 includes one 25-pair designation strip
- A66M1-50 contains 50 rows, but two separate pairs of clips in each, for a total of 50 pairs capacity
- A66M1-50 includes two 25-pair designation strips
- Requires industry-standard 66 block termination tool for punchdown

4. CONFIGURATIONS


Part #	Part Name	Description
135-0004	A66M1-25	4 x 50, 66M connecting block, 25 pair, includes 1 designation strip
135-0002	A66M1-50	4 x 50, 66M connecting block, 50 pair, includes 2 designation strips
135-0003	66M1-50-C5	4 x 50, 66M connecting block, 50 pair, with translucent clear cover marked 'CAT 5'
452-0258	031709-97	Hinged cover for 66M block, self-extinguishing plastic (sold separately)
135-0014	66MC-4	Transparent cover for 66M blocks
135-0006	A89B	66M Block Mounting Bracket
135-0016	89D	66M Block Mounting Bracket
135-0011	183A2	Double Clip 66 Block Expansion Adapter

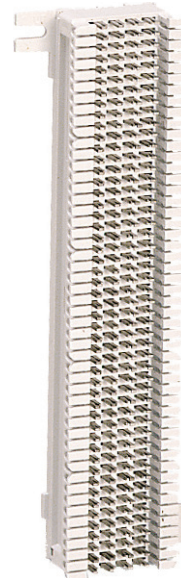


A66M1-50



031709-97



4 Clip

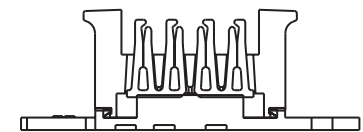

2 Clip



183A2



FOR MORE INFORMATION CONTACT:

1.604.881.7875 1.604.881.7835

www.primex.com