

ES300

Battery Powered Door Prop

The ES300 series Battery Powered Door Prop Alarm is designed for applications where doors may be used for egress or ingress, but may not be held or propped open.

Door open times from 1 second to 4 minutes (15 second default) are field selectable. The smaller size makes installation quick and easy.



Weatherized
Available

ES300 Series




FEATURES & BENEFITS

- Easy to install
- Alarm silences automatically when door is closed, no need for reset
- Reliable
- Economical
- Tamper resistant
- Field selectable timing options
- Weatherized unit available (add "W" to part number when ordering)
- UL Listed
- Mortise cylinder pre-installed. (MC65) Contact factory to order the ES300 without cylinder
- Made in the U.S.A.

DSI[®]
DESIGNED SECURITY, INC.
A Detex Company

1402 Hawthorne St.
Bastrop, Texas 78602
Voice: 1-800-272-3555
Fax: 1-512-321-9181
E-mail: dsi@dsigo.com
www.dsigo.com

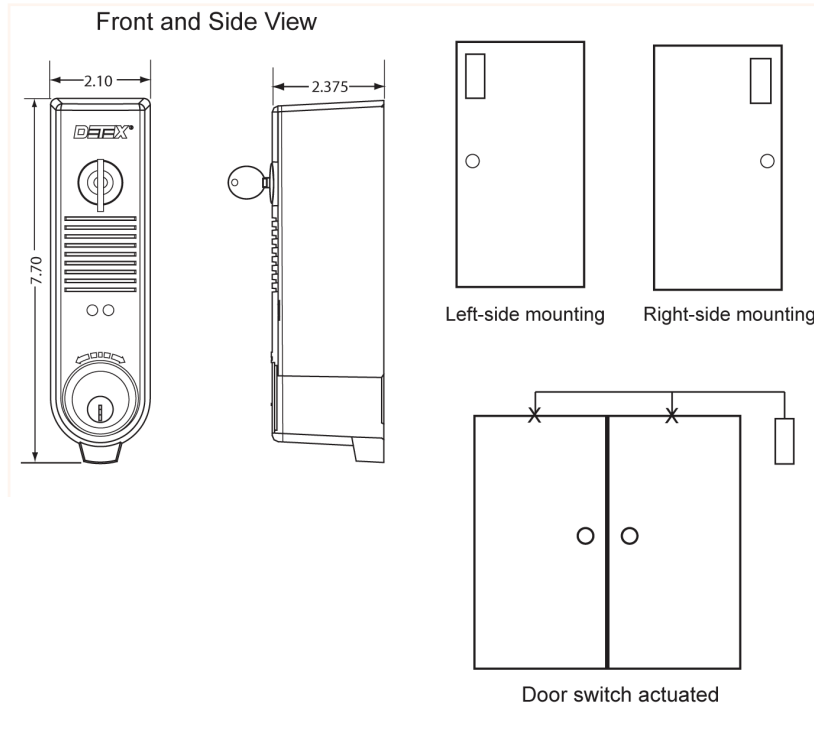

ELECTRICAL SPECIFICATIONS

Power:	9VDC battery operated, with low battery alert
Local control:	Key switch for reset/bypass
Control input:	Intelligent circuit senses the external magnet location Automatically and sets the correct door hand
Delay time:	1 second, 15 seconds, 30 seconds, 45 seconds, 1 minute, 2 minutes and 4 minutes
Sound level:	100 dB

MECHANICAL SPECIFICATIONS

Mounting:	ES300:	Gate, wall, or door mounted
	ES300 xMC65:	Gate, wall, or door mounted
	ES300W:	Gate or door mounted weatherized
	ES300W xMC65:	Gate or door mounted weatherized
Dimensions:	ES300	2.10" w x 7.70" h x 2.375" d
Key switch:	ES300:	Mortise hardware without cylinder
	ES300W:	Mortise hardware without cylinder
	ES300 xMC65:	Mortise hardware with cylinder
	ES300W xMC65:	Mortise hardware with cylinder
Finish:	Grey	

Note: Weatherized models do not have an external door switch input.

PRODUCT DESCRIPTION

The ES300 is a low-cost solution that is ideal for low risk emergency exit only doors, such as doors leading to stockroom from sales floor, stairwell doors, and various internal doors at healthcare and educational facilities. Featuring field selectable door open times from 1 second to 4 minutes, the ES300 helps prevent secure doors from being propped open to avoid a security breach in the access control system.

DSI[®]
DESIGNED SECURITY, INC.
 A Detex Company

1402 Hawthorne St.
Bastrop, Texas 78602
Voice: 1-800-272-3555
Fax: 1-512-321-9181
E-mail: dsi@dsigo.com
www.dsigo.com