



# DS794Z and ZX794Z Series Long Range PIR Detectors

www.boschsecurity.com



**BOSCH**  
Invented for life

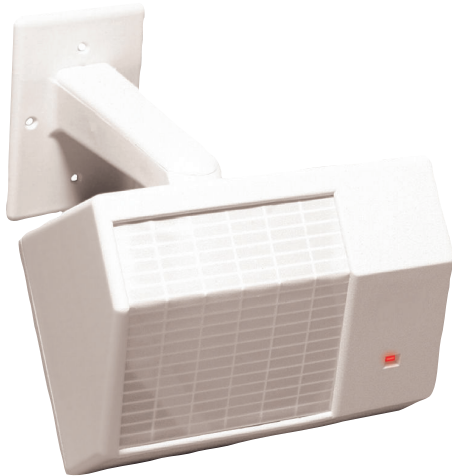

- ▶ Motion Analyzer II processing
- ▶ Motion Monitor
- ▶ PIR supervision
- ▶ Self test supervision systems
- ▶ Field-replaceable optics

The surface or corner mount, long-range DS794Z and ZX794Z Series PIR Detectors use Motion Analyzer II signal processing to reduce false alarms. Several unique test features, including Motion Monitor, provide coverage integrity. Field replaceable mirrored optics and three different coverage patterns provide installation flexibility.

## Functions

### Signal Processing

Motion Analyzer II uses multiple thresholds and timing windows to analyze timing, amplitude, duration, and polarity of signals to make an alarm decision. It will not alarm on extreme levels of thermal and illumination disturbances caused by heaters and air conditioners, hot and cold drafts, sunlight, lightning, and moving headlights. Three sensitivity settings are provided.

### Test Features

External visible alarm LED flashes to indicate trouble condition. Internal Noise Voltage Test Pins provide precise pattern location and background disturbance

evaluation using a standard analog meter. Internal sounder output for use with Sonalert® sounder (not supplied).

### Motion Monitor

Switch-selectable four and thirty day timers verify that there is a clear view of the protection area.

### PIR Supervision


Provides trouble output in the event that PIR circuitry fails.

## Certifications and approvals

Europe DS794ZE complies with EN50131-1, Grade 2

Region	Certification	
Europe	CE	DS794Z
USA	UL	ANSR: Intrusion Detection Units (UL639) DS794Z
	UL	ANSR: Intrusion Detection Units (UL639) ZX794Z
China	CCC	DS794ZE: 2007031901000035


**Installation/configuration notes**

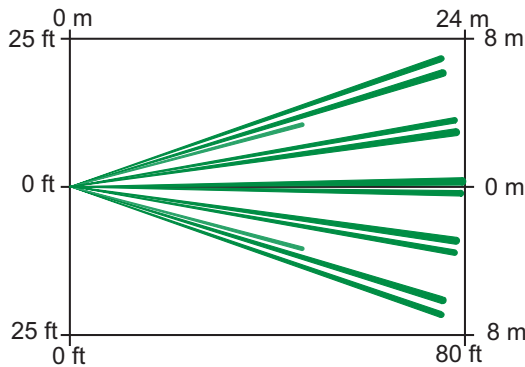

**Top View**  
Standard Broad Coverage: 24 m x 16 m (80 ft x 50 ft)




**Side View**  
Standard Broad Coverage: 24 m x 16 m (80 ft x 50 ft)



**Top View**  
Standard Long Range: 61 m x 3 m (200 ft x 10 ft)



**Side View**  
Standard Long Range: 61 m x 3 m (200 ft x 10 ft)

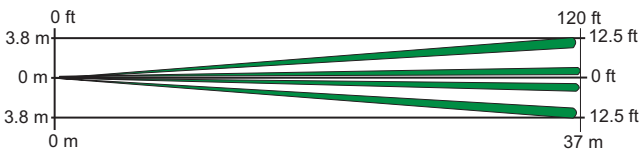

**Top View**  
Optional Long Range 37 m x 8 m (120 ft x 26 ft)



**Side View**  
Optional Long Range 37 m x 8 m (120 ft x 26 ft)

**Standby Power**

If there is no internal standby battery, connect to DC power source capable of supplying standby power if the primary power fails.

Model	Standby Power	mAh required per hour
DS794Z	No standby battery	18 mAh
DS794ZE	No standby battery	25 mAh
DS794ZE-FRA	No standby battery	18 mAh
ZX794Z	Provided by the Zonex bus	0.5 mAh

**i Notice**  
A minimum of four hours of standby power is required for UL Listed requirements.

**Parts included**

For your convenience, the OA200 Mirror and OA80 Mirror are included with the detector.

**Technical specifications**

**Enclosure**

Dimensions:	14 cm x 21 cm x 14 cm (5 in. x 7.5 in. x 5 in.)
Material:	High impact ABS plastic enclosure

**Environmental Considerations**

Operating Temperature:	-29°C to +49°C (-20°F to +120°F) <i>For UL Certified installations, 0°C to +49°C (+32°F to +120°F)</i>
Radio Frequency Interference (RFI) Immunity:	No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m.
DS794ZE:	Complies with Environmental Class II (EN50130-5)

**Mounting**

Height:	5 m (15 ft.) maximum
Location:	Surface or corner

**Power Requirements**

Current Draw:	18 mA at 12 VDC 25 mA at 12 VDC (DS794ZE)
Voltage (Input):	6 VDC to 15 VDC ZX794Z: Power comes from two-wire Zonex Bus. <0.5 mA nominal, 2 mA in alarm with LEDs enabled. Do not leave Walk Test LEDs enabled.

**Outputs**

Alarm:	ZX794Z: Signal through POPIT data bus.  DS794ZE-FRA: Form C Contacts rated at 3.0 W, 125 mA at 28 VDC for resistive loads protected by a 4.7 Ω resistor in the common C leg.
--------	--

**Tamper:** Normally-closed (with cover in place). Contacts rated at 28 VDC, 125 mA maximum.

ZX794Z: Signal through POPIT data bus. Signaled as Missing.

**Trouble:** Solid state output, shorts to negative when activated. Maximum current load is 25 mA.

ZX794Z: Signal through POPIT data bus.

#### Trademarks

Sonalert® is a registered trademark of Mallory Sonalert® Products, Inc.

#### Ordering information

##### **DS794Z Long-Range PIR Intrusion Detector**

Provides PIR, three coverage patterns, and 61 m x 3 m (200 ft x 10 ft) long range coverage.

Order number **DS794Z**

##### **DS794ZE Long-Range PIR Intrusion Detector**

Provides Motion Analyzer II processing, Motion Monitor, and three coverage patterns, and 61 m x 3 m (200 ft x 10 ft) long range coverage.

Order number **DS794ZE**

##### **DS794ZE-FRA Long-Range PIR Intrusion Detector**

For use in France. Provides Motion Analyzer II processing, Motion Monitor, and three coverage patterns, and 61 m x 3 m (200 ft x 10 ft) long range coverage.

Order number **DS794ZE-FRA**

##### **ZX794Z Long-Range PIR Intrusion Detector**

Includes an internal POPIT. Provides Motion Analyzer II processing, Motion Monitor, and three coverage patterns, and 61 m x 3 m (200 ft x 10 ft) long range coverage.

Order number **ZX794Z**

#### Accessories

##### **OA120-2 Mirror**

A 36.5 m (120 ft) optical array module. Shipped in packages of two.

Order number **OA120-2**

##### **TC6000 Test Cord**

Test cord for connecting a compatible detector's test pins to a voltmeter. It is 4.6 m (15 ft) long.

Order number **TC6000**

#### Represented by:

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia