

PowerLite® L730U Full HD WUXGA Long-throw Laser Projector

Projector

Business



Bring captivating signage to campuses, retail spaces and beyond.

3-Chip 3LCD image quality — with up to 7,000 lumens of equal Color and White Brightness¹ for vibrant, rich color

Full HD WUXGA support — native WUXGA 1920 x 1200 resolution for true-to-life images; accepts 4K signal

Breakthrough laser technology — features a virtually maintenance-free 20,000-hour laser light source²

Flexible projection — lightweight, easy-to-install design; can display images from 50" to 500" diagonal in 16:10 or ultra wide 16:6 to cover a large wall with bold, beautiful images

Simplified installation — horizontal and vertical lens shift; geometric correction tools such as point, arc correction, built-in edge blending, Quick Corner® and 360-degree flexibility make installation easy

Integrated wireless networking with enterprise-level security — additionally you can connect with Miracast®, which supports software-free, peer-to-peer wireless connectivity; screen sharing for remote collaboration

Custom brightness and constant brightness modes — to maximize light source life and provide a consistent brightness level

Easily programmable with the built-in media-player and content creation app³ — which includes templates, effects, color filters and customizable options; playlist and playback function allows for seamless content management directly or via the network



Specifications

Projection System RGB liquid crystal shutter projection system
Projection Method Front/rear/ceiling mount
LCD Size 0.67-inch (C2fine)
Driving Method Poly-silicon TFT Active Matrix
Pixel Number 2,304,000 dots (1920 x 1200) x 3
Native Resolution 1920 x 1200 (WUXGA)
Resize 640 x 480, 800 x 600, 1280 x 1024, 1400 x 1050
Aspect Ratio Supports 16:10
Pixel Arrangement Cross stripe
Color Brightness¹ Color Light Output: 7,000 lumens
White Brightness¹ White Light Output: 7,000 lumens
Contrast Ratio 2,500,000:1
Brightness Uniformity (typical) 86%
Color Reproduction Up to 1.07 billion colors
Size (projected distance) 50" – 500"
Projected Distance 80" screen 2.33 – 3.78 m
Lens Shift Vertical: ±50%; horizontal: ±20%
Keystone Correction Vertical: ±30 degrees; horizontal: ±30 degrees
Illumination Technology Laser Diode
Light Source Life² Normal: 20,000 hours; Quiet: 20,000 hours; Extended: 30,000 hours

Projection Lens

Type Optical Zoom (Manual)/Focus (Manual)
F-number 1.5 – 1.7
Focal Length 20.0 mm – 31.8 mm
Zoom Ratio Optical zoom 1 – 1.6x
Throw Ratio Range 1.35 – 2.20
Lens Cover Lens cap (without string)

Wireless Specifications


Frequency Type (Modulations) 802.11b/g/n (2.4GHz)
Supported Security Type Quick Mode: OPEN, WPA2-PSK; Advanced Mode: WPA2/WPA3-PSK, WPA2/WPA3-EAP

Other Features

Operating Temperature 32° to 113 °F (0° to 45 °C)
Power Supply Voltage 100 – 240 V ±10%, 50/60 Hz AC
Power Consumption
 358 W (Normal Mode)
 267 W (Quiet and Extended)
 2.0 W Standby (Communication on)
 0.3 W Standby (Communication off)
Fan Noise 38 dB (Normal Mode); max. 27 dB (ECO Mode)
Security Security cable hole, lens lock, Kensington lock provision
A/V Mute Yes
Speaker(s) 10 W (mono)
Screen Mirroring Yes
Split Screen Yes
Content Playback Yes
Quick Corner Yes
Arc Correction Yes
Edge Blending Yes
Screen Sharing Yes

Interfaces

HDMI x 2
 HDMI Out x 1
 VGA x 2
 Monitor Out: Mini D-Sub 15 pin x 1
 HDBaseT x 1
 Audio in: Mini Stereo x 2
 Variable audio out: Mini Stereo x 1
 USB connector Type-B x 1
 USB connector Type-A x 1
 Serial: RS-232c x 1
 Wired LAN RJ-45 x 1
 Wireless LAN Built-in

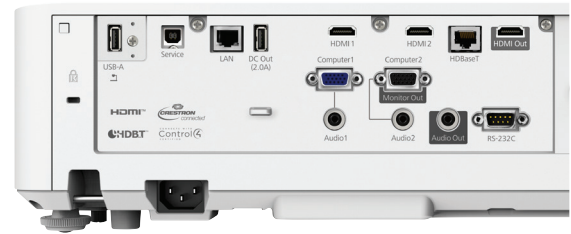

Effective Scanning Frequency Range (Analog)

Pixel Clock 13.5 MHz – 162 MHz (up to UXGA 60 Hz)
Horizontal 15 kHz – 92 kHz
Vertical 50 Hz – 85 Hz

Effective Scanning Frequency Range (Digital)

Pixel Clock 13.5 MHz to 297 MHz
Horizontal 15 kHz to 135 kHz
Vertical 23.98 / 24 / 25 / 29.97 / 30 / 50 / 59.94 / 60 Hz

Dimensions (W x D x H)

Excluding Feet 17.32" x 11.97" x 4.80"
Including Feet 17.32" x 12.59" x 5.35"
Weight 18.5 lb

Remote Control

Features Power, source search selection, test pattern selection, AV mute, freeze, user ID, auto, aspect, color mode, number, page up and down, E-zoom, volume, help, menu, enter, esc and pointer functions
Operating Angle Front Right/Left ±60 degrees; Upper/Lower: +30 to -20 degrees
Operating Angle Rear Right/Left ±30 degrees; Upper/Lower: +50 to +10 degrees
Operating Distance 26 ft

Eco Features

RoHS compliant
 Recyclable product⁴
 Epson America, Inc. is a SmartWay[®] Transport Partner⁵

Support

Epson ConnectionSM
 Pre-sales support U.S. and Canada 800-463-7766
 Internet website www.epson.com

Service Programs

The projector has a limited warranty of 3 years. Epson Road Service program with free Next-Business-Day replacement⁶, PrivateLine[®] dedicated toll-free support (U.S. and Canada only)

What's in the Box

PowerLite L730U projector, power cable, computer cable (HDMI), projector remote control with batteries, Quick Setup Sheet, cable cover

Ordering Information

PowerLite L730U	V11HA25020
Replacement air filter (ELPAF56)	V13H134A56
Ceiling Mount (Universal) ELPMBPJG	V12H808001
Custom Micro-Adjustable Projector Mount (ELPMBPRH)	V12H809001
HDBaseT transmitter (ELPHD01)	V12H547020
Wireless LAN module (ELPAP11)	V12H005A02
External Speaker (ELPSP02)	
Document Camera DC-07, DC-13, DC-21	
1-year extended service plan	EPPEXPE1
2-year extended service plan	EPPEXPE2

1 Color brightness (color light output) and white brightness (white light output) will vary depending on usage conditions. Color light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118. | 2 No required maintenance for the light source for up to 20,000 hours. Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m³ of particulate matter. Time varies depending on usage conditions and environment. Replacement of parts other than the light source may be required in a shorter period. | 3 Internet connection required for download. Data usage fee may apply. | 4 For convenient and reasonable recycling options, visit www.epson.com/recycle | 5 SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency. | 6 Expedited shipping not available in all areas. Road Service orders must be in by 3 p.m. Eastern Time for Next-Business-Day delivery.

Better Products for a Better Future[™]
eco.epson.com



Epson America, Inc.
 3131 Katella Ave., Los Alamitos, CA 90720

Epson Canada Limited
 185 Renfrew Drive, Markham, Ontario L3R 6G3

www.epson.com
www.epson.ca

EPSON, EasyMP, PowerLite and Quick Corner are registered trademarks, EPSON Exceed Your Vision is a registered logomark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. PrivateLine is a registered trademark, and Epson Connection is a service mark of Epson America, Inc. Miracast[®] is a registered trademark of Wi-Fi Alliance. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Epson disclaims any and all rights in these marks. Copyright 2021 Epson America, Inc. CPD-60899 5/21

