


EZN1250

2-Megapixel IR & WDR,
Outdoor Bullet Network Camera



ONVIF

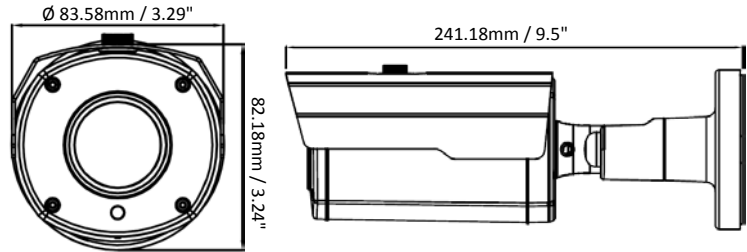

Features

- 2MP Progressive scan CMOS sensor
- Equipped with 2.8~12mm motorized lens
- Multi-streaming from H.265 / H.264
- Supports D-WDR
- Provides True Day/Night functionality with automatic IR filter operation
- Extended IR range up to 40m / 131ft. with 30 LEDs (depends on scene IR reflectivity)
- Supports video analytics
- Supports ONVIF (V17.06, Profile S, Profile G)
- Weather-proof IP66 rated
- Supports micro SD card (up to 128GB)
- Supports live monitoring via mobile Apps (iOS & Android)
- Supports PoE and 12VDC

Optional Accessories

| Model | BA-EACM | BA-EACJ | BA-EACB | BA-EACI | BA-EACA | BA-EACN |
|-------------------|--|------------------------------|------------------------------|------------------------------|--------------------------------|------------------------------|
| Image | | | | | | |
| Size (Φ x H) | 100.5 x 77mm / 3.96" x 3.03" | 134 x 77.5mm / 5.28" x 3.05" | 146.7 x 79mm / 5.78" x 3.11" | 134 x 57.5mm / 5.28" x 2.26" | 146.7 x 59mm / 5.78" x 2.32" | 100.5 x 57mm / 3.96" x 2.24" |
| Bracket / Adaptor | BA-EACF Bracket Holder 27cm / 10.63" | BA-EABZA Bracket | | BA-EAPZA Pole Adaptor | BA-EACZA Corner Adaptor | - |



IP Sidekick - ESK1000

The product can assign an IP address to the camera, and then you can connect and check the IP camera live view using our mobile app EF Sidekick.

EverFocus PoE Switch

5 Ports: ES0501-40
8 Ports: ES0812-31 / ES0802-41
16 Ports: ES1625-31 / ES1645-51
24 Ports: ES2426-31 / ES2446-51 / ES2448-62



Specification

| | |
|------------------------|--|
| Model No. | EZN1250 |
| Pickup Device | 2MP Progressive scan CMOS sensor |
| Lens | 2.8~12mm motorized lens |
| FOV | H: 104° ~ 31°, V: 55° ~ 18°, D: 124° ~ 36° |
| F No. | F1.6 ~ 2.9 ±5% |
| Minimum Illumination | Color: 0.1Lux @ F1.2 (AGC On); B/W: 0Lux @ IR On |
| Day/Night | True Day/Night with ICR |
| Shutter | 1/5 ~ 1/20,000s |
| Video Compression | H.265 / H.264 |
| Max. Video Resolution | 1920 x 1080 |
| Frame Rate | 25fps / 30fps |
| S/N Ratio | ≥ 50db (AGC Off) |
| AGC | Supported |
| Triple Streams | Supported |
| AWB | Supported |
| WDR | D-WDR |
| 3DNR | Supported |
| Video Output | Supported |
| Audio | Supported; 1 input / 1 output (RCA) |
| SD Card Slot | Supported; Micro SD/SDHC/SDXC slot, up to 128GB |
| Password Protection | Supported |
| Alarm Input / Output | Supported; 1 input / 1 output |
| Reset Button | Supported |
| Interface | RJ-45 10M/100M x 1 |
| Supported Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP |
| Connector | DC Jack, RJ-45 |
| Image Settings | Flip, Rotate, Hallway, Saturation, Brightness, Contrast, Hue, Sharpness |
| Video Analytics | Perimeter Intrusion Detection, Line Crossing Detection, Foreign/Missing Object Detection |
| Event Trigger | Motion, I/O, Intelligent |
| Notification | Email Notification |
| IR LED | 30 units (SMD) |
| IR Distance | 40m / 131ft. |
| Power Supply | 12VDC |
| Power over Ethernet | PoE IEEE802.3af (Class 3) |
| Max. Power Consumption | 12VDC ≤7W / PoE 8.64W |
| Humidity | ≤95% not condensing |
| Operating Temperature | -30°C ~ 55°C / -22°F ~ 131°F |
| Dimensions (Φ) x (D) | 83.58 x 241.18mm / 3.29" x 9.5" |
| Weight | 805g / 1.8lb |
| Weather Resistance | IP66 |
| Vandal Resistance | Not supported |
| Certificates | CE, FCC, RoHS |

Find Out More At:

EverFocus Taiwan HQ:
 TEL: +886 2 26622338
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus USA - California:
 TEL: +1 626 844 8888
www.everfocus.com
sales@everfocus.com

International Branch Offices:
 China, Japan

