


## Cable Clips

Pre-installed nails provide fast and easy installation for either a single cable, 2-3 cables, or 1 bundled cable.


Size	Part No.	Standard Bag Quantity	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs.)
1/4"	SC14CC	1 ea. (Equals one bag of 100 Clips)	10 Bags of 100	2.23
1/2"	SC12CC	1 ea. (Equals one bag of 25 Clips)	10 Bags of 25	2.31
3/4"	SC34CC	1 ea. (Equals one bag of 10 Clips)	20 Bags of 10	2.96

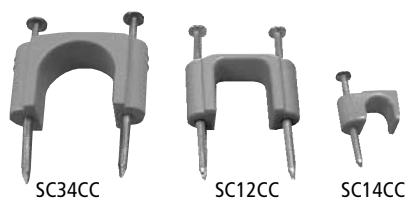

## Conduit Clamps

Designed to secure Resi-Gard raceway or bundled cable.

Size	Part No.	Standard Bag Quantity	Std. Ctn. Qty.	Std. Ctn. Wt. (lbs.)
3/4"	SCE977EC	1 ea. (Equals one bag of 5 Clamps)	20 Bags of 5	1.5
1"	SCE977FC	1 ea. (Equals one bag of 5 Clamps)	12 Bags of 5	1.3
1 1/4"	SCE977GC	1 ea. (Equals one bag of 5 Clamps)	8 Bags of 5	1.1
1 1/2"	SCE977HC	1 ea. (Equals one bag of 5 Clamps)	6 Bags of 5	1.0
2"	SCE977JC	1 ea. (Equals one bag of 5 Clamps)	6 Bags of 5	1.5

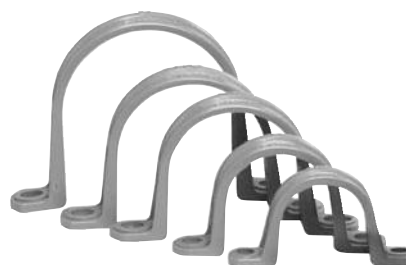

NOTE: Each clamp requires 2 screws, 2 nuts, and/or 2 bolts

## Resi-Gard® Solvent Cement

Recommended pipe application and sizes	Set-up time (Evaporation Rate)	Recommended installation temperature	Lap Shear @ 73°F	Viscosity at 75° as manufactured
For use with Resi-Gard®, Riser-Gard®, P&C Flex®, and Carlon PVC fittings. <b>Up through 6" diameter.</b>	10°–30°F Use extra caution 30°–50°F 5-6 minutes 50°–70°F 3-4 minutes 70°–90°F 1-2 minutes	40° to 100°F	2 hrs. 350 psi 16 hrs. 800 psi 72 hrs. 1,500 psi	500-900 cps

Part No	Size	Applicator	Description	Ctn. Qty.	Ctn. Wt. (lbs.)
VC9963SC	Pint	Brush	Resi-Gard® Solvent Cement Clear	24	28.0

Meets ASTM D-2564



## Resi-Gard® Cutters

Ideal for fast, smooth field cuts for up to 1" diameter Resi-Gard nonmetallic flexible raceway. The large PVC Cutter is ideal for cuts up to 2" diameter nonmetallic rigid and flexible raceway.

### Small Cutter

For fast, smooth field cuts of 1/2" through 1" innerduct.



Part No.	Size	Std. Ctn. Qty.
CC120B	8"	10

### Large Cutter

For clean cuts of conduit 1/2" through 2".



Part No.	Size	Std. Ctn. Qty.
CC122	17 1/2"	1