
96 Pair 110 Patch Panel CAT 6

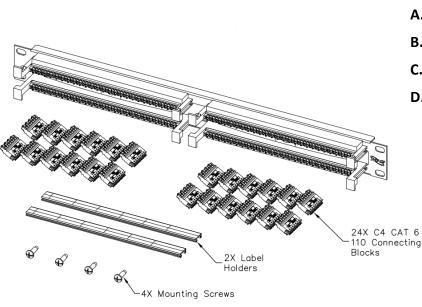

Package Includes:

- A. 110 Blank Patch Panel, 1 PC
- B. 4-Pair 110 Connecting Block, 24 PCS
- **C.** Label Holders, 2 PCS
- D. #12-24 x 5/8" Pan Head, Pilot Point Machine Screw, 4 PCS


Features and Benefits

- Rack mounted reinforced steel panel with two 50-pair 110 blocks.
- Designed to support CAT 6 commercial or residential applications.
- Backwards compatible with CAT 5e wiring solutions.
- Ideal for data and voice applications.
- Designed with rear cable entry for flexibility.
- Compatible with all standard 19" racks and cabinets.
- 1 rack mount space (RMS).
- Compatible with ICC's ICACSPDT4P 4-pair punch down tool and IC110TC450 termination caps.
- ANSI/TIA-568-C and UL 1863 compliant
- Country Of Origin: Taiwan
- TAA Compliant

Part No: IC110PRK61 Rev: B Page 1 of 2



© Copyright 2018, ICC. This document and the designs, specifications and information contained herein are the property of ICC. Reproduction, modification, alteration or unauthorized use without ICC's approval is strictly prohibited. ICC and the ICC logo are registered trade name and trademark of ICC. All rights reserved.

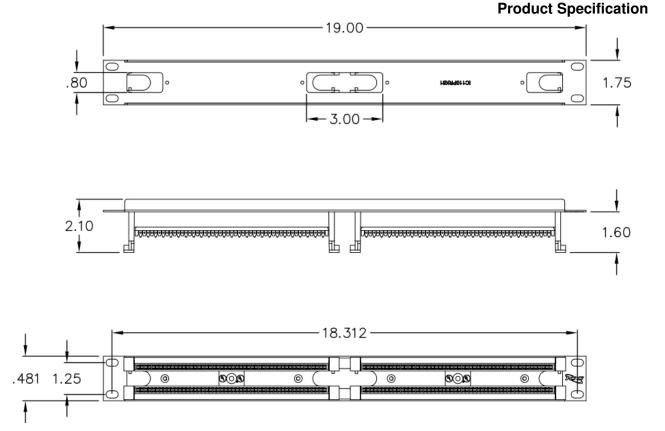

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. 110 BLANK PATCH PANEL:
 - A. MATERIAL: 16 GA CRS
 - B. SURFACE FINISHING: BLACK POWER COAT
- 2. 50 PAIR 110 BLOCK
 - A. MATERIAL: PC, UL 94V-0
 - B. COLOR: IVORY

CATEGORY 6 CONNECTING HARDWARE REQUIREMENTS												
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100	200	250
NEXT LOSS (db)	75.0	75.0	75.0	74.0	69.9	68.0	66.0	64.1	58.1	54.0	48.0	46.0
FEXT LOSS (db)	75.0	71.1	65.0	63.1	59.0	57.1	55.1	53.2	47.2	43.1	37.1	35.1
RETURN LOSS (db)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	28.1	24.0	18.0	16.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.16	0.20	0.28	0.32

ORANGE BROWN BLUE GREEN .20 101(110)(110)(110 CATEGORY 6+ Ħ Part No: IC110PRK61 L

NOTE: 110 CONNECTING BLOCK

- 1. 4 PAIR CONNECTING BLOCK:
 - A. HOUSING: PC, UL94V-0
 - B. IDC PHOSPHOR BRONZE ALLOY PLATED WITH **100 MICRON TIN PLATED**
 - C. MECHANICAL:
 - i. NUMBER OF TERMINATIONS ≥ 200
 - ii. GAUGE: 22-24 AWG
 - iii. WIRE: SOLID

Rev: B Page 2 of 2

888-ASK-4ICC icc.com csr@icc.com



© Copyright 2018, ICC. This document and the designs, specifications and information contained herein are the property of ICC. Reproduction, modification, alteration or unauthorized use without ICC's approval is strictly prohibited. ICC and the ICC logo are registered trade name and trademark of ICC. All rights reserved.

.24

.652