


2 Port Surface Mount Box With 8P8C CAT 5e EZ Jack

Package Includes:


- A. Surface Mount Box Cover, 1 PC
- B. Surface Mount Box Base, 1 PC
- C. 8P8C Cat 5e Jack, 2 PCS
- D. Double Sided Adhesive Strip, 1 PC
- E. #6 x 3/4" Pan Head, Sharp Point Tapping Screw, 2 PCS

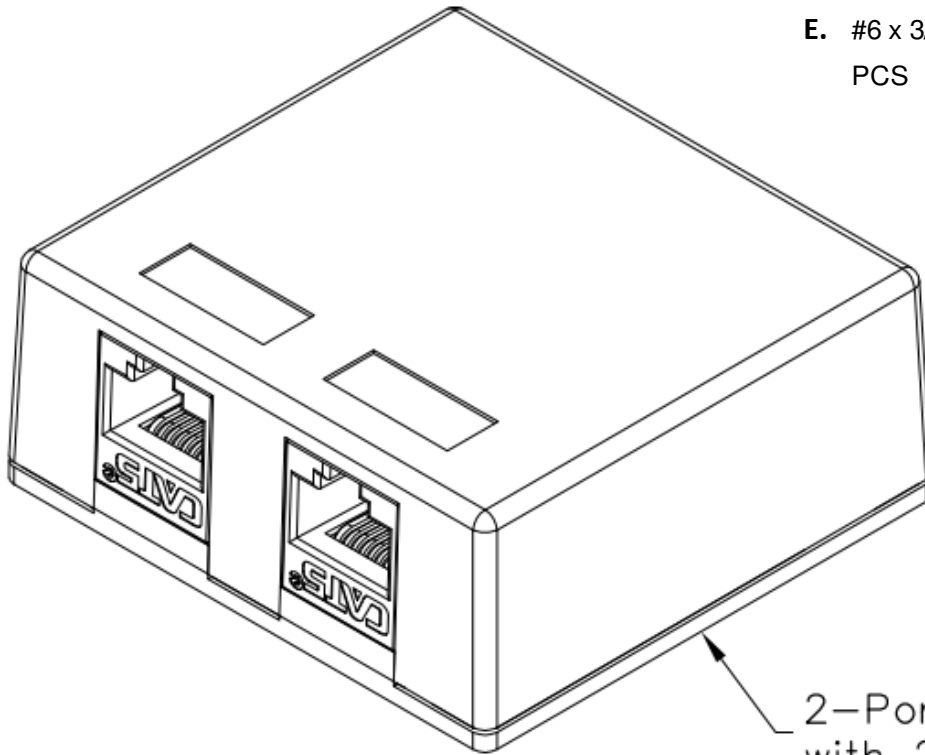

2-Port Surface Mount Box
with 2 CAT 5e Data Jack

Features and Benefits

- Provides a clean modular surface mount outlet solution of voice, data, and other communication needs to the work area for commercial or residential applications
- Multiple mounting options including adhesive backing and screws
- Recessed area for ID label
- Rugged and durable construction
- Available in ivory and white
- Country Of Origin: Taiwan
- TAA Compliant

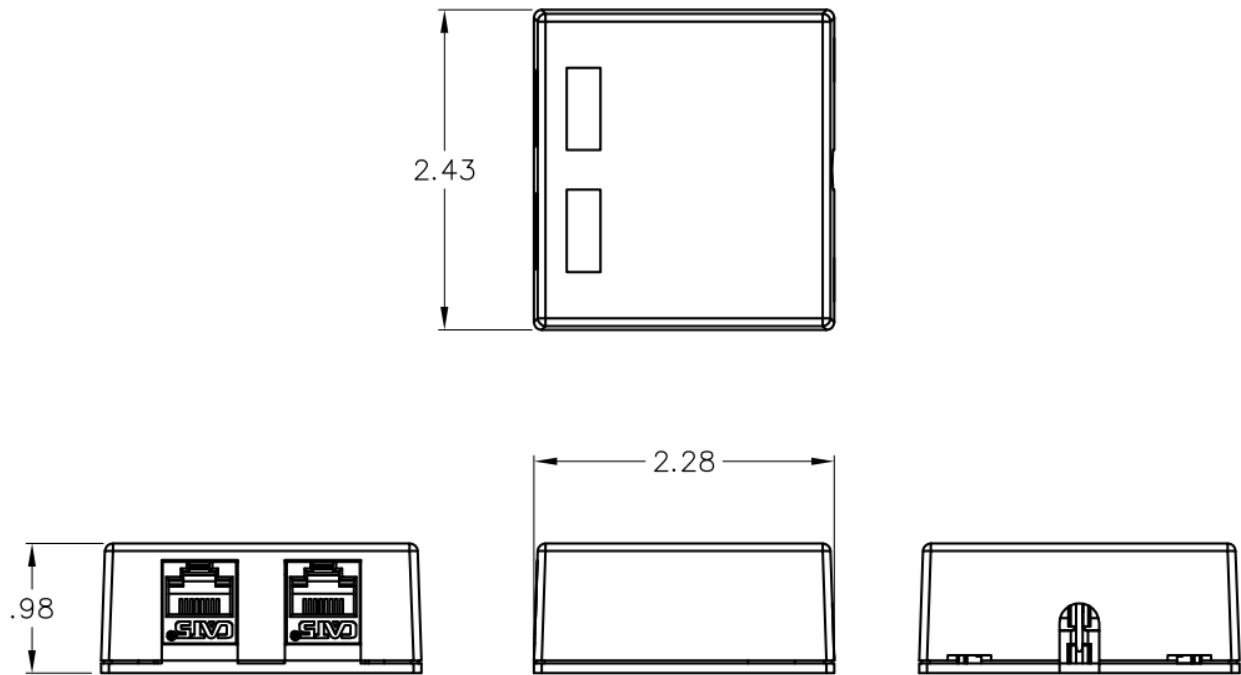

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
 - A. SURFACE MOUNT BOX: ABS, UL 94V-0
 - B. CAT 5E MODULE: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
2. COLOR: XX: IV-IVORY, WH-WHITE
3. CAT 5E MODULE:
 - A. ELECTRICAL:
 - i. CURRENT RATING: 1.5 AMPS
 - ii. INSULATION RESISTANCE: 500 MOHMS MIN
 - iii. CONTACT RESISTANCE: 20 MOHMS MAX
 - iv. SDC RESISTANCE: 0.1 OHM MAX
 - v. TRANSMISSION PERFORMANCE EXCEEDS CATEGORY 5E CONNECTING HARDWARE REQUIREMENTS SPECIFIED IN TIA/EIA-568-B.2 WHEN USED WITH COMPATIBLE HORIZONTAL CABLE
 - B. MECHANICAL:
 - i. PLUG INSERTION LIFE: 750 CYCLES MIN
 - ii. PLUG & JACK CONTACT FORCE: 100 GRAMS MIN USING FCC APPROVED PLUG
 - iii. PLUG RETENTION FORCE: 30 LBS MIN
 - iv. TEMPERATURE: -40° TO 150° F (-40° TO 68° C)
 - C. PHYSICALS:
 - i. JACK WIRING: 50 MICRO INCHES OF GOLD OVER 100 INCHES OF NICKEL
 - ii. CONNECTOR: INSULATION DISPLACEMENT CONNECTOR (IDC) ACCEPTS 22-24 AWG SOLID WIRE