

# ST-ST 62.5/125 $\mu$ m OM1 MM Duplex Fiber Optic Jumper




## Package Includes:

A. ST-ST 62.5/125 $\mu$ m MM Duplex Fiber Jumper, **1 Piece**

## Features and Benefits

- Made from OFNR riser rated cables, exceeding industry requirements
- Used with ICC fiber optic products
- Available in 1, 2, 3, 5, 7, and 10 meters
- Dust caps included
- 100% factory tested

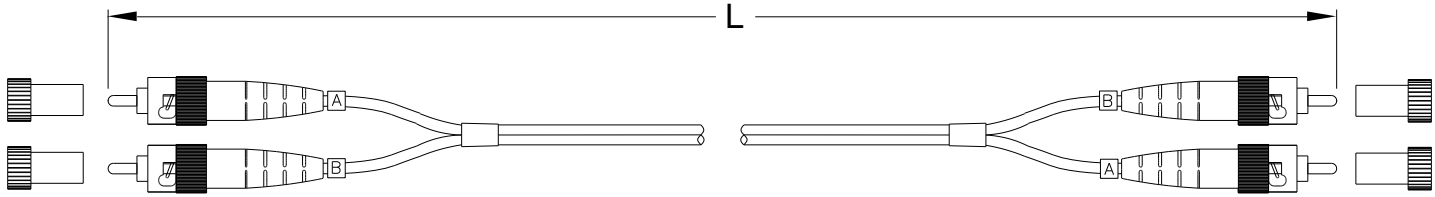

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. Cable:

- A. Color: Orange
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Multimode 62.5/125µm
- D. Attenuation: 2.9/0.6 dB/km @ 850/1300 nm
- E. Bandwidth: 220 MHz.km EMB @ 850 nm
- F. Cable Data:
  - Cable diameter: .079 in (2.0mm)
  - Weight: 12 lbs./kft
  - Bend radius: 1.2" MIN
  - Loading: 135 lbs. MAX
  - Impact cycle: 1500

ITEM NUMBER	L (LENGTH)
ICFOJ7C301	1 METER ± 10 CM
ICFOJ7C302	2 METER ± 10 CM
ICFOJ7C303	3 METER ± 10 CM
ICFOJ7C305	5 METER ± 10 CM
ICFOJ7C307	7 METER ± 10 CM
ICFOJ7C310	10 METER ± 10 CM

2. ST Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. Reflection: N/A

3. Compliance:

- A. ANSI/TIA-568-C.3

4. Length XX: 01, 02, 03, 05, 07, 10