

# SC-ST 9/125 $\mu$ m OS1 SM Duplex Fiber Optic Jumper




## Package Includes:

- A. SC-ST 9/125 $\mu$ m OS1 SM Duplex Fiber Jumper, **1 Piece**

## Features and Benefits

- Made from OFNR riser rated cables, exceeding industry requirements
- Used with ICC fiber optic products
- Available in 1, 2, 3, 5, 7, and 10 meters
- Made with Corning® ClearCurve® glass, Bend-insensitive multimode fiber (BIMMF)
- Dust caps included
- 100% factory tested

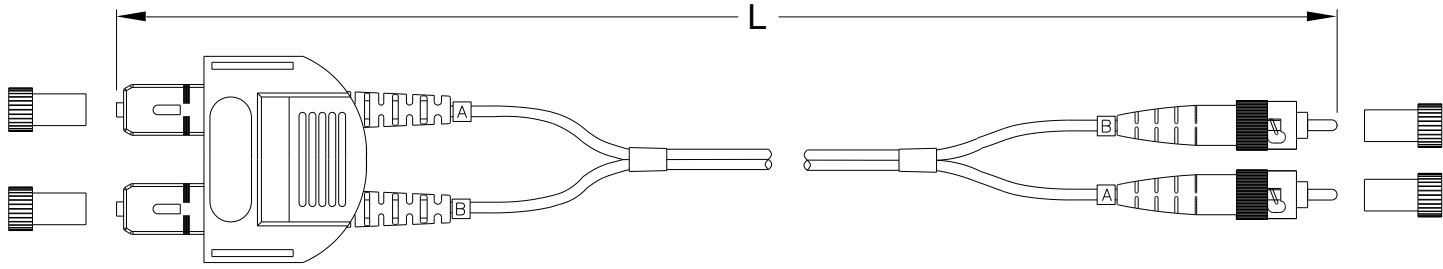

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. Cable:

- A. Color: Yellow
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Singlemode 9/125µm
- D. Attenuation: 0.35/0.20 dB/km @ 1310/1550 nm
- E. Cable Data:
  - Cable diameter: .079 in (2.0mm)
  - Weight: 12 lbs./kft
  - Bend radius: 1.2" MIN
  - Loading: 135 lbs. MAX
  - Impact cycle: 1500

ITEM NUMBER	L (LENGTH)
ICFOJ9C501	1 METER ± 10 CM
ICFOJ9C502	2 METER ± 10 CM
ICFOJ9C503	3 METER ± 10 CM
ICFOJ9C505	5 METER ± 10 CM
ICFOJ9C507	7 METER ± 10 CM
ICFOJ9C510	10 METER ± 10 CM

2. SC Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. Return Loss: 55 dB MIN
- D. UPC Polish

3. ST Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. UPC Polish

4. Compliance:

- A. ANSI/TIA-568-C.3

5. Length XX: 01, 02, 03, 05, 07, & 10