


# 12 Port 6P6C USOC Vertical Patch Panel

## Package Includes:

- A. 12-Port 6P6C USOC Vertical Patch Panel, 1 PC
- B. 89D Mounting Bracket, 1 PC
- C. 4" Cable Tie, 3 PCS
- D. Installation Instructions, 1 Sheet

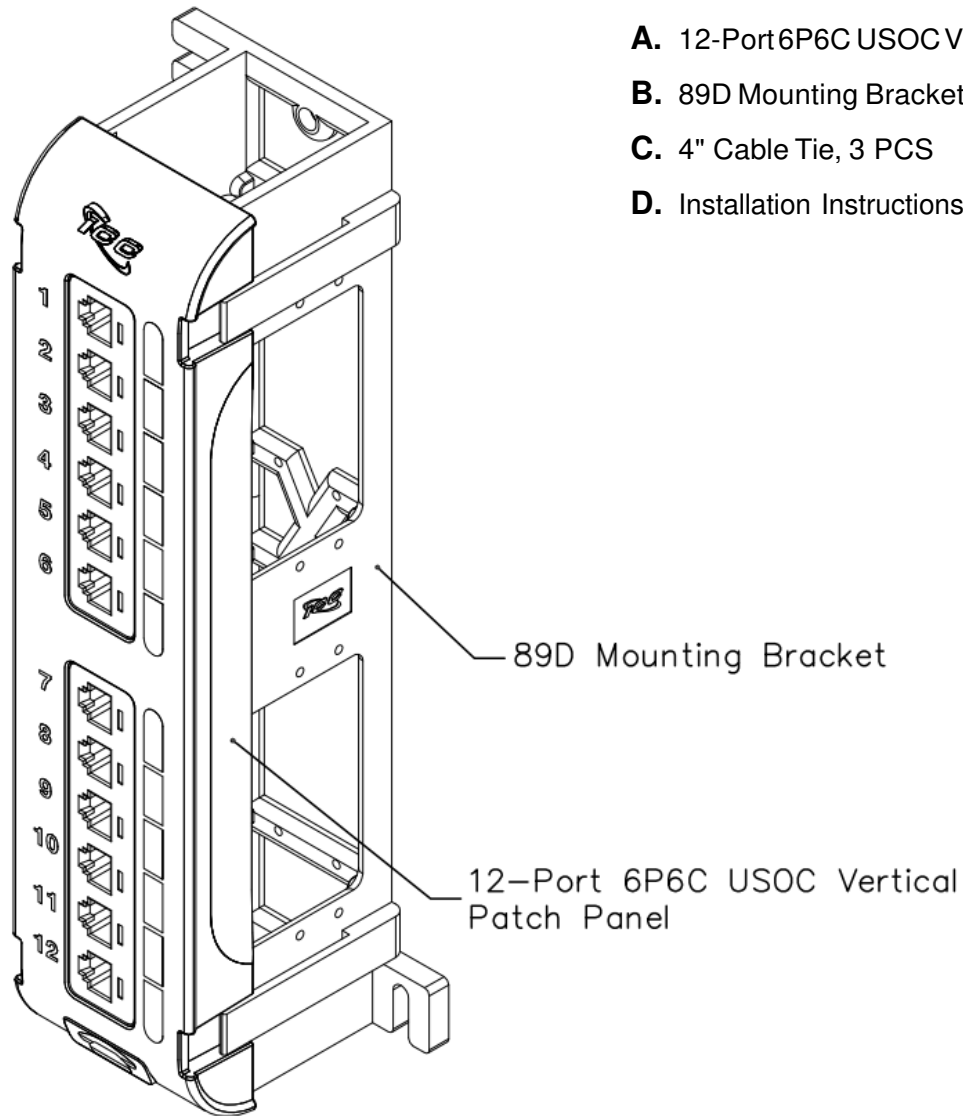


## Features and Benefits

- Wall mounted 6-position 6-conductor USOC patch panel provides voice connectivity applications
- Engineered to provide 110 IDC termination reducing installation time
- Includes color coded 110 connecting block
- Used with ICACSPDT00 110 punch down tool or ICACS04PH5
- Installation instructions #MSR-0264 included
- ANSI/TIA-568-C and UL 1863 compliant
- Country Of Origin: Taiwan
- TAA Compliant

Part No: ICMPP012U6  
 Rev: B  
 Page 1 of 2

| 888-ASK-4ICC | [icc.com](http://icc.com) | [csr@icc.com](mailto:csr@icc.com) |



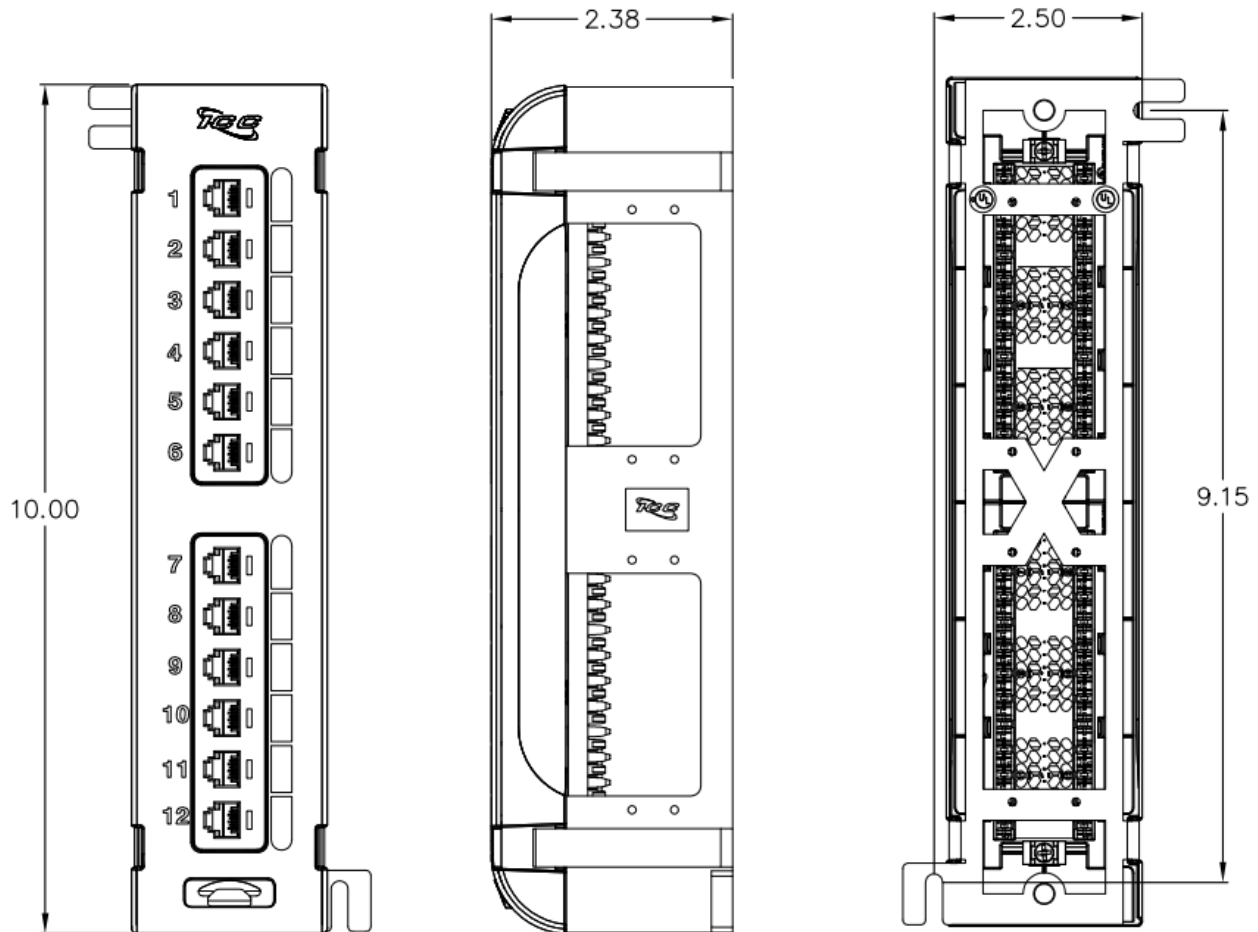

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. 12-PORT 6P6C USOC PATCH PANEL:

A. MATERIAL:

- i. PATCH PANEL HOUSING: ABS UL 94V-0
- ii. JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- iii. SPRING WIRE: PHOSPHOR BRONZE
- iv. 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
- v. GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

B. SURFACE FINISH: MATTE BLACK

C. MECHANICAL:

- i. MATING FORCE: 100 GRAMS MIN/ CONTACT TEMPERATURE RANGE: -40°-70°C
- ii. PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- iii. IDC WIRE GAUGE: 22-24 AWG

D. ELECTRICAL:

- i. CURRENT RATING: 1.5 AMP DC
- ii. CONTACT RESISTANCE: 2.5 MILOHMS MAX