

48-Port 6P6C USOC Patch Panel




Package Includes:

- A. 48-Port 6P6C USOC Patch Panel, **1 Piece**
- B. #12-24 x 5/8" Pan Head, Pilot Point Machine Screw, **8 Pieces**
- C. Installation Instructions, **1 Sheet**



Features and Benefits

- Rack mounted 6-position 6-conductor USOC patch panel provides voice connectivity applications
- Engineered to provide 110 IDC termination reducing installation time
Includes USOC and UTP wiring label
- Designed to fit all standard 19" racks and cabinets
- 1 Rack Mount Space (RMS)
- Used with 4-Pair 110 punch down tool ICACSPDT4P and ICACSPDT00 110 punch down tool
- ANSI/TIA-568-C and UL 1863 compliant
- Country of Origin: Taiwan
- TAA Compliant

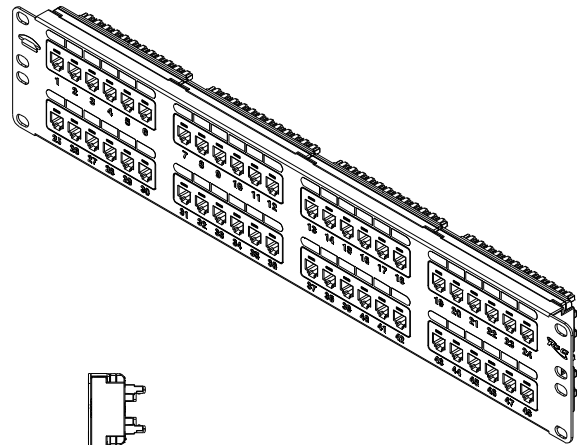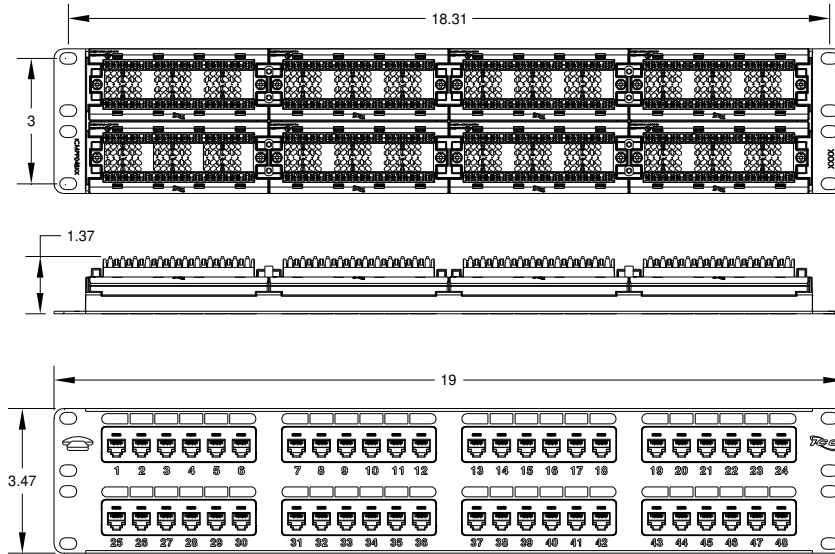

NOTE: UNLESS OTHERWISE SPECIFIED

A. Material:

- 48-Port Patch Panel: 16 GA CRS
- Jack Housing: High Impact, Flame Retardant Plastic, UL 94V-0
- Spring Wire: Phosphor Bronze
- 110 Connector: Phosphor Bronze Alloy with 100 micro-inch Alloy
- Gold Rating: 50 Micro-inches of Gold over 100 micro inches of Nickel

B. Surface Finish: Black Powder Coat

C. Mechanical:

- Mating Force: 100 Grams MIN/Contact
- Temperature Range: -40°~70°C
- Plug Retention in Jack: 50N (11 LBS SQ)
 - IDC Wire Gauge: 22~24 AWG

D. Electrical:

- Current Rating: 1.5 AMP DC
- Contact Resistance: 2.5 MILOHMS MAX

WIRING DIAGRAM:		
6P6C	110 Connector	Color
4	1	White/Blue
3	2	Blue
2	3	White/Orange
5	4	Orange
1	5	White/Green
6	6	Green