


12 Port Category 6 Front Access Patch Panel


Package Includes:

- A. 12 Port CAT 6 Patch Panel, 1 PC
- B. #12-24 x 3/4", Machine Screw, 2 PCS
- C. Cable Tie, 4 PCS
- D. Installation Instructions, 1 Sheet

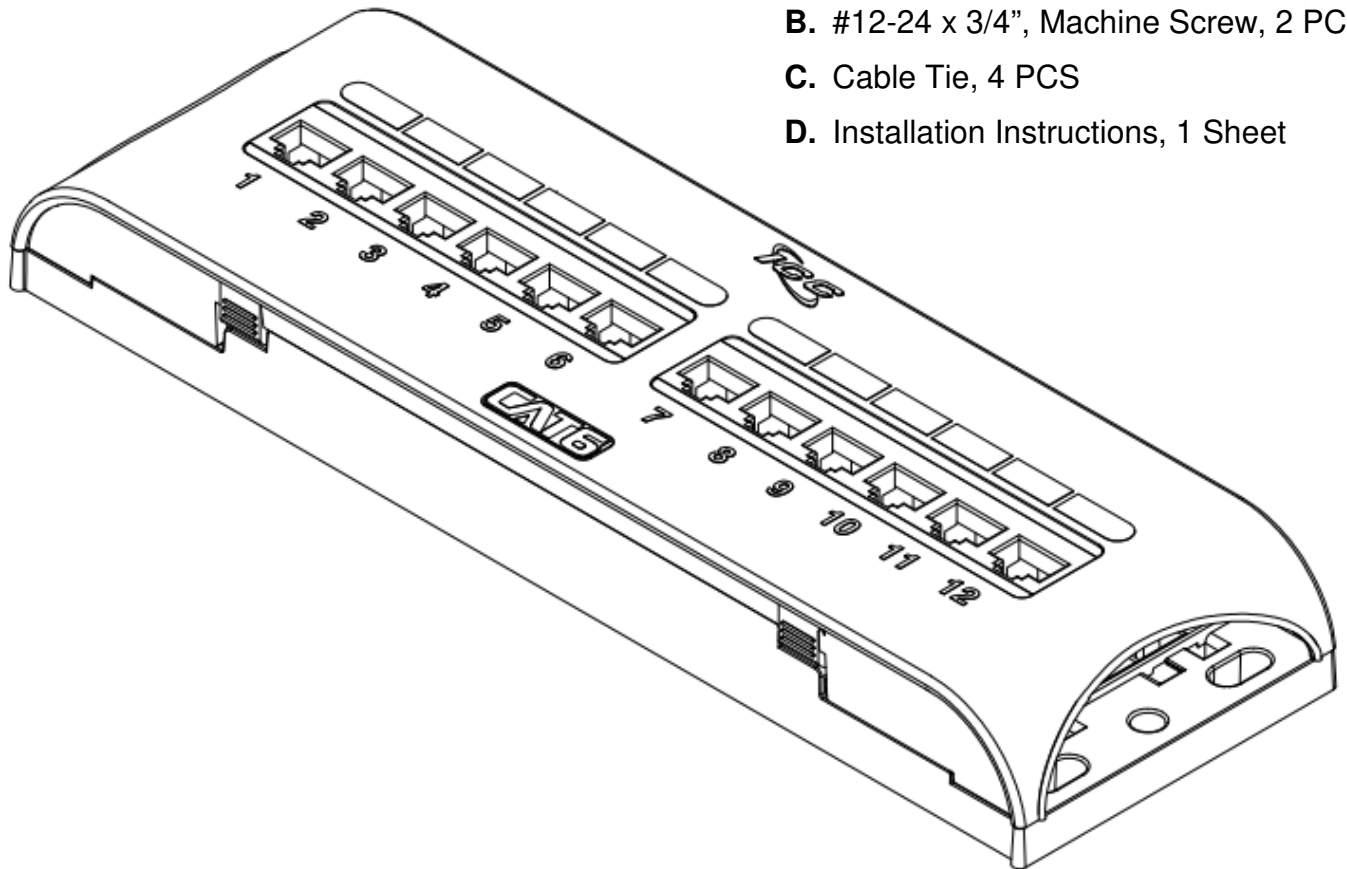

Features and Benefits

- Wall mounted CAT 6 component rated patch panel provides excellent performance for data networks requiring maximum speed and bandwidth.
- Enhances crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals.
- Exceeds TIA-568-C.2 Category 6 connecting hardware requirements.
- Engineered to provide 110 IDC termination reducing installation time.
- Used with ICPCSK CAT 6 patch, cords ICACSPDT00 110 punch down tool, and ICCMSR19XX distribution rack.
- Installation instructions.
- Country of Origin: Taiwan
- TAA Compliant

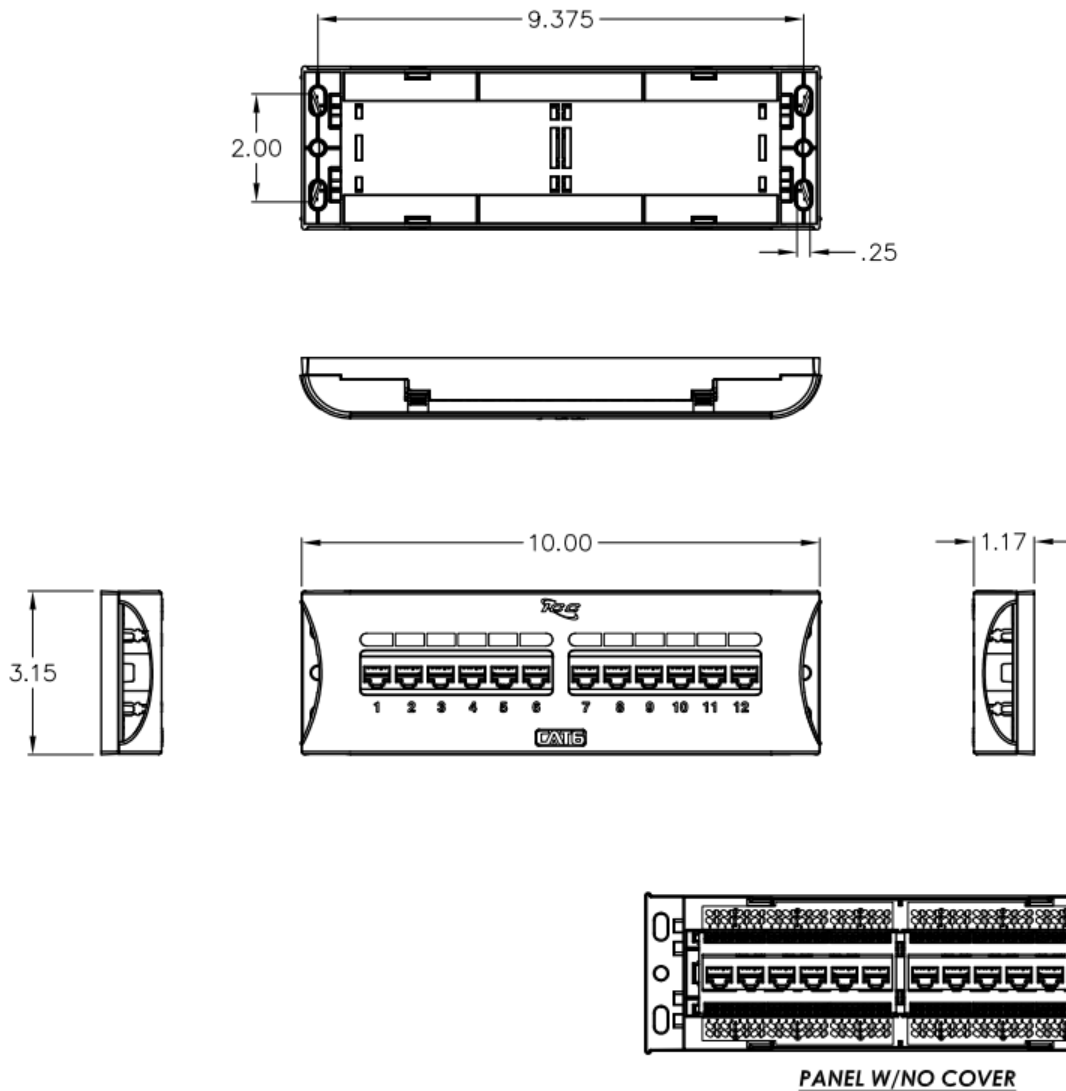

NOTE: UNLESS OTHERWISE SPECIFIED

1. 12 PORT CAT 6 PATCH PANEL:

A. MATERIAL:

- i. 12 PORT PATCH PANEL: ABS, UL 94V-0
- ii. JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- iii. SPRING WIRE: PHOSPHOR BRONZE
- iv. 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO INCH ALLOY
- v. GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

B. SURFACE FINISH: BLACK POWDER COAT

C. MECHANICAL:

- i. MATING FORCE: 100 GRAMS MIN/CONTACT TEMPERATURE RANGE: -40°-70°C
- ii. PLUG RETENTION IN JACK: 50N (11 LBS SQ)

D. ELECTRICAL:

- i. CURRENT RATING: 1.5 AMP DC
- ii. CONTACT RESISTANCE: 2.5 MILOHMS MAX