



Mini Net.Media Center[™] Voice + Video + Data


INSTALLATION INSTRUCTIONS

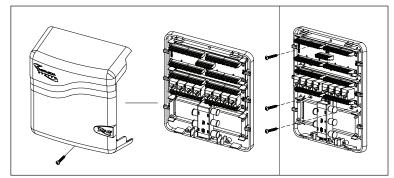


Step 1: Remove the screw to separate the cover from the base. Next, screw the base to a surface at a desirable indoor location using a minimum of 3 points.

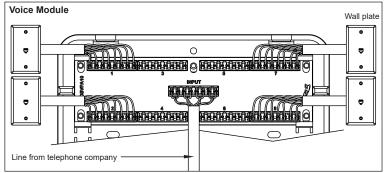

Step 3a: Terminate the incoming phone line to the 110 IDC labeled "INPUT". Identify each outlet cable and terminate to 110 IDC labeled "1~8". Note: Line #1= Blue, Line #2=Orange, Line #3=Green, Line #4= Brown.

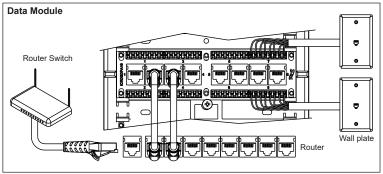


Step 3b: Terminate cables on the 4-Pair 110 connectors on the data module. Connect one end of a patch cord to the corresponding jack and the other end to the Ethernet router after identifying the port to activate.

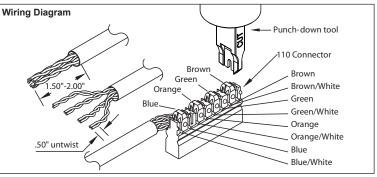



Step 2: Terminate the wires by only using a 110 punch-down tool. Be certain to follow the specified T568A color code for 8P8C installations as per TIA-570 residential wiring standards.


Malax O di d

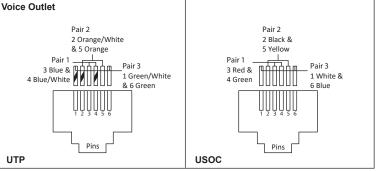

Note: Follow UTP or USOC wiring on 6P6C voice modular connectors to connect up to 3 phone lines per outlet.

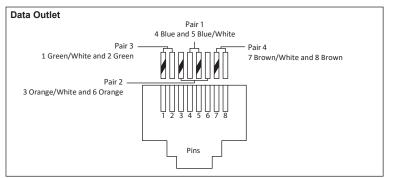




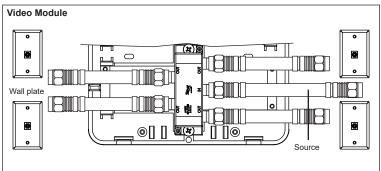

Step 3c: Attach a coaxial cable from the antenna or cable TV source to the "IN" connector on the splitter. Up to 4 TV tuners can be connected to the "OUT" connectors.

cs@icc.com icc.com



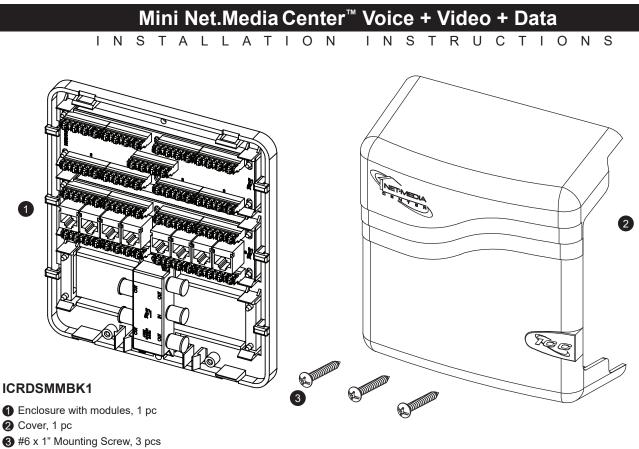


FEATURES AND BENEFITS

ACCESSO

- · Snap-on cover and base are constructed of durable ABS plastic
- 8-Port bridged voice module for connecting phones to 8 locations
- 8-Port CAT 5e data module networking up to 8 computers

0


- 1x4 CATV 2GHz splitter modules for connecting video to 4 locations
- · Compact size perfect for installing in garages, basements and bedroom closets
- Side access points are on the left and right for easy cable entry and exit



Single Blade Punch-Down Tool

ICACSPDT00

- Single wire termination
- 110 IDC and 66 blocks Both blades included
- Adjustable impact settings
- Comfortable grip



PTIONAL


CAT 5e UTP Premise Cables

ICCABR5Exx* CMR • 4-Pair, 24 AWG

- Solid copper cable
- 1000 ft., EZ pull carton

xx* denotes color = **BL**-Blue, **GY**-Gray, **GN**-Green, **WH**-White, **YL**-Yellow

cs@icc.com



RIES

Patch Cords

ICPCSJzzxx*


CAT 5e, 4-Pair UTP, 24 AWG

- Slim boots fit narrow port spacing
- UL listed

 Factory tested and compatible with T568A/B

*zz denotes length - 01, 03, 05, 07, 10, 14, 25 feet xx denotes color - BK-Black, BL-Blue, GN-Green, GY-Gray, OR-Orange, RD-Red, WH-White, YL-Yellow





110 Termination Cap, 2-Pair

IC110TC450

- · Protects wires and prevents debris
- Works with patch panels