



Product Data Sheet

IM Series: IM-12100HF2 (UT-12100HF2)


12 Volt, 10.0 Amp. Hour

Specifications

Rated Voltage	12V	
Nominal Capacity	10.0Ah	(C ₂₀ , 1.75V/cell, 20hrs)
Dimensions	Length	5.95 inches (151 mm)
	Width	2.56 inches (65 mm)
	Container Height	4.37 inches (111 mm)
	Total Height	4.61 inches (117 mm)
Approx Weight	6.77 lbs (3.07 Kg)	
Terminal	F2	
Container Material	ABS	
Rated Capacity (25°C)	10.0 Ah	(20hr, 0.500A, 1.75V/cell)
	9.46 Ah	(10hr, 0.946A, 1.75V/cell)
	8.60 Ah	(5hr, 1.72A, 1.75V/cell)
	7.65 Ah	(3hr, 2.55A, 1.75V/cell)
	6.80 Ah	(1hr, 6.80A, 1.60V/cell)
Max. Discharge Current	150A (5s)	
Internal Resistance (25°C)	Approx 18mΩ	
Operating Temp. Range	Discharge	5 ~ 122°F (-15 ~ 50°C)
	Charge	-4 ~ 104°F (-20 ~ 40°C)
	Storage	5 ~ 104°F (-15 ~ 40°C)
Nominal Operating Temp. Range	77±5°F (25±3°C)	
Standby/Float Use	Initial Charging Current less than 3.0A. Voltage	
	13.5V~13.8V at 77°F(25°C)Temp. Coefficient -10mV/°F	
Temperature Effect on Capacity	104°F (40°C)	103%
	77°F (25°C)	100%
	32°F (0°C)	86%
Self Discharge	IM series batteries may be stored for up to 6 months	
	at 77°F(25°C) and then a freshening charge is required. For higher temperatures - time interval will be shorter.	



Layout

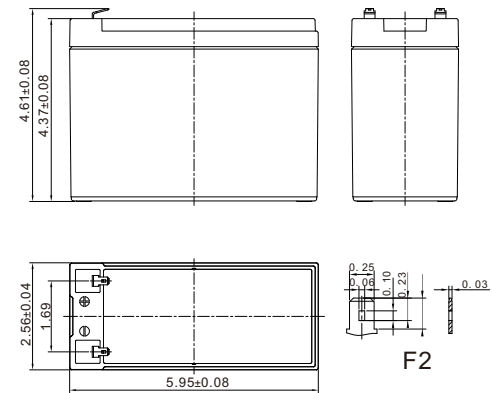

Constant Current Discharge (Amperes) at 77°F(25 °C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	34.2	22.8	17.8	14.3	10.4	7.60	6.10	4.40	3.46	2.47	1.97	1.68	1.43	1.13	0.924	0.489
1.80V/cell	36.8	24.2	18.6	14.9	10.8	7.80	6.30	4.50	3.52	2.51	2.00	1.70	1.46	1.15	0.937	0.495
1.75V/cell	38.8	25.2	19.2	15.3	11.0	7.90	6.40	4.60	3.59	2.55	2.02	1.72	1.47	1.16	0.946	0.500
1.70V/cell	40.6	26.2	19.9	15.7	11.3	8.10	6.50	4.70	3.64	2.59	2.05	1.74	1.49	1.17	0.955	0.504
1.67V/cell	42.0	26.9	20.4	16.1	11.5	8.20	6.60	4.80	3.68	2.61	2.07	1.76	1.50	1.18	0.962	0.508
1.60V/cell	44.6	28.0	21.1	16.5	11.8	8.40	6.80	4.90	3.75	2.66	2.11	1.79	1.53	1.20	0.975	0.514

C.O.V - Cutoff Voltage/cell. The battery is fully charged & being discharged to COV

Constant Power Discharge (Watts/cell) at 77°F(25 °C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	64.7	43.4	34.0	27.6	20.2	14.6	11.9	8.70	6.77	4.86	3.88	3.31	2.84	2.24	1.84	0.978
1.80V/cell	68.9	45.7	35.5	28.5	20.7	15.0	12.2	8.80	6.88	4.93	3.93	3.35	2.88	2.27	1.86	0.989
1.75V/cell	71.8	47.2	36.4	29.1	21.1	15.3	12.4	9.00	6.98	4.99	3.98	3.39	2.91	2.29	1.88	1.00
1.70V/cell	74.5	48.7	37.4	29.8	21.6	15.5	12.6	9.10	7.07	5.06	4.02	3.43	2.94	2.32	1.90	1.01
1.67V/cell	76.4	49.8	38.2	30.4	21.9	15.7	12.7	9.20	7.13	5.10	4.06	3.46	2.96	2.33	1.91	1.02
1.60V/cell	79.5	51.3	39.2	31.1	22.4	16.0	13.0	9.40	7.25	5.18	4.12	3.50	3.00	2.36	1.93	1.03

C.O.V - Cutoff Voltage/cell. The battery is fully charged & being discharged to COV



Product Data Sheet

IM Series: IM-12100HF2 (UT-12100HF2)

12 Volt, 10.0 Amp. Hour

Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

General Features


- 5 years design life(77°F)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- High purity PbCaSn raw material alloy is used for plate grids, assuring less gassing & low self-discharge rate
- High quality AGM separator: extend cycle life and prevent micro short circuit

Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in IATF16949,ISO45001, ISO 9001 and ISO 14001 certified production facilities




Discharge Characteristics

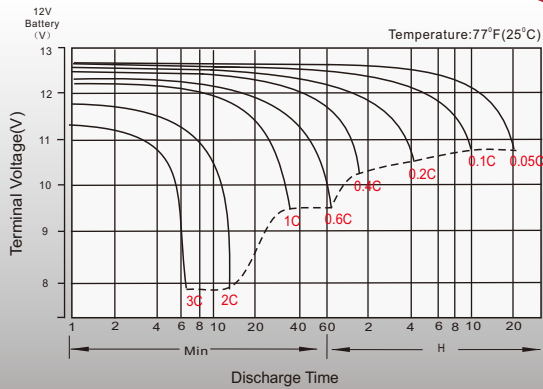


Curves represent Constant Current draw (Amp.)
1C curve = 1 x Nominal capacity = 10amp. constant draw 0.05C curve = 0.05 x Nominal capacity = 0.50amp. draw


Standby/Float Charging Characteristics

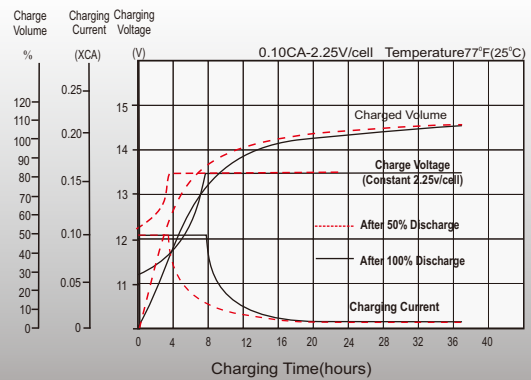

Temperature Effectes on Battery Capacity

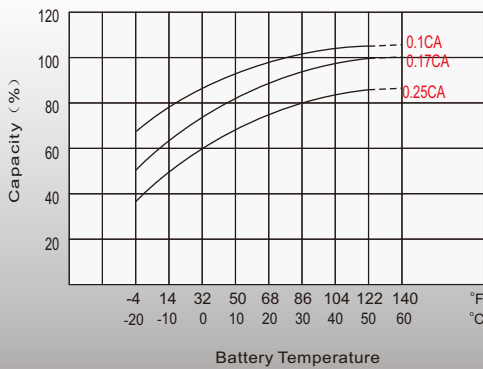

Temperature Effectes on Long Term Float Life

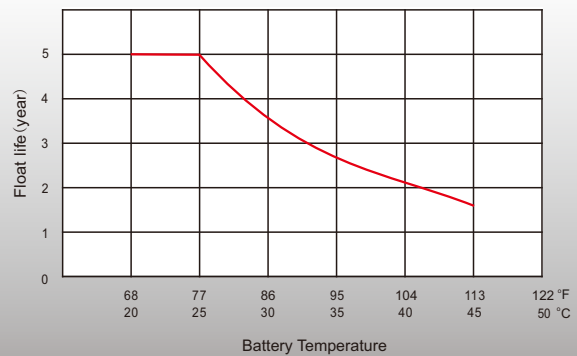

Sales Offices

Sales: 1.800.233.6261

Website: www.adiglobaldistribution.us

www.adiglobaldistribution.ca