

Synthesized Intelligent PIR

# SIP-3020 SIP-4010 SIP-404



The SIP-3020, SIP-4010, and SIP-404 detectors in the REDWALL-V Series are designed for use in small and mid-sized outdoor areas. They have an intelligent detection system that uses data on the ambient environment, such as temperature and illuminance conditions, to automatically adjust the sensitivity.

Mechanisms for easy installation enable accurate adjustment of the detection area at setup, which results in more reliable operation. The optional AVF-1 Area View Finder allows the installer to visually identify the detection area.

The detectors are also equipped with anti-rotation and anti-masking. They can also detect vandalism or tampering on the units. These functions provide greater security in operations.

Detectors in the REDWALL-V Series are ideal for triggering outdoor camera systems where high performance is required.

## FEATURES

### Intelligent PIR Detection System

- Three dual pyro-elements with patented Double Conductive Shielding
- Detection of ambient temperature and illuminance for automatic sensitivity management
- Advanced detection algorithm
- Anti-rotation with 3-axis accelerometer
- Anti-masking with photo-beam
- Sensitivity selector for near / far area independently
- Detection logic selector
- Detection range selector
- Independent N.C. and N.O. outputs
- Adjustable alarm interval time
- Reinforced polycarbonate housing

## OPTIONS

- AVF-1 Area View Finder
- SIP-HU Heating Unit
- OPM-WT Audible Walk Tester
- SIP-MINI HOOD Sun/Snow shield


## SPECIFICATIONS

Model	SIP-3020	SIP-4010	SIP-404
Detection method		Passive infrared	
Coverage	30 x 20 m (100 x 65 ft.)	40 x 10 m (130 x 33 ft.)	40 x 4 m (130 x 13 ft.)
Power input		11-16 VDC 22-26 VAC	
Current draw		35mA max. (12VDC) 70mA max. (24 VAC)	
Mounting height		2.3 to 4 m (7.6 to 13 ft.)	
Sensitivity selector		Far: SH/H/M/L Near: SH/H/M/L	
Range selector		Far: On/Off	
Alarm output		N.O., N.C., 28 VDC 0.2A max.	
Alarm interval period		Off/15, 30, 60 sec.	
Trouble output		N.C., 28 VDC 0.2 A max.	
Tamper output		N.C., 28 VDC 0.1 A max.	
Alarm period		Approx. 2 sec.	
Warm-up period		Approx. 60 sec.	
Operating temperature	-25 to +60°C, -40 to +60°C with optional heating unit (-13 to +140°F, -40 to +140°F with optional heating unit)		
IP rating		Main unit: IP65 Chassis: IP55	
Dimensions (H x W x D)		227 x 102 x 266 mm (9.0 x 4.0 x 10.5 in.)	
Weight		1.2kg (42 oz)	


\* Specifications and design are subject to change without prior notice.

## DETECTION AREAS


**SIP-3020**

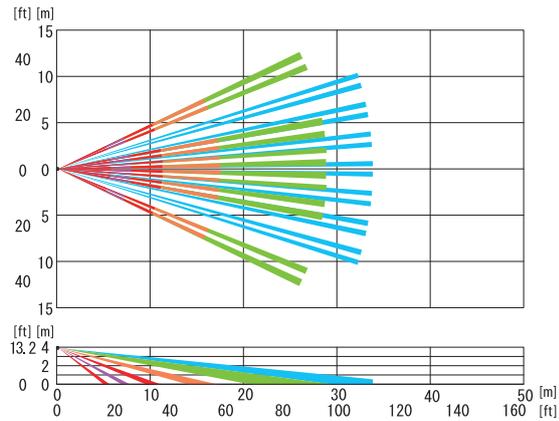

**SIP-4010**

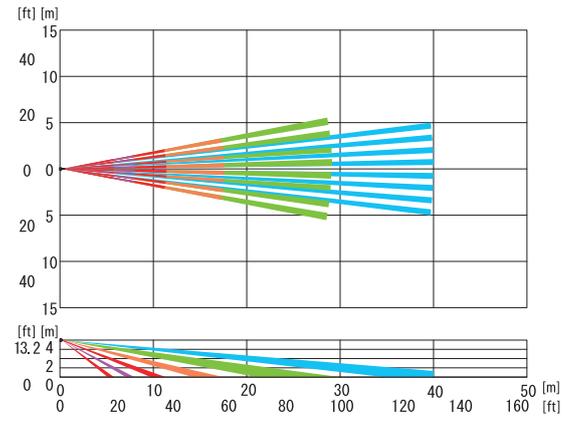

**SIP-404**

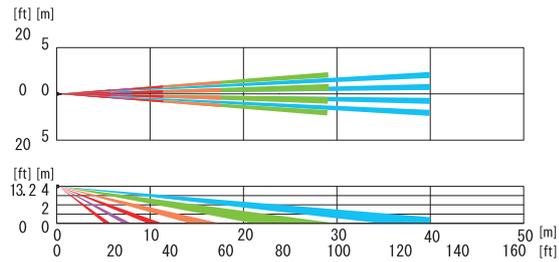

## DIMENSIONS

