

16-2 Unshielded Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725160

Applications:


This document establishes the specifications for a plenum rated one pair unshielded cable used for communication and audio applications.

Construction Details:

Number of Conductors: 2/C
Conductor: 16AWG Stranded Bare Copper
Insulation Material: Remguard Plenum Polymer
Nominal Insulation Thickness: 0.007 in.
Nominal Insulation Diameter: 0.072 in.
Color Code: Black, Red
Jacket Material: Remguard Plenum Polymer
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.175 in.
Surface Print: 3122598 CMP/FPLP 16AWG
C(ETL)US FT6 MADE IN USA +
Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.



Technical Details:

Temperature Rating

Operation: -2°C to +60°C

Nominal Weight: 25 lbs. / 1,000 ft.

Standards:

- NEC Article 800, 760
- CMP, FPLP Rating FT6


Codes & Listings:

- C(ETL)US CMP

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



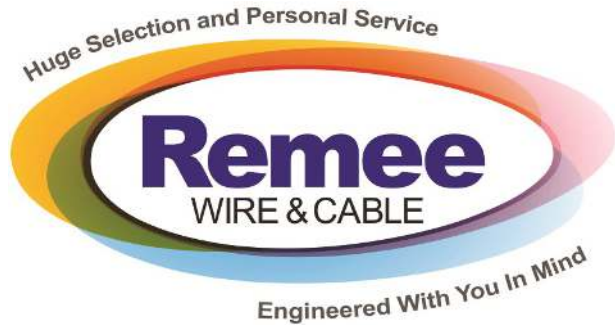

16-2 Unshielded Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725160

Note: While Remeë Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeë Products Corp. does not guarantee that it is error-free, nor does Remeë Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeë Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeë Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

