

# Single Motor Low Voltage Control (LVC)



SPECIFICATION DATA


**SUGGESTED SPECIFICATIONS:** Electrical rating 115 VAC 60 Hz 5A. The single motor LVC is used to operate Da-Lite single motor electric screens from one or more locations, remote control, or for integration into a control panel system. Operated by a 3-button momentary, dry contact switch. Any combination of single or multiple 3-button switches, optional radio frequency remote or infrared remote, or a control panel with momentary dry contacts may control the LVC. Control board to be mounted in a galvanized steel housing measuring 2 1/4" H x 4 1/2" W x 10 1/2" L. Standard knockouts provided on housing for 1/2" conduit connections. Control to be listed by Underwriter's Laboratories.



## WIRING

**NOTE:** Do not seal in - allow access.

**NOTE:** Recommended Wire Size: 14-18 AWG

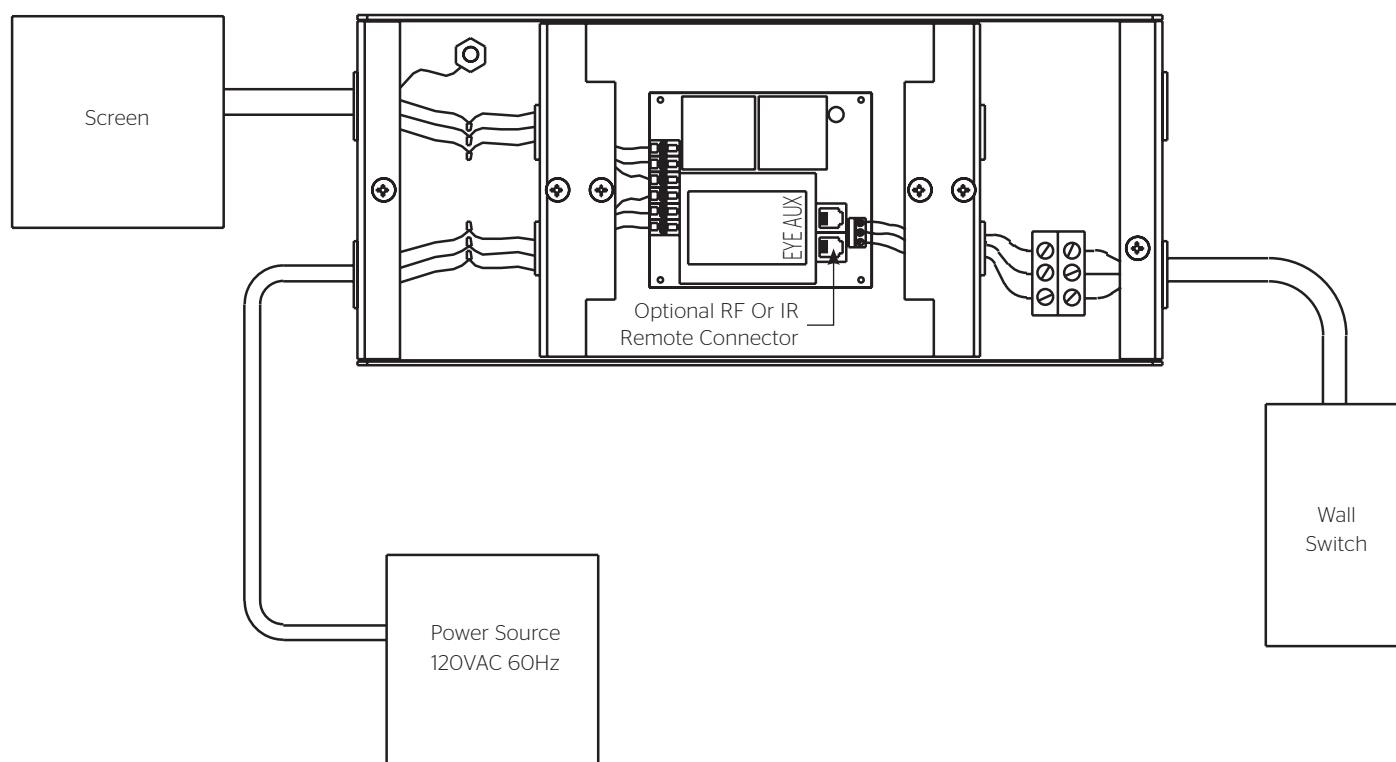

**PRODUCT NOTES**

- Specifications are subject to change without notice.

**WHEN ORDERING, MARK APPROPRIATE SELECTIONS:**

1. Select optional accessories:
  - Radio Frequency Remote Control.
    - Radio Frequency Range Extender available
  - Infrared Remote Control.
  - Additional 3-button Wall Switch.
  - 220V Model Available.
  - Key Locking Cover Plate for 120V or Low Voltage Control (LVC).



**A BRAND OF MILESTONE AV TECHNOLOGIES**

www.milestone.com

**P** 800.622.3737 / 574.267.8101

**F** 877.325.4832 / 574.267.7804

**E** info@da-lite.com

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2018 Milestone AV Technologies. DL-0351 (Rev. 1) 0218.  
Da-Lite is a registered trademarks of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

Project Name: _____
Architect: _____
Contractor: _____ Phone: _____
Reseller: _____ Phone: _____