



Model NV-226J-PV UTP Video Transmitter +12VDC Converter



Features:

- Extended distance camera power and video routed through UTP and RJ45
- Supports 12VDC cameras with onboard regulated power
- Use with NVT's PVD™ Power Supply Hubs and Cable Integrators
- Up to 3,000ft (1km) with a NVT DigitalEQ™ Hub or active receiver, (see Power Distance Chart)
- Up to 1,500ft (460m) with a NVT StubEQ™ Hub
- Frequency response DC to 10MHz (see Recommended Distance Chart)
- Up to 750ft (225m) with NVT's Passive Receiver Hubs (see Power Distance Chart)
- Exceptional interference rejection
- Built-in transient protection
- Limited lifetime warranty

The NV-226J-PV Video Transmitter +12VDC Converter is a passive (non-amplified) video transmitter combined with a 24VAC-to-12VDC converter. Designed to fit on the back of a fixed 12 VDC camera, this unit is architected to convert 24VAC power from the control room, while delivering real-time baseband (composite) video at extended distances, all over one 4-pair UTP cable.

The unparalleled interference rejection and low emissions of the NV-226J-PV allows video and low-voltage power to coexist within the same 4-pair cable, using structured (EIA 568B) wiring practices. It is recommended that the 24VAC not share the same jacketed wire bundle with telecom or datacom signals.

The NV-226J-PV carries a limited lifetime warranty, is UL and cUL listed, and is CE, WEEE, and RoHs compliant.

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • FAX (+1) 650.326.1940
nvt.com • www.nvt.com/email



Model NV-226J-PV

UTP Video Transmitter +12VDC Converter

Technical Specifications

WIRE DISTANCE (Power Distance Chart)

Maximum wire distance is dependent on the power supply's voltage, wire gauge, and camera wattage:

Fixed 12VDC Camera used with NV-226J-PV		
Power Supply Voltage	24 VAC	28 VAC
B&W Camera, 2.4 W		
2-pair 24 AWG	1,586ft (482m)	2,220ft (677m)
2-pair 23 AWG	1,999ft (609m)	2,799ft (853m)
Color Camera 4.8 W		
2-pair 24 AWG	795ft (242m)	1,113ft (339m)
2-pair 23 AWG	1,002ft (306m)	1,403ft (428m)

Notes: Actual distance will depend on the camera's inrush and operating current, minimum operating voltage, and the wire's environmental temperature. Please consult NVT Customer Support for further information.

Wire should be category rated Unshielded Twisted-Pair (UTP) cable. Low voltage camera power, video, and RS-422 or RS-485 telemetry may be sent within the same wire bundle. Do not run 24VAC or 28VAC in the same wire bundle with analog telecom signals. However you may share the same wire/cable tray.

An online wire Power Distance Calculator is available at www.nvt.com under Product Support.


VIDEO

Frequency response	DC to 10 MHz
Attenuation	0.5 dB typ
Common-mode / Differential-mode rejection	
50 KHz to 10 MHz	60 dB typ
Impedance	
Coax, male BNC	75 ohms
UTP, RJ45 Data Connector	100 ohms

CAMERA POWER

Input voltage	13 to 30 VAC/DC
Input current	Class II SELV floating power supply
Output voltage	12VDC, regulated
Output current	400 mA

RJ45 PINOUTS



WIRE TYPE

Network Wiring	One Unshielded Twisted Pair 24-22 AWG (0,5-0,64mm)
Category Type	2 or better
Impedance	100 ± 20 ohms
DC Loop Resistance	52 ohms per 1,000ft (18 ohms per 100m)
Differential Capacitance	19 pF/ft max (62 pF/m max)

MECHANICAL

Body height	2.25in (57mm)
Body width	1.52in (39mm)
Body depth (not including connectors)	.81in (20mm)
Product Weight	1.8oz (50g)
Packaged Weight	0.16lb (73g)

ENVIRONMENTAL


Temperature	-4 to +167 °F (-20 to +75 °C)
Humidity (non-condensing)	0 to 95%
Transient Immunity	per ANSI / IEEE 587 C62.41

REGULATORY



Specifications subject to change without notice.

Typical Application

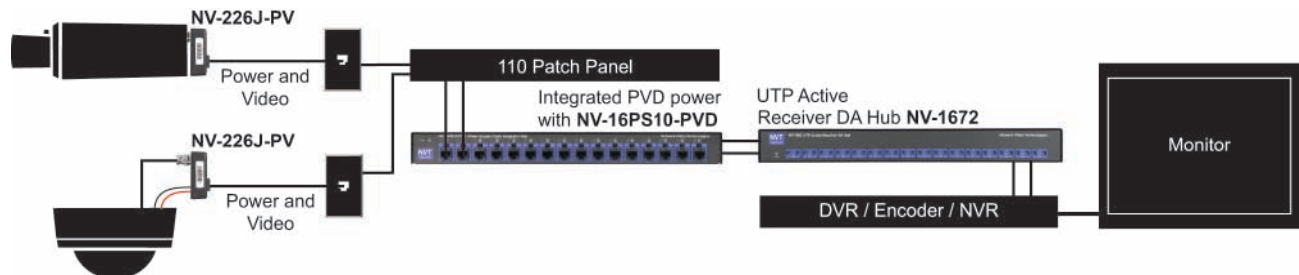




Model NV-226J-PV

UTP Video Transmitter +12VDC Converter

Distance Recommendations

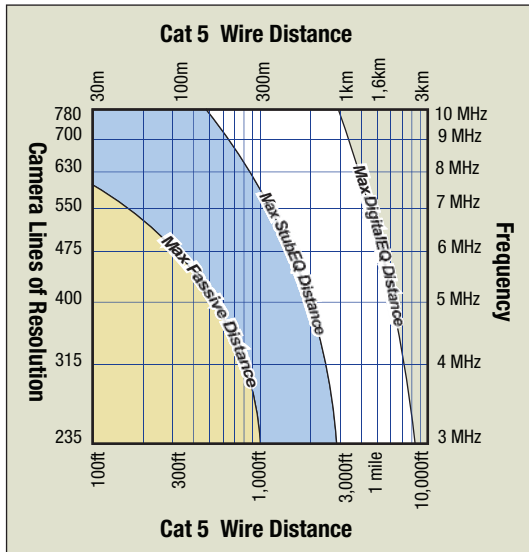

Good

Passive Transceivers & Hubs

- UTP transmission 0-750ft (225m)
- No power required
- Built in transient protection
- Lifetime warranty

Best

DigitalEQ Hubs

- UTP Transmission 0-3,000 ft (1 Km)
- Fully automatic 4-band equalization
- Automatic polarity reversal
- 2 or 4 BNC outputs per channel (16- & 8-port models)
- Built-in "at-a-glance" diagnostics
- Built-in ground lifting
- Built-in transient protection
- 2 ft (60 cm) coax cables included
- Lifetime warranty

Better

StubEQ Hubs

- UTP Transmission 0-1,500ft (460m)
- Fully automatic 2-band equalization
- Built-in ground lifting
- Built-in transient protection
- Compact rack mount design
- Lifetime warranty

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • FAX (+1) 650.326.1940
nvt.com • www.nvt.com/email