


Industrial DIN Rail Mounted Power Supply

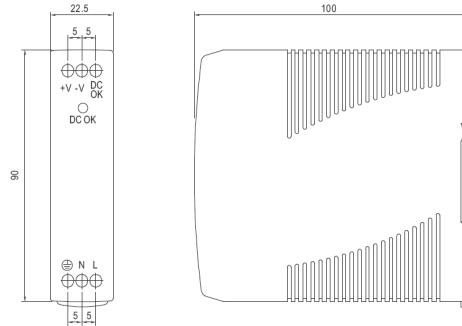

Ordering Information

25135
24VDC, 10 Watts – DIN Rail Mount

CBCE



Features

- Universal AC input range
- Protected against:
 - Overload
 - Over Voltage
- Convection air cooling
- DIN Rail mountable
- UL 508 approved
- Full load burn in test
- RoHS compliant

Specifications

Output	Voltage	24VDC
	Current Rating	42A
	Power Rating	10 Watts
	Ripple & Noise Max	150mVp-p
	Voltage Tolerance	±2.0%
	Line Regulation	±1.0%
	Load Regulation	±2.0%
	Setup, Rise Time	1000ms, 30ms
Hold Up Time	25ms/115VAC	
Input	Voltage Range	85~264VAC, 120~370VDC
	Frequency Range	47~63Hz
	Efficiency	84%
	AC Current (Typical)	.33A@115VAC .21A@230VAC
	Inrush Current (Cold)	35A@115VAC 70A@230VAC
	Leakage Current	<1mA@240VAC
Protection	Overload	105% Rated Output
	Overvoltage	27.6~32.4V
Dimensions	Width: 0.89" [22.5 mm] Depth: 3.94" [100 mm] Height: 3.54" [90 mm]	
Environment	Operating: -20°C to 70°C Storage: -40°C to 85°C Humidity: 20% to 90% (non-condensing)	
Weight	0.37 lbs. [0.17 kg]	
MTBF	584Khrs	
Certifications	Safety: UL508, TUV EN60950-1, NEC Class 2/LPS EMC Emissions: EN55011, EN55022, CISPR22, EN61204-3 Class B, EN61000-3-2, EN61000-3-3 EMC Immunity: EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN55024, EN61000-6-1, EN61204-3 A IEC60068-2-6 (Vibration)	
Warranty	Lifetime	

Switches