

IDM4012SS Mount

WALL MOUNT, STAINLESS STEEL, FOR SPECTRA® SPECIALTY DOMES

Product Features


- For Use with Spectra® Series Specialty Domes
- Can Also Be Used with Other Pendant Domes using 1.5-inch NPT Threaded Pipe for Mounting
- Constructed of Type 304 Stainless Steel
- Mounts Directly to Vertical Load-Bearing Surface for Wall Mount Applications
- Supports up to 75 Pounds (34 kg)
- Includes Cable Feedthrough Hole



The **IDM4012SS** wall mount is designed specifically for the Stainless Steel and Pressurized Spectra® Series Dome Systems (Spectra III™ or newer models). The mount is constructed of type 304 stainless steel with a gray polyester powder coat finish making it ideal for harsh environmental installations.

IDM4012SS can be attached directly to any vertical load-bearing surface and is designed to support up to 75 pounds (34 kg). Conduit accesses are available through the back mounting plate or through the bottom of the mount where a flexible metal conduit fitting can be installed. A gasket is provided for the back mounting plate to protect the interior of the **IDM4012SS**.

The mount is threaded for 1.5-inch NPT pipe, and is compatible with any Spectra®, DF5, or DF8 Series pendant back box.

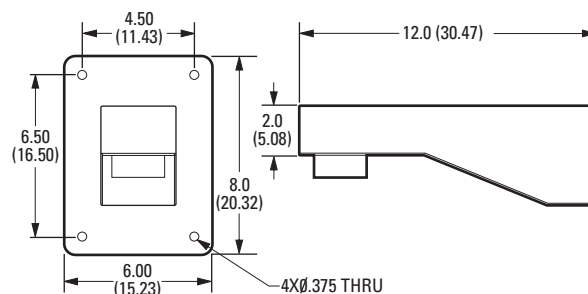

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



TECHNICAL SPECIFICATIONS

MODEL

IDM4012SS Wall mount with cable feedthrough and conduit access holes for use with Spectra® Stainless Steel and Pressurized dome systems

GENERAL

Construction Type 304 stainless steel
Finish Gray polyester powder coating
Environment Indoor/outdoor
Mounting Method Secure with four stainless steel 5/16-inch fasteners (not supplied)
Cable Entry Two holes on mounting plate for conduit access and one hole on the bottom of the mount for conduit access
Maximum Load 75 lb (34 kg)
Unit Weight 4.9 lb (2.22 kg)
Shipping Weight 7.0 lb (3.17 kg)

OPTIONAL MOUNT ADAPTERS

CM400	Corner mount adapter
PA402	Pole mount adapter
PP300L/PP301L	Parapet corner adapter
PP400	Parapet wall adapter
PP4348	Rooftop parapet adapter



Pelco, Inc. Worldwide Headquarters:
3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX: (800) 289-9150
International Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120
www.pelco.com

▲ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.
▲ **ADVERTENCIA:** Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov.
▲ **AVERTISSEMENT:** Cancer et Troubles de l'appareil reproducteur - www.P65Warnings.ca.gov.

Pelco, the Pelco logo, and Spectra are registered trademarks of Pelco, Inc.
Spectra III is a trademark of Pelco, Inc.
Product specifications and availability subject to change without notice.
©Copyright 2007, Pelco, Inc. All rights reserved.