

SMARTCELL

WIRELESS GSM TERMINAL



- Wireless GSM compatible with Quantum products , AeGIS products and SMARTCOMM
- Suitable for an application where routing telephone cables are impossible or labor intensive.
- May lower your telephone bill since cellular service has flat nationwide rate
- Connect to Alarm systems to realize wireless alarm(for security use)
- Strong signals with high gain antenna
- Support SIM card (1.8V, 3V)

SPECIFICATIONS

POWER: 12 VDC 1A

BACKUP POWER: Li-ion battery 7.2V 1300mAh. Standby 24 hours, talk time 2.5 hours

GSM 900/1800 MHz dual band; GSM850/900/1800/1900 MHz quad band. *Note:* will not work on CDMA
Steady Industrial Module (SIM340) supported 1.8V and 3V
Two telephone (RJ11) output
DTMF dialing

CONSTRUCTION: Plastic ABS

DIMENSION: 8-1/8"(L) x 5"(W) x 1"(H), does not include antenna



WEIGHT: 3 lbs

WARRANTY: *12 months*

ORDER PART NUMBER

SCWT Smartcell Wireless GSM Terminal

APPLICATIONS

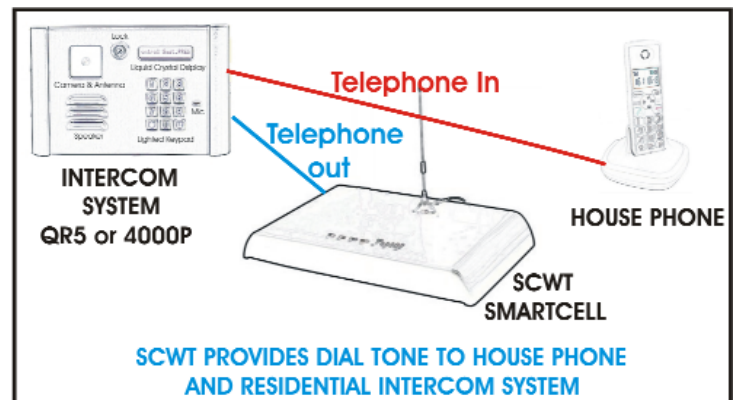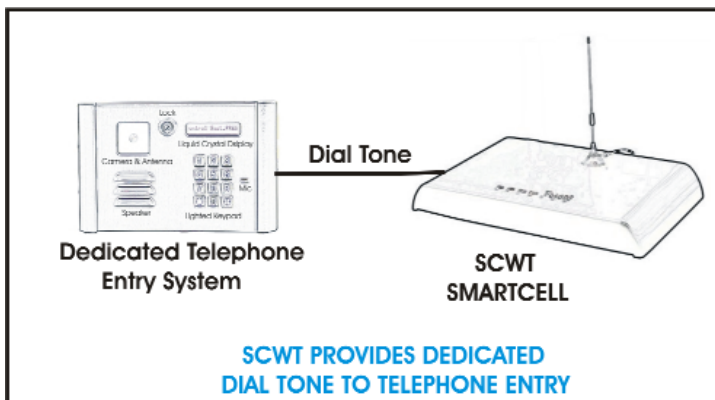

PACHCO

Since 1978

Home of Telephone Entry Access Control Systems

San Clemente, California
1-888-678-7224
www.pach-co.com