



Model SLM200 shown with mounting base options (ordered separately)



► Model SLM200

StreamLine® Modular High Output Multifunctional Bright LED Beacon

Model SLM200 offers a multifunctional LED beacon with high optical performance. Developed with a multiple input technology, Model SLM200 allows three separate light effects (flashing, strobe and random) controllable via independent electric contacts. The possibility to select a different light effect per channel is done through an integrated button.

The flashing light mode has a powerful effect ideal for attracting attention without alarming. If immediate attention is needed, the strobe is the ideal option. The random light pattern is unique in its ability to irregularly flash while drawing attention.

Model SLM200 body material is a self extinguishing polycarbonate material with high impact and UV resistance suitable for outdoor applications.

FEATURES

- Compatible with 12-24VAC/DC or 120-240VAC*
 - PLC compatible with PNP or NPN connections (Except Dock Base, only NPN)
 - Three separate inputs: flashing, strobe and random
 - 50,000 hour LED
 - Five lamp/lens colors: Amber, Blue, Clear, Green and Red
 - Seven mounting base options
 - Type 4X, IP66 enclosure
 - IP69K** compliant
 - CE Certified
 - UL and cUL Listed
- * Voltage is dependent on selected base (sold separately)
 ** IP69K with select bases SLMBBS, SLMBD, SLMBP and included SLM-RR accessory

MODEL	VOLTAGE	FLASH RATE/MINUTE (FLASH MODE)	FLASH RATE/MINUTE (STROBE MODE 1)	FLASH RATE/MINUTE (STROBE MODE 2)
SLM200*	12-24VAC/DC or 120-240VAC	150 (+/-10)	85 (+/-10)	120 (+/-10)

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red

MAXIMUM OPERATING CURRENT (mA)					
12VDC	24VDC	12VAC	24VAC	120VAC	240VAC
300	150	510	360	100	70


Weight (unit(s) + base = total weight)

SLM200	VOLTAGE	SHALLOW BASE	DEEP BASE	WALL MOUNT	PIPE MOUNT	TWIN WALL MOUNT	2-STACK DOCK BASE	3-STACK DOCK BASE
7.05 oz	12-24VAC/DC	2.12 oz 0.06 kg	4.23 oz 0.12 kg	6.70 oz 0.19 kg	5.29 oz 0.15 kg	9.17 oz 0.26 kg	14.46 oz 0.41 kg	21.16 oz 0.60 kg
0.20 kg	120-240 VAC	–	6.0 oz 0.17 kg	8.47 oz 0.24 kg	6.70 oz 0.19 kg	12.35 oz 0.35 kg	16.58 oz 0.47 kg	24.69 oz 0.70 kg

StreamLine® Modular High Output Multifunctional LED Beacon (SLM200)

SPECIFICATIONS

Lamp Life: 50,000 Hours
 Light Source: LED
 Operating Temperature: -22°F to 131°F -30°C to 55°C



SLMB23W



SLMB23N



SLM-RR



SLMB23V














ACCESSORIES FOR DOCK BASE

HOW TO ORDER

- Specify model number SLM200 and color
- Specify required mounting base (see chart)
- Optional dome guard
 For shallow mounting base (SLMDG3)
 For deep mounting base (SLMDG4)
- Accessories for Twin and Wall Mount Bases
 Cable Gland, M20, Gray, 2 Pack (K77700416)
 Cable Gland, M20, Red, 2 Pack (K77700416-01)
- Accessories for Pipe Mount Base
 1" NPT Adapter (SLMNPT1)
 1/2" NPT Adapter (SLMNPT2)
- Accessories for Dock Base
 Wall Mount Bracket (SLMB23W)
 1/2" NPT Adaptor (SLMB23N)
 Retaining Ring (SLM-RR)
 Light Visor (SLMB23V)

MOUNTING BASE OPTIONS

Mounting bases are rated Type 4X. Final product rating is determined by top module. In combination with SLM200 and included/required retaining ring (SLM-RR), the unit is Type 4X, IP66. For IP69K compliance, pair with shallow, deep or pipe mount base.

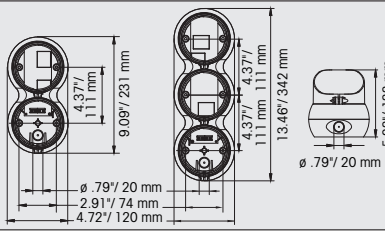	Model Number	Base Color	Voltage	
 Shallow Base	SLMBS-012-024GY	Gray	12-24VAC/DC	
	SLMBS-012-024R	Red	12-24VAC/DC	
 Deep Base	SLMBD-012-024GY	Gray	12-24VAC/DC	
	SLMBD-012-024R	Red	12-24VAC/DC	
	SLMBD-120-240GY	Gray	120-240VAC	
 Wall Mount	SLMBW-012-024GY	Gray	12-24VAC/DC	
	SLMBW-120-240GY	Gray	120-240VAC	
 Pipe Mount	SLMBP-012-024GY	Gray	12-24VAC/DC	
	SLMBP-120-240GY	Gray	120-240VAC	
 Twin Wall Mount	SLMBT-012-024GY	Gray	12-24VAC/DC	
	SLMBT-120-240GY	Gray	120-240VAC	
 2-Stack Dock Base  3-Stack Dock Base	SLMB2-024GY	Gray	24VAC/DC	
	SLMB2-120-240GY	Gray	120-240VAC	
	SLMB3-024GY	Gray	24VAC/DC	
	SLMB3-120-240GY	Gray	120-240VAC	
Note: Dock bases allow one function per position and include visors. Dock bases are NPN compatible only.				

Rev. B