

Vi2601

MaxiiPower™ Extended Coax PoE Midspan

Features

- High power Midspan with built-in Ethernet extender for long distances
- MegaPixel Certified (MPC™), ideal for high bandwidth requirements of MegaPixel cameras
- Built-in power supply provides PoE power up to 36W
- Supports Jumbo Frame transmission
- In-rush current sensing prevents shut down during camera events such as start-up, day/night, auto back focus heater and blower turn on, and PTZ operation
- LED Indicator provides PoE power status
- Type tested to RFC-2544 TCP/IP network bandwidth packet transmission standards.
- Saves time and installation costs by using existing coax cable
- Data rate selectable to for maximum bandwidth utilization
- Tested and approved for high bandwidth transmission including 4KUHD cameras
- Complies to major IEEE standards and RFC network protocols for UDP, TCP/IP, HTTP/HTTPS
- Limited lifetime warranty



Applications

- Powering IP cameras at extended distances
- Retrofit analog CCTV installations into digital systems
- Powering IP devices such as Access Control, wireless access points, emergency response systems and VoIP phones using existing coax

MaxiiPower™ Vi2601 extended Midspan is designed to meet the most demanding IP camera data and PoE requirements at extended distances. It can provide full 802.3af and 802.3at up to 36W at extended distances over Coax using Vigitron's unique Symmetric Bandwidth (SBW™) technology. The transmission data rate is automatically set to 10 or 100Mbps depending on the distance.

It is fully transparent to any standard Ethernet network and higher layer protocols and require no IP setting or configurations. The combined Ethernet extender technology and PoE Midspan simplifies the installation and lowers the cost of the system by eliminating the need for standard PoE midspans with far limited PoE power and protection capability.

The Vi2601 provides an LED to indicate power and transmission status. It operates in auto mode with no programming required.

They are ideal for a wide range of CCTV and IT applications that require high power such as IP cameras, wireless access points or VoIP installed at extended distances.



Technical Specification*

Electrical

Ethernet Interface	Standard 10/100BaseT
Coax	RG59 (or higher quality)
Ethernet Rate	10/100Mbps, Auto-select Full speed / Full duplex at max. rated distance
Power Output	56VDC, 36W
AC Input Power	100-240VAC, 50-60Hz, 0.5A max.
PoE Standard	IEEE 802.3af PoE, IEEE 802.3at PoE
Status LEDs	PoE: Green
Data Interfaces and Compliances	RFC 768 UDP, RFC 2068 HTTP RFC 793 TCP, RFC 791 IP RFC 1783 TFTP, RFC 894 IP over Ethernet RFC 2544 TCP/IP Packet Transmission
Connectors	Ethernet Input Interface: Shielded RJ45 Extended Output Interface: Female BNC Main Power: IEC 320-C14 Inlet
Jumbo Frame	Yes
Packet Handling	9600 Bytes

Mechanical

Dimensions	1.78x2.54x4.95 in., 4.52x6.45x12.57 cm (HxWxL)
Weight	0.71 lb, 321 g
Material	Extruded Aluminum

Environmental

Humidity	0 to 90%, Non-condensing
Temperature	Operating: -10°C to +50°C Storage: -40°C to +80°C

Included Accessories

Molded IEC 7 ft. (200 cm) power cord

*Specifications subject to change without notice.

Ordering Information


PART No.	Description
Vi2601	Single Port Extended Coax PoE Midspan
Vi2400A	Single Port Mini Coax Ethernet Extender
Vi2401A	Single Port Coax Ethernet Extender

Data and PoE Distance**

Data Rate	Data+ 802.3at PoE Class 2 (6.5W)	Data + 802.3af PoE Class 3 (12.95W)	Data + 802.3at PoE Class 4 (25.5W)
10BaseT	3,000 ft./914 m	1,500 ft./457 m	500 ft./152 m
100BaseT	3,000 ft./914 m	1,500 ft./457 m	500 ft./152 m

*Specifications subject to change without notice.

**Distance figures are based on RG59 coax cables using in house testing mirroring typical installations. Factors such as cabling, connections, use of power and environmental conditions may affect actual distances and should be taken into consideration.

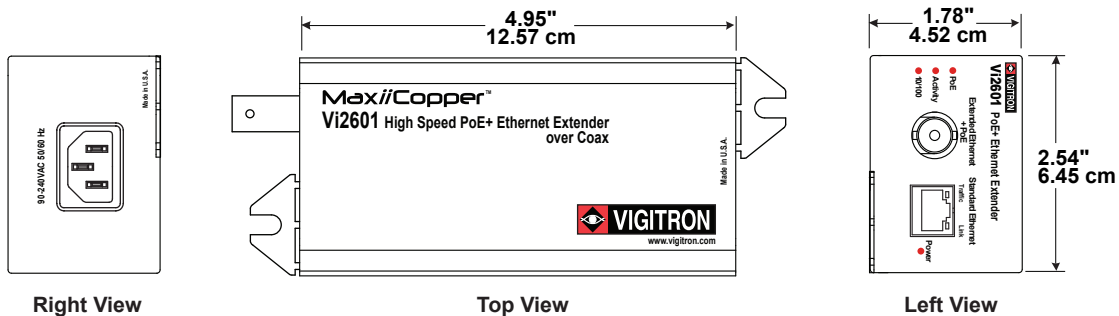


TEL (+1) 858-484-5209 • FAX (+1) 858-484-1205


7810 Trade Street, Suite 100, San Diego, CA 92121, USA • support@vigitron.com • www.vigitron.com

© Copyright 2019 Vigitron, Inc.


Application Diagrams

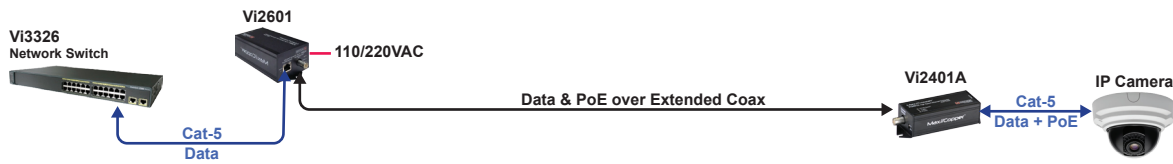

The Vi2601 + Vi2401A provide a reliable power source for the long distance and higher power requirements of PTZ domes and IP cameras with power surges due to accessory features such as day/night, LED operations, and auto focus with heater/blower functions.

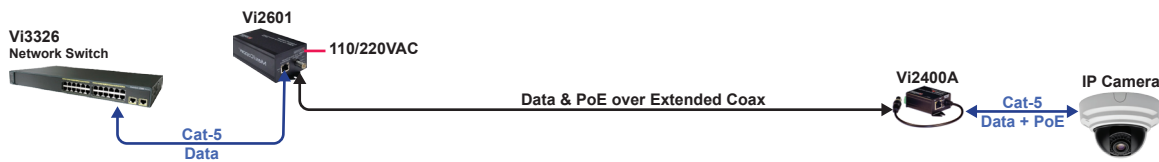

The Vi2601 and Vi2400A provide a reliable power source for long distance high power installations. The Vi2400A's compact size fits in many environmental enclosures such as J-box, 4 square, and back boxes of many IP cameras to provide both security and environmental protection.

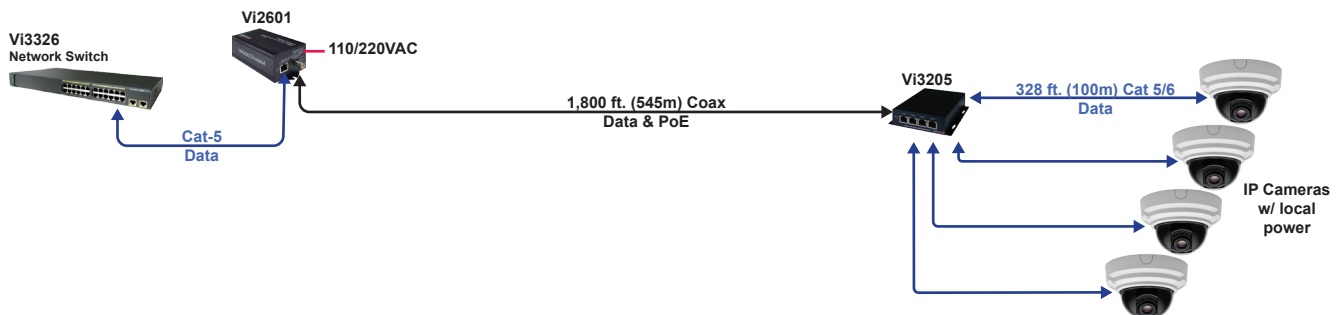

The Vi2601 + Vi3205 eliminates the need for any local network switch power, while providing a single coax path for transmitting four cameras from a remote location. This combination simplifies installation and reduces costs.