

STH-15S-ULC supervised speakers



STH-15SR-ULC (Red)



STH-15S-ULC (Gray)



SHMP-R
Adapter plate

Description

The Wheelock STH-15S-ULC supervised horn loudspeakers are equipped with a compression driver providing up to 15 watts RMS power handling capability, superior intelligibility and dispersion to achieve maximum sound projection and penetration.

Weather-resistant metal construction and reentrant acoustic path assure protection against water, humidity and corrosion. The mounting bracket allows directional sound dispersion via vertical and horizontal positioning. Provisions are also included for surface or strap mounting to pillars and I-beams.

All models include a built-in 25/70 V transformer featuring a screwdriver adjustable, 7-position watt/impedance selection switch. Wiring terminals are protected with a vandal-resistant adapter cover for control equipment utilizing cable or conduit.

A built-in capacitor is provided on both models for line supervision.

All models meet or exceed ULC's requirements for speakers and are capable of operating within an ambient temperature range of 150° F (66° C) to -31° F (-35° C). Models comply with ULC Standard CAN/ULC-S541-2016 for speakers.

Specifications: General

- Dispersion angle: 70 Degrees

Specifications: ULC Rating

- Power rating: 15 Watt continuous
- Frequency response: 400–4,000 Hz (nominal)
- Sensitivity: 102 dB @ 15 Watts @ 10 ft.

Applications

The Wheelock STH-15S-ULC supervised horn loudspeakers are surface-mounting, high-efficiency units for life safety and communication system applications. When used with compatible control equipment, they provide high-intelligibility voice reproduction and signal transmission for indoor or outdoor emergency alarm and protective signaling.

Features & benefits

- Approvals include ULC Standard CAN/ULC-S541-2016 for speakers.
- 15-Watt high-efficiency compression driver
- Weather-resistant, vandal-resistant aluminum construction assures protection against water, humidity and corrosion
- Reentrant acoustic path
- 25/70 V transformer featuring a screwdriver adjustable, 7-position watt/impedance selection switch
- Capacitor for line supervision
- STH-15S-ULC gray-baked epoxy finish; STH-15SR-ULC red-baked epoxy finish
- Simplified, universal-mounting bracket adjustable in horizontal and vertical planes with banding slots for beam or pillar mounting
- Installation terminals and power selector are recessed mounted, and protected by the metal interface adapter, or clear plastic shield

Note: Please read these specifications and associated installation instructions before using, specifying, or installing this product. Visit Eaton.com/massnotification for current installation instructions.

Drawings

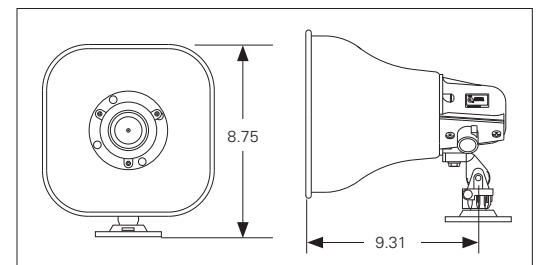


Figure 1. STH-15S-ULC front and side views



Powering Business Worldwide

Table 1. Specifications and ordering information

Model Number	Order Code	Finish	Description	Weight
STH-15S-ULC	8207	Gray	7.9" Dia. Supervised, Weatherproof, 15 Watt Horn, Loudspeaker with Transformer, Aluminum	4.5 lbs. (2.0 kgs.)
STH-15SR-ULC	0046	Red	7.9" Dia. Supervised, Weatherproof, 15 Watt Horn, Loudspeaker with Transformer, Aluminum	4.5 lbs. (2.0 kgs.)
SHMP-R	8154	Red	UL Listed adapter plate, designed to mount the STH-15SR-ULC horn speaker to a RSSP strobe mounting plate. For surface mounting applications, the SBL2-R (6988) surface-mount backbox is required.	—

Table 2. STH-15S-ULC Power selections

Setting	Impedance (Ohms)	70.7 Volts		25 Volts	
		Watts	dB @ 10 ft.	Watts	dB @ 10 ft.
1	5,554	0.9W	93	Not used	Not used
2	2,777	1.8W	96	Not used	Not used
3	1,315	3.8W	96	0.48W	90
4	666	7.5W	99	0.94W	90
5	333	15.0W	102	1.8W	93
6	83	Not used	Not used	7.0W	99
7	42	Not used	Not used	13.9W	102

Architects and engineers specifications

The supervised horn loudspeaker shall be a STH-15S-ULC/STH-15SR-ULC or approved equal. The horn shall be weather resistant and constructed of heavy-gauge, treated aluminum. The horn shall be able to operate within any ambient temperature environment ranging from -40° C (-40° F) to 66° C (151° F). The horn shall be a double reentrant type with a 15 watt RMS audio power rated compression driver producing a ULC rated 101 dB measured at 15 watts at 10 feet. The horn shall have an impedance selection via a 7-position switch of 5554, 2777, 1315, 666, 333, 83 & 42. Power taps shall be available at 0.9, 1.8, 3.8, 7.5 and 15 watts for the 70-volt line; and 0.48, 0.94, 1.83, 7.0 and 13.9 watts for the 25-volt line. The frequency response range shall be 400–4,000 Hz. The horn shall have a dispersion of 70 degrees. The horn assembly shall be furnished with a mounting bracket that allows adjustment on either a vertical or horizontal plane with a single locking pin and include provisions for mounting, banding or strapping. Wiring terminals shall be fully enclosed, and a vandal-resistant adapter cover shall provide connection protection for cable or conduit. The horn shall be 7.88" W x 8.75" H x 9.31" L (20.0 x 22.2 x 23.9 cm). The horn shall be finished in gray- (STH-15S-ULC) or red- (STH-15SR-ULC) baked epoxy.

Note: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Cooper Wheelock, Inc., dba Eaton, standard terms and conditions.



WE ENCOURAGE AND SUPPORT NICET CERTIFICATION
3-YEAR WARRANTY

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton
Life safety & mass notification solutions
273 Branchport Ave.
Long Branch, NJ 07740
Eaton.com/Lifesafetynotification

© 2021 Eaton
All Rights Reserved
Printed in USA
Publication No. TD450156EN
June 2021



Eaton is a registered trademark.

All other trademarks are property of their respective owners.