



**NDAA/TAA**  
COMPLIANT PRODUCTS


**4K**  
ULTRA HD

**30fps**

## Dimensions

Unit: Inch (mm)

**UNIVERSAL HD COAX**  
UTC

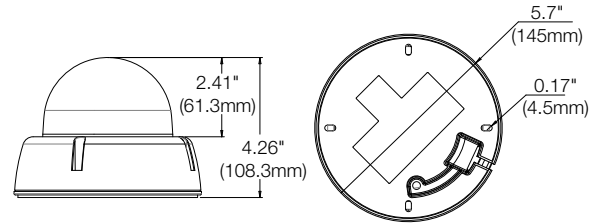

## Summary

Featuring Star-Light Plus™ color in near-total darkness, the 4K Universal HD over Coax® cameras are NDAA/TAA compliant, delivering crystal-clear images and support HD-Analog, HD-TVI, HD-CVI and all legacy analog signal. The weather resistant vandal dome cameras are IP66 rated and can be controlled via the same coax cable using UTC. All Star-Light Plus™ 4K cameras are engineered to work with our VMAX® A1 4K™ DVRs using your existing coax infrastructure for a cost-effective, high resolution surveillance solution.

## Features

- Universal HD over Coax® technology with HD-Analog, HD-TVI, HD-CVI and all legacy analog signal support
- Star-Light Plus™ color in near-total darkness technology
- 1/1.8" image sensor
- 4K at 15fps, 4MP or 2.1MP/1080p at real-time 30fps
- 3.6 - 10mm vari-focal lens
- True wide dynamic range (WDR)
- OSD control via coaxial (UTC)
- CleanView™ hydrophobic dome coating repels water, dust and grease
- 100' Smart IR™ with intelligent camera sync.
- Smart DNR™ 3D digital noise reduction
- True day/night mechanical IR cut filter
- De-Fog™ extreme weather image compensation
- Auto sensing 24VAC/12VDC with line lock
- Easy icon driven OSD menu with built-in joystick
- Programmable privacy zones
- Auto gain control (AGC)
- Backlight compensation (BLC)
- Auto white balance (AWB)
- NDAA/TAA compliant
- IP66 environmental-rated dust-tight and water-resistant
- IK 10-rated impact-resistant
- 5 year warranty

## Accessories (Optional)



DWC-V1WMW  
Wall mount bracket



DWC-V1CMMW  
Corner mount



DWC-V1JUNCW  
Junction box



DWC-V1CMMW  
Ceiling mount bracket

## Specifications

IMAGE	
Image sensor	4K 1/1.8" CMOS
Active pixels	3864 (H) x 2176 (V)
Scanning system	Progressive scan
Frequency	60Hz/50Hz
Signal technology	Universal HD over Coax® technology with HD-Analog, HD-TVI, HD-CVI to 4K and CVBS
Synchronization	Internal
Resolution	Max 3840 x 2160
Minimum scene illumination	0.1 lux (color) 0 lux (B/W)
Video output	4K @ 15fps 4MP/1440p @ 30fps 2.1MP/1080p @ 30fps
2nd video output	CVBS output for video testing
LENS	
Focal length	3.6 - 10mm
Lens type	Vari-focal p-iris lens
Field of view (FoV)	100.3 - 46.4°
IR distance	100ft range
OPERATIONAL	
Shutter mode	Auto
Shutter speed	1/30-1/30,000
Backlight compensation (BLC)	Yes
Star-Light™ (sense-up)	Off-x32 (not available at 4K)
Wide Dynamic Range (WDR)	Double shutter true WDR
Wide dynamic Range (WDR) dB	120dB
Smart DNR™ 3D digital noise reduction	3D/2D DNR
White balance	Yes
Highlight masking exposure (HME)	Yes
Dynamic range compression (DRC)	Yes
Day/night	Auto, day (color), night (B/W)
Mirror/flip	Yes
Auto gain control	Max 60dB
Motion detection	Yes
Privacy zones	Yes
Sharpness	Yes
Gamma	0.45
De-fog	Yes
RS485/UTP built-in	UTC
ENVIRONMENTAL	
Operating temperature	-4°F - 122°F (-20°C - 50°C)
Operating humidity	10-90% RH (non-condensing)
IP rating	IP66-rated
IK rating	IK10-rated impact-resistant
Other certifications	FCC, CE, ROHS
ELECTRICAL	
Power requirements	DC12V/AC24V dual voltage
Power consumption	DC12V (LED off): 4.27W, 356mA DC12V (LED on): 6.98W, 582mA AC24V (LED off): 3.96W, 290mA AC24V (LED on): 6.38W, 440mA
MECHANICAL	
Material	Aluminum vandal housing, polycarbonate dome
Dimensions	5.7" x 4.26" (145 x 108.3 mm)
Weight	1.98lbs (0.9kg)
Warranty	5 year warranty